



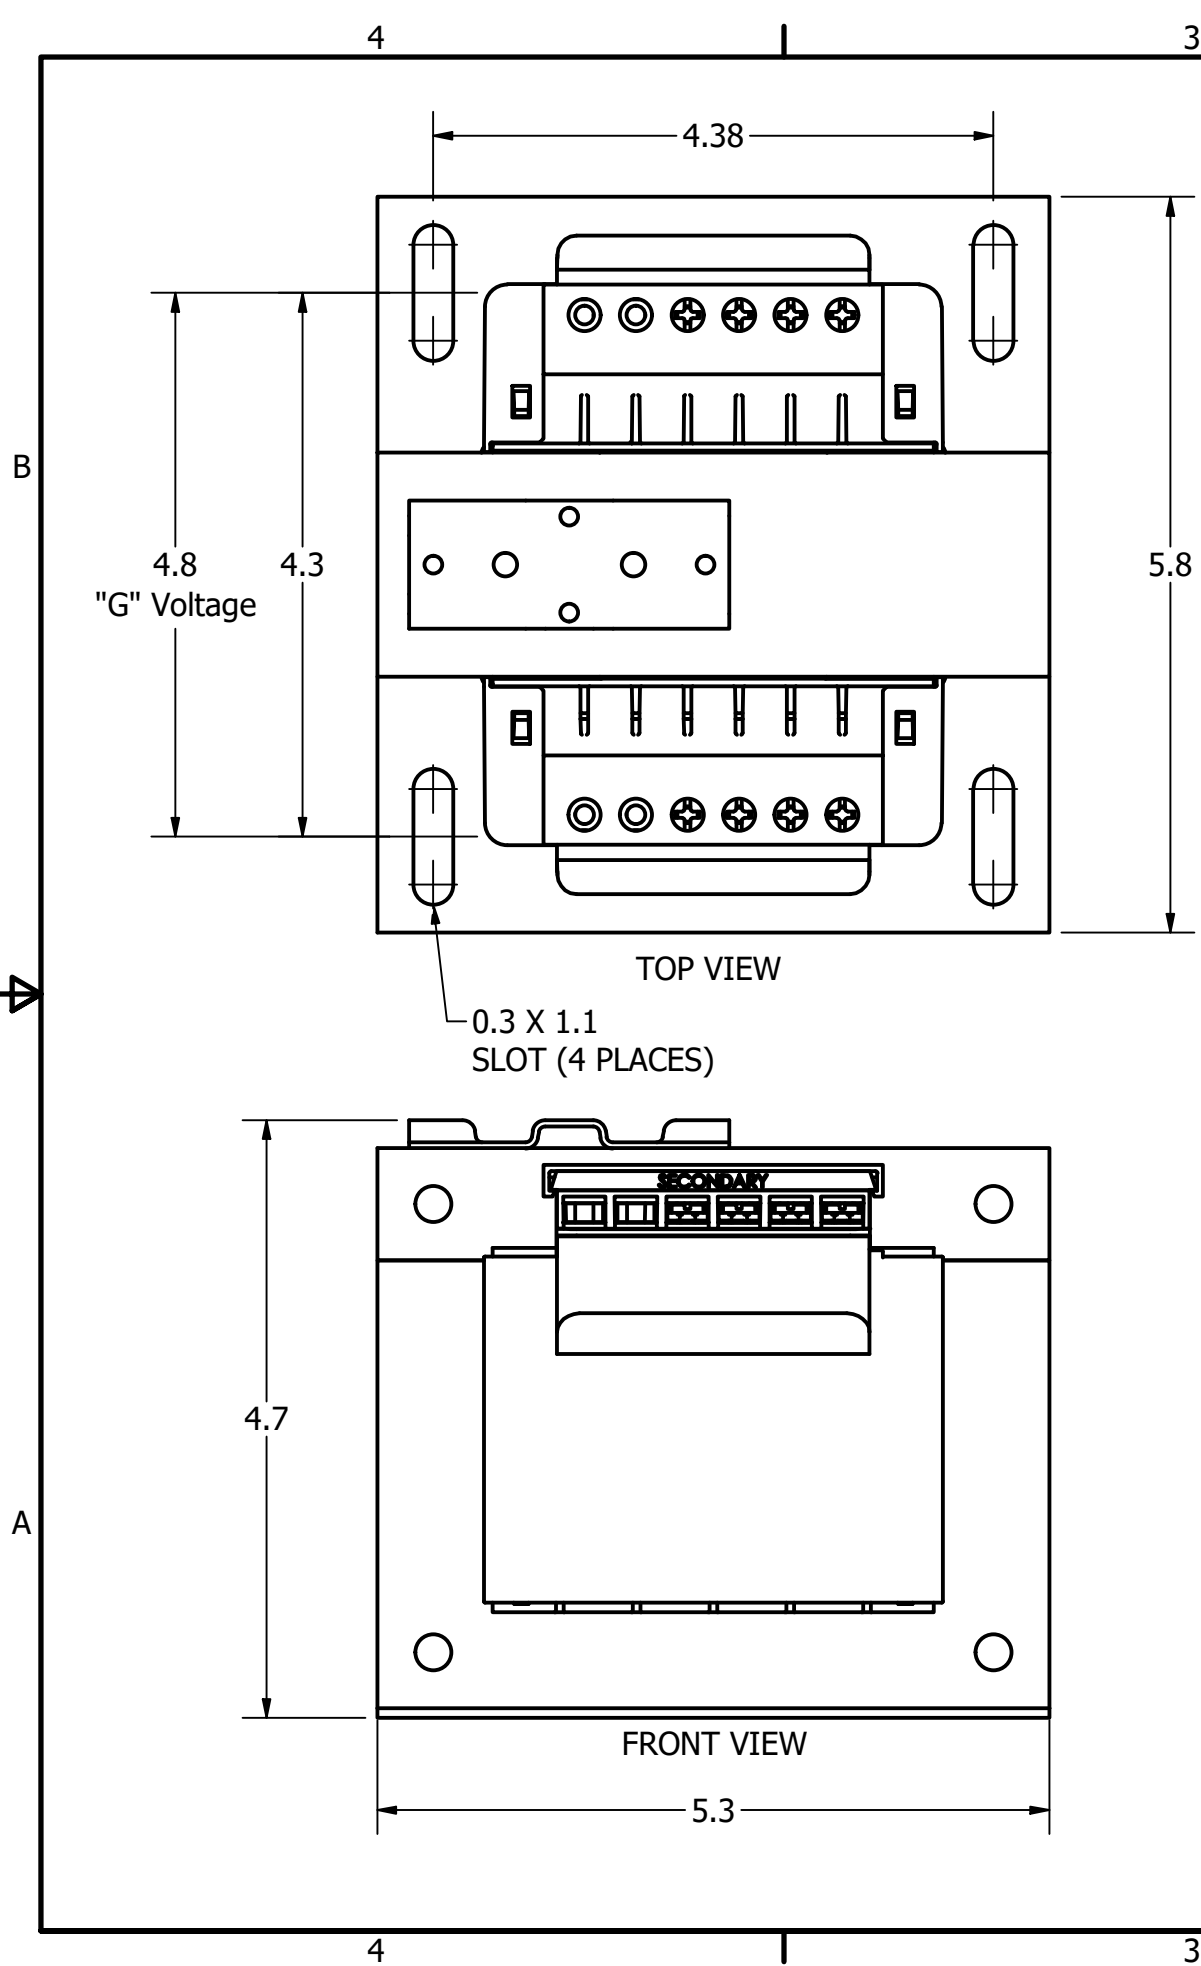

Voltage Group	Part Number	Description
A	BB500DMF	CPT, CTL XFMR, 500VA, 220x440, 230x460, 240x480:110,115,120
B	BB500BSF	CPT, CTL XFMR, 500VA, 240x480 : 24
C	BB500ASF	CPT, CTL XFMR, 500VA, 120x240:24
E	BB500EMF	CPT, CTL XFMR, 500VA, 550/575/600:110,115,120
F	BB500WQF	CPT, CTL XFMR, 500VA, 208/277:120
G	BB500CMF	CPT, CTL XFMR, 500VA, 200/220/440, 208/230/460, 240/480:110,115,120
I	BB500ZPF	CPT, CTL XFMR, 500VA,380/400/415:110/220
J	BB350CLF	CPT, CTL XFMR, 350VA,200/220/440,208/230/460,240/480:23/110,24/115,25/120
K	BB500BAF	CPT, CTL XFMR, 500VA,240x480:120x240

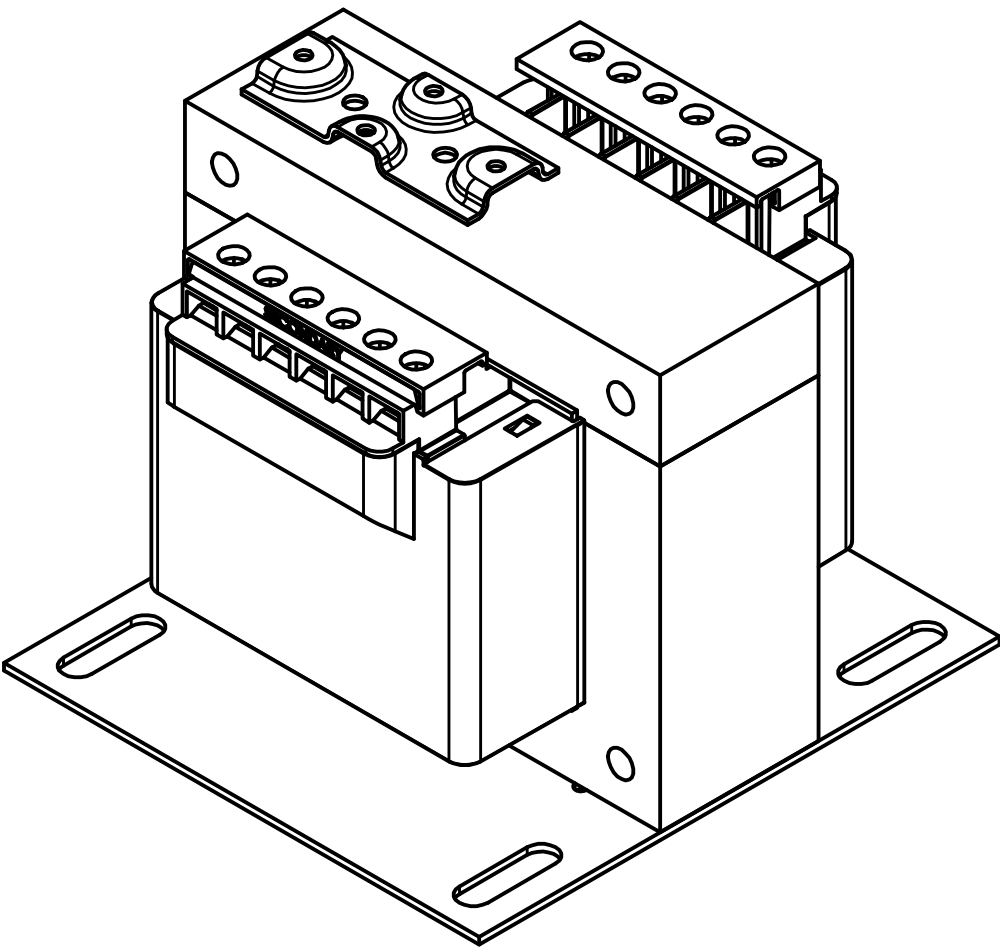

General Spcifications	
Rated V.A.	500
Rated Frequency	50/60
Insulation Class	Class 130°C (266°F) Insulation System 80°C (176°F)
Agency Approvals	UL,CUL
Estimated Weight (lbs.)	15.8

Note: For Connection Diagram Please See Catalog 33563

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.						DRN. BY		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
							EJB		
TOLERANCES (EXCEPT AS NOTED)							DATE:	05/08/26	
DECIMAL									
.XX ± .03									
.XXX ± .010									
FRACTIONAL									
± 1/32		A		Release		05/08/26	EJB		
ANGULAR									
± 1°		NO	ECO	REVISION		DATE	BY	SCALE:	DRN. NO.
							1:1.5	109949	B SHT.1 OF 1