


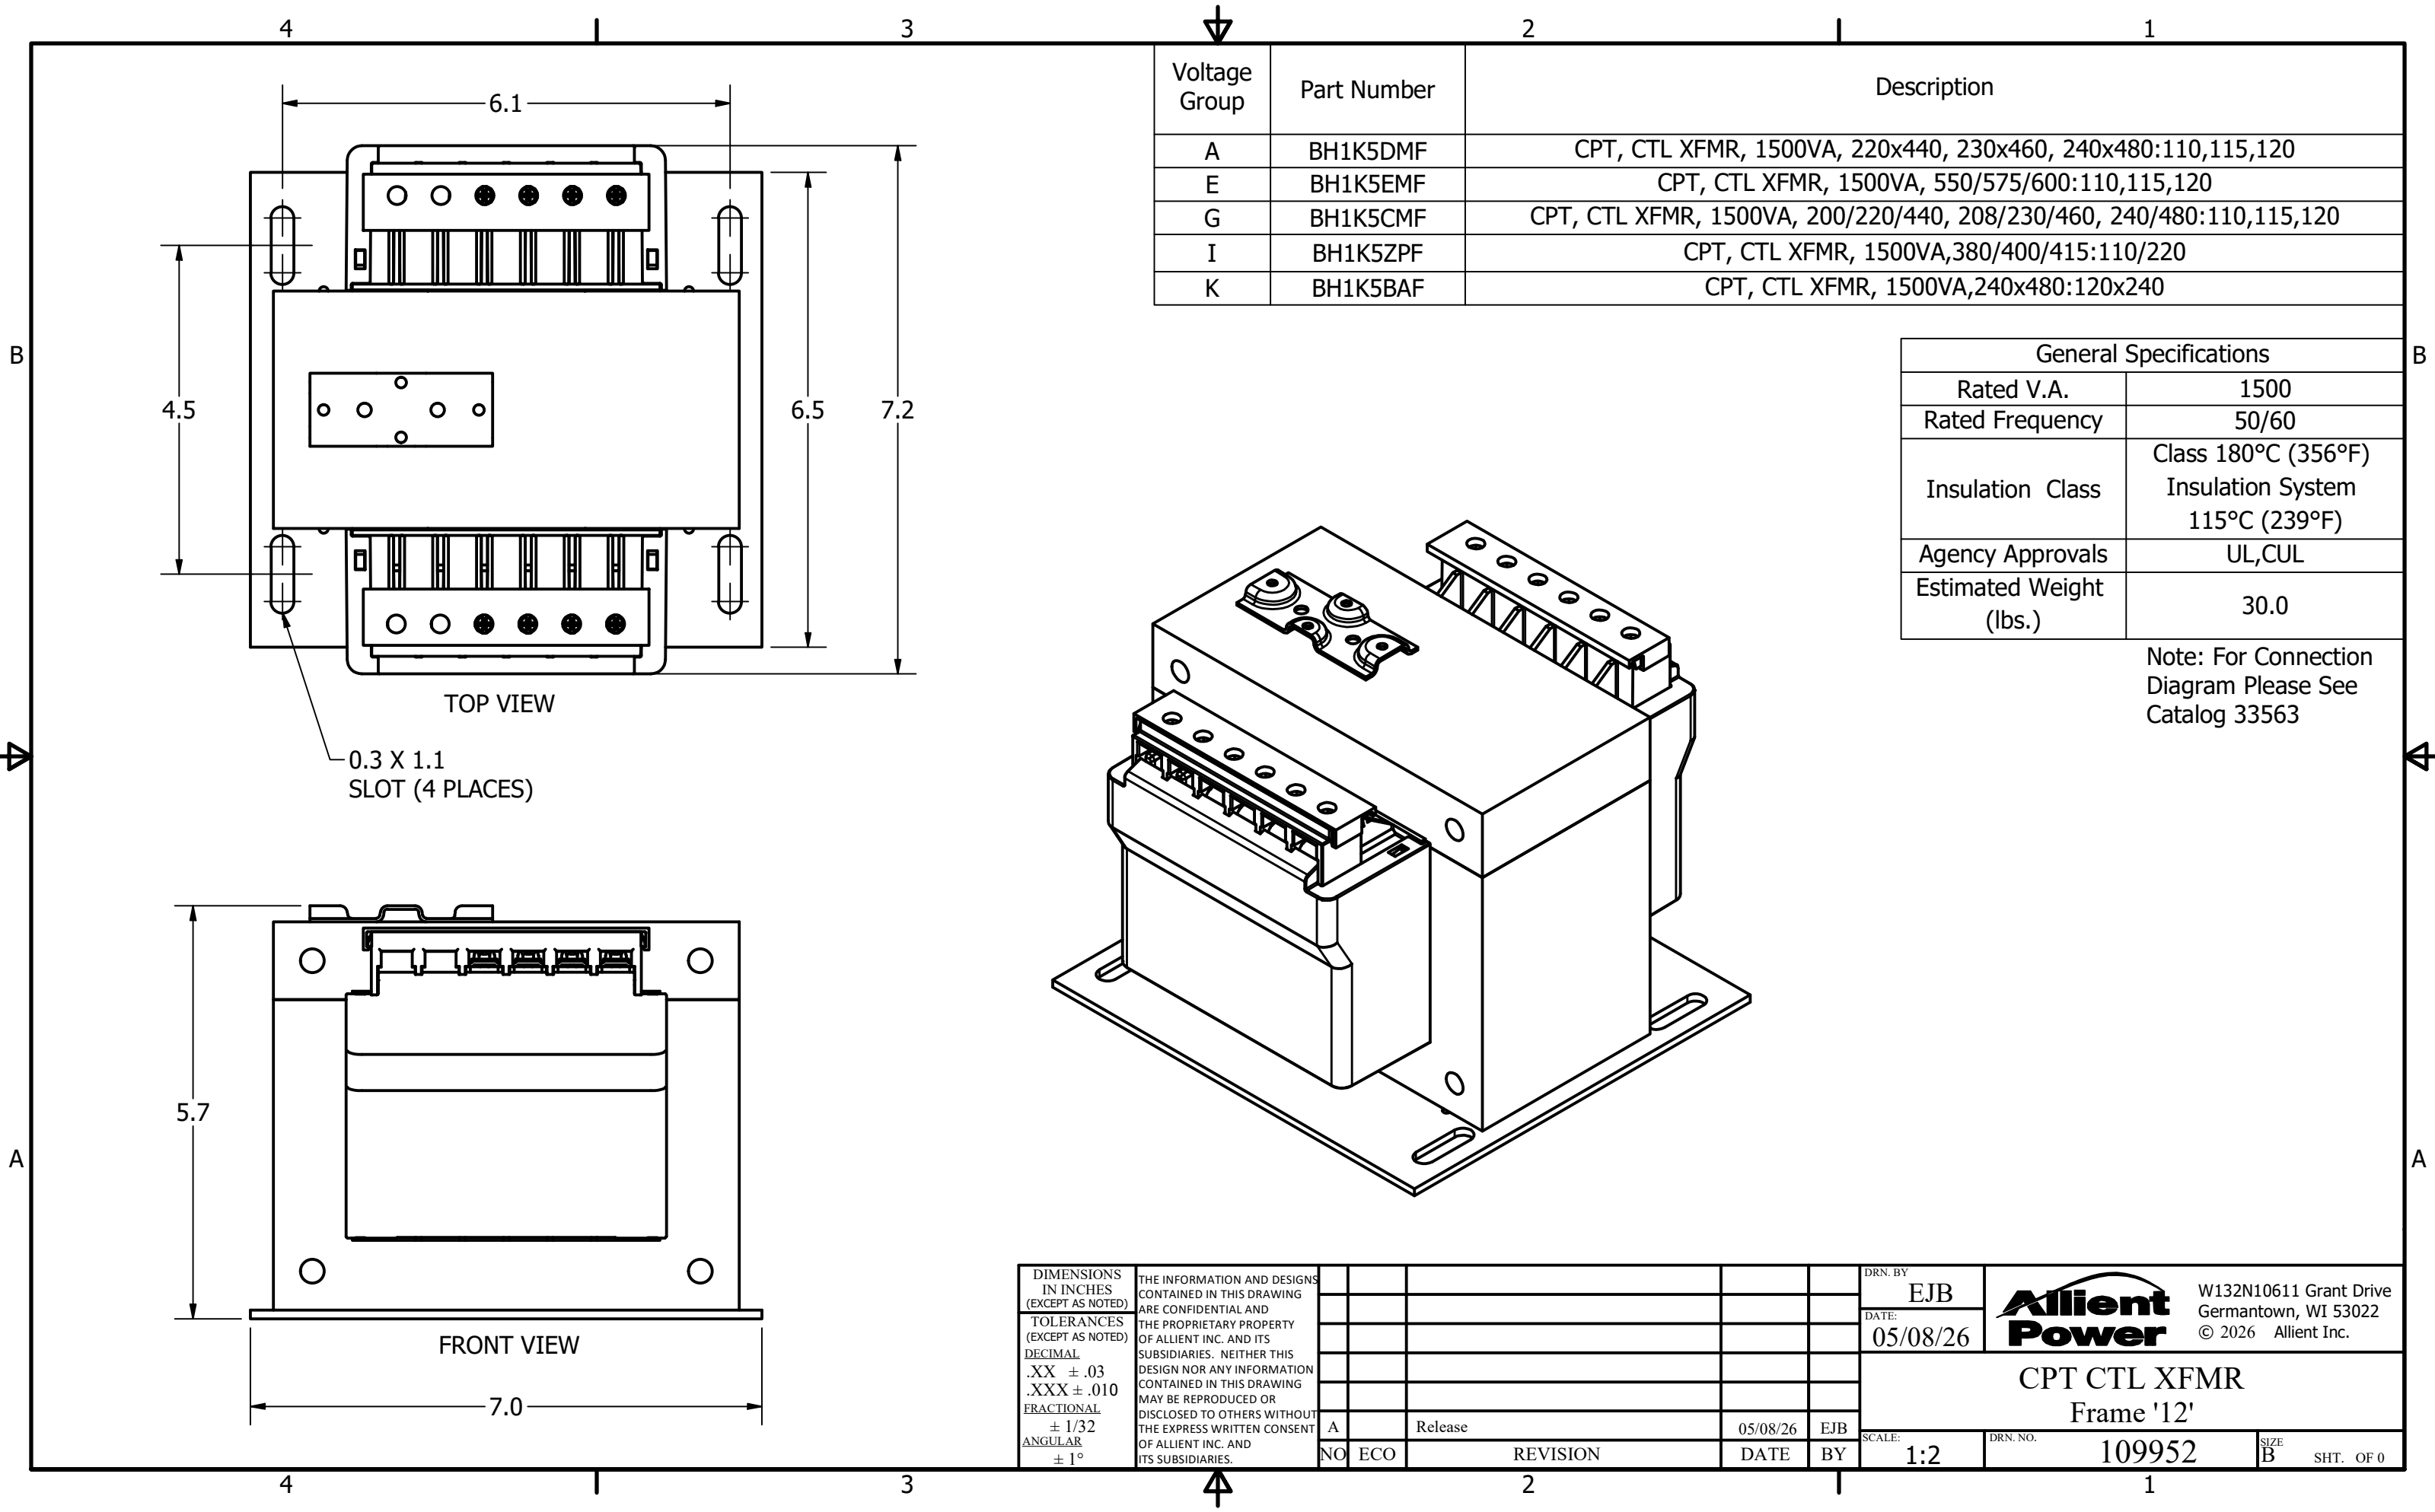

Voltage Group	Part Number	Description
A	BH1K5DMF	CPT, CTL XFMR, 1500VA, 220x440, 230x460, 240x480:110,115,120
E	BH1K5EMF	CPT, CTL XFMR, 1500VA, 550/575/600:110,115,120
G	BH1K5CMF	CPT, CTL XFMR, 1500VA, 200/220/440, 208/230/460, 240/480:110,115,120
I	BH1K5ZPF	CPT, CTL XFMR, 1500VA,380/400/415:110/220
K	BH1K5BAF	CPT, CTL XFMR, 1500VA,240x480:120x240

General Specifications	
Rated V.A.	1500
Rated Frequency	50/60
Insulation Class	Class 180°C (356°F) Insulation System 115°C (239°F)
Agency Approvals	UL,CUL
Estimated Weight (lbs.)	30.0

Note: For Connection
Diagram Please See
Catalog 33563

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.						DRN. BY EJB		W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.		
							DATE: 05/08/26				
		TOLERANCES (EXCEPT AS NOTED) DECIMAL .XX ± .03 .XXX ± .010 FRACTIONAL ± 1/32 ANGULAR ± 1°							CPT CTL XFMR Frame '12'		
			A		Release		05/08/26	EJB	SCALE: 1:2	DRN. NO. 109952	SIZE B SHT. OF 0
			NO	ECO	REVISION		DATE	BY			