


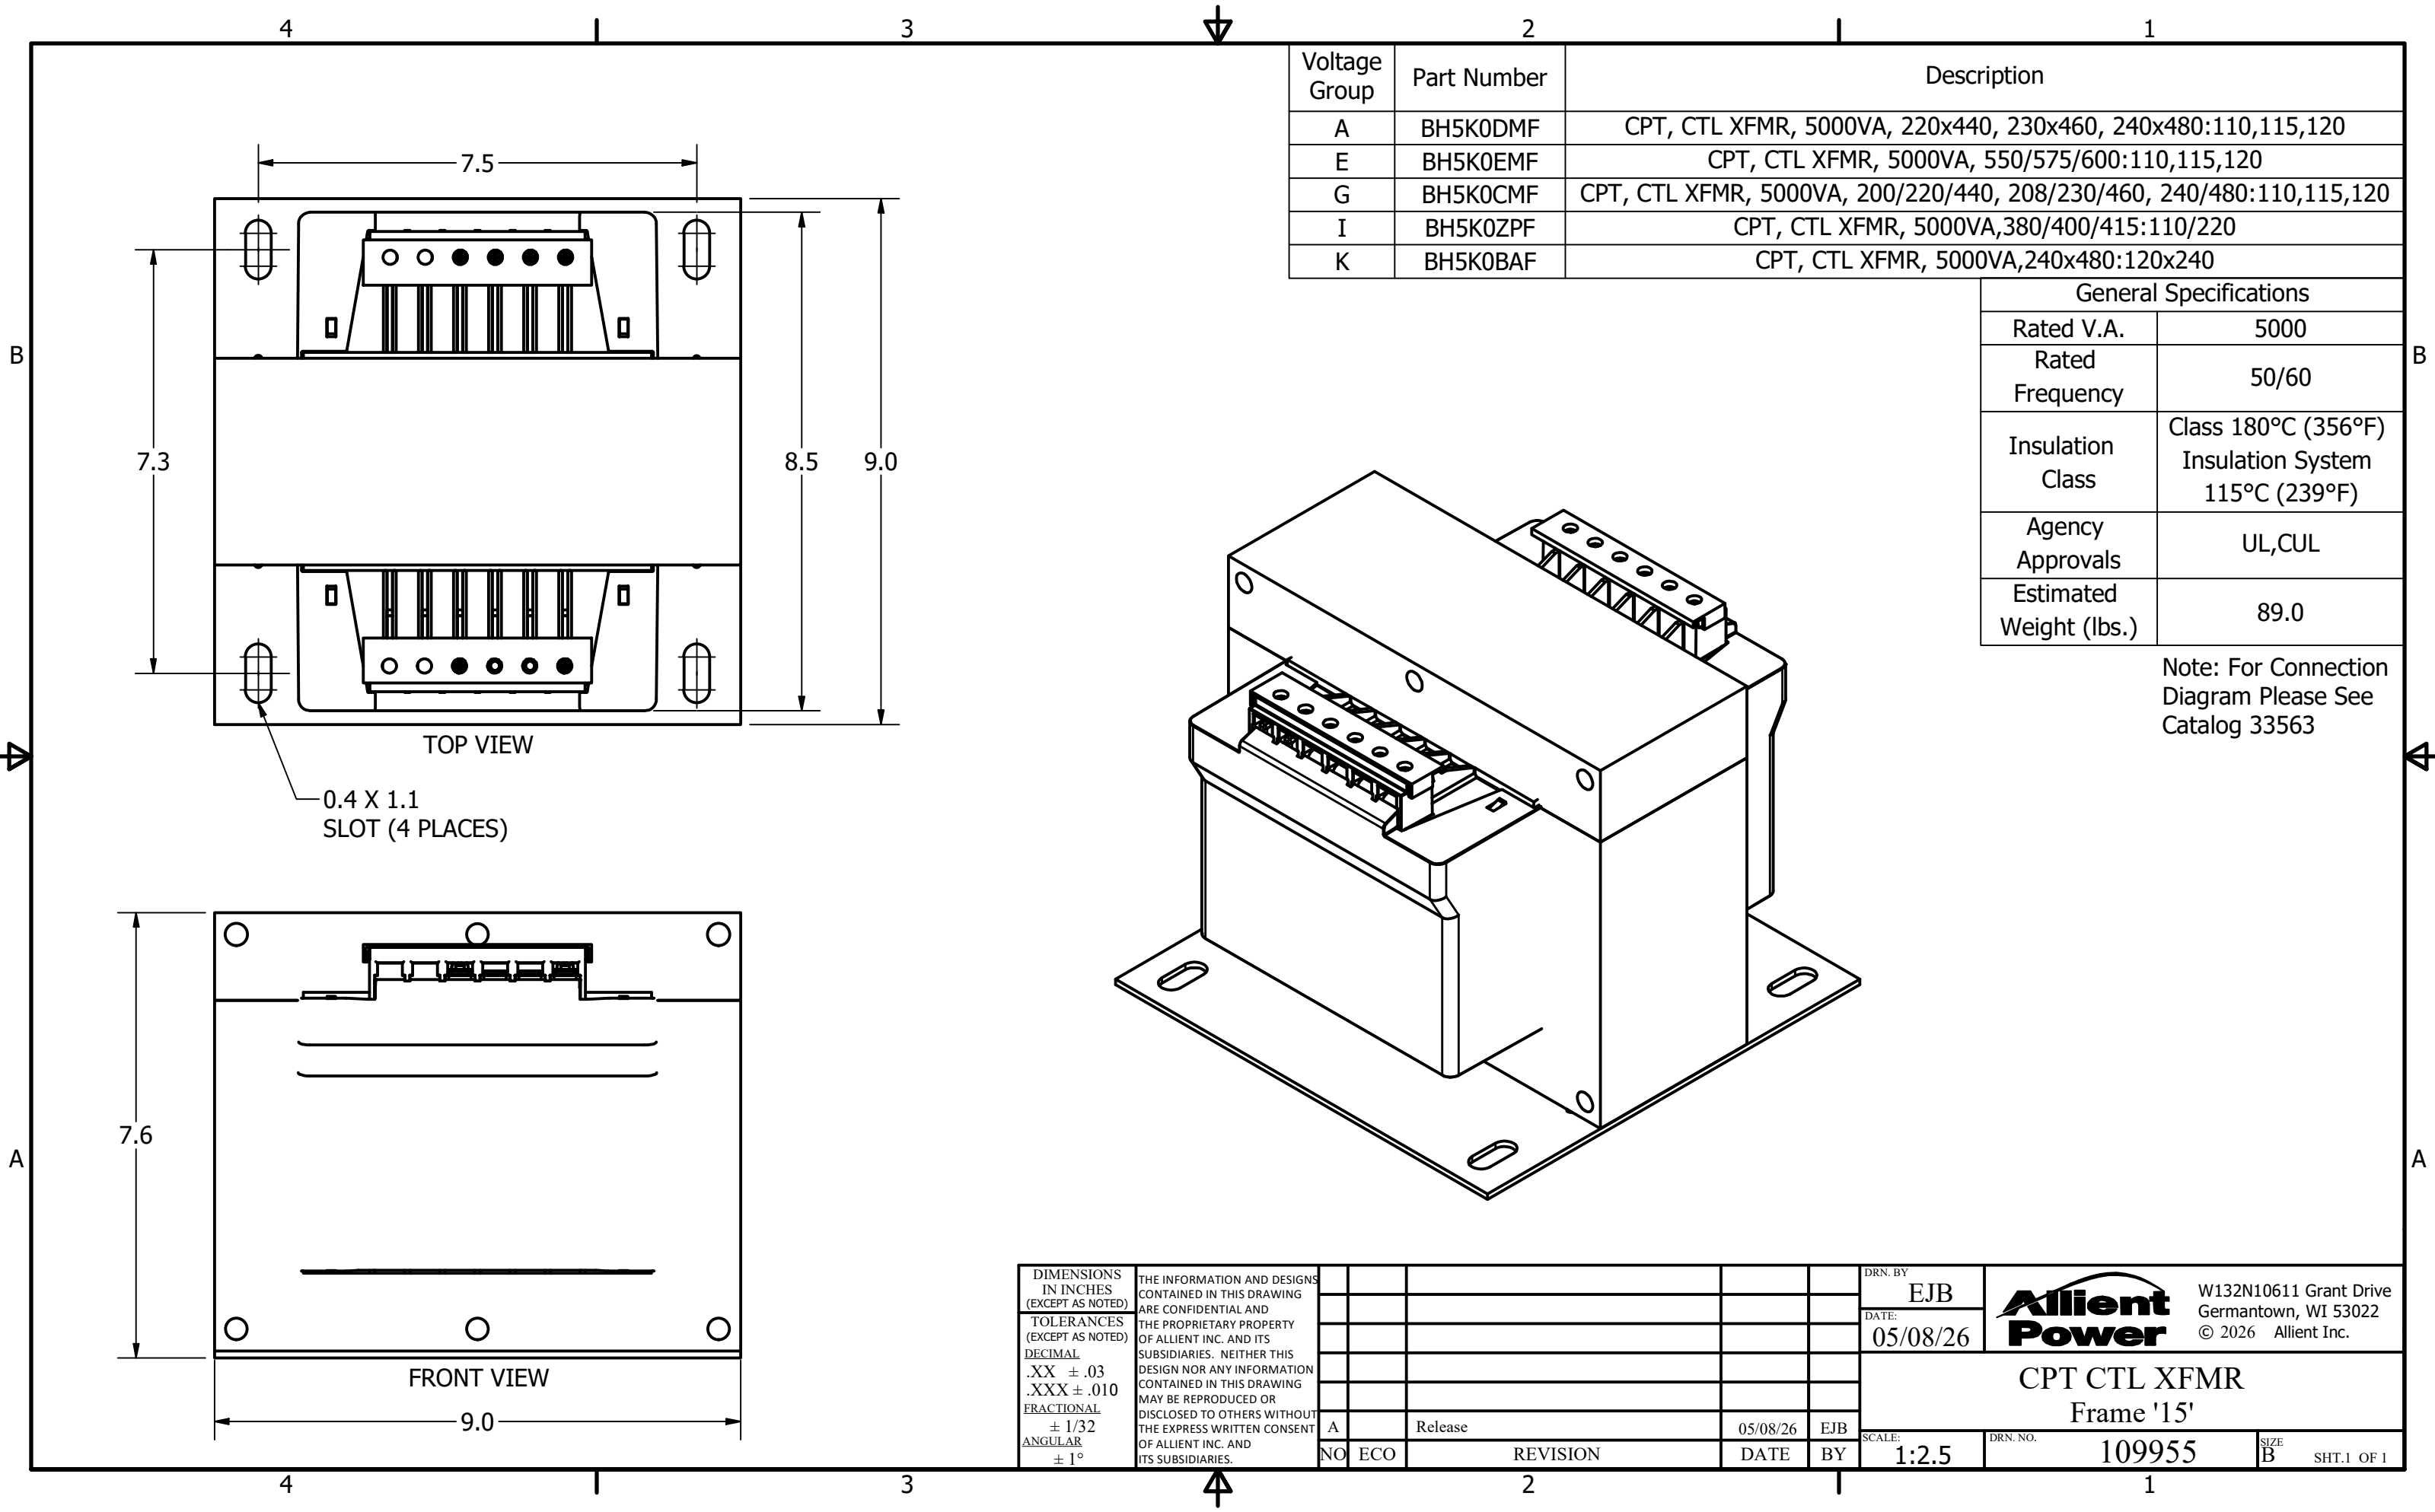

Voltage Group	Part Number	Description
A	BH5K0DMF	CPT, CTL XFMR, 5000VA, 220x440, 230x460, 240x480:110,115,120
E	BH5K0EMF	CPT, CTL XFMR, 5000VA, 550/575/600:110,115,120
G	BH5K0CMF	CPT, CTL XFMR, 5000VA, 200/220/440, 208/230/460, 240/480:110,115,120
I	BH5K0ZPF	CPT, CTL XFMR, 5000VA,380/400/415:110/220
K	BH5K0BAF	CPT, CTL XFMR, 5000VA,240x480:120x240

General Specifications	
Rated V.A.	5000
Rated Frequency	50/60
Insulation Class	Class 180°C (356°F) Insulation System 115°C (239°F)
Agency Approvals	UL,CUL
Estimated Weight (lbs.)	89.0

Note: For Connection Diagram Please See Catalog 33563

DIMENSIONS IN INCHES (EXCEPT AS NOTED)	THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIENT INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIENT INC. AND ITS SUBSIDIARIES.						DRN. BY EJB	 W132N10611 Grant Drive Germantown, WI 53022 © 2026 Allient Inc.
							DATE: 05/08/26	
TOLERANCES (EXCEPT AS NOTED)								
DECIMAL								
.XX ± .03								
.XXX ± .010								
FRACTIONAL								
± 1/32								
ANGULAR		A	Release		05/08/26	EJB		
± 1°		NO	ECO	REVISION	DATE	BY	SCALE: 1:2.5	DRN. NO. 109955
								SIZE B SHT.1 OF 1