


V1K SCHEMATIC



NOTES:

1. PREINSTALLED LEAD LENGTH: 30 IN
2. MINIMUM MOUNTING SPACER LENGTH (WITHOUT INSULATION): 0.50 IN
3. MAXIMUM SPACER AND HARDWARE DIAMETER: 0.375 IN
4. KEEP WALLS AND OTHER COMPONENTS AT LEAST 0.50 IN FROM EDGES OF BOARD.
5. KEEP ALL COMPONENTS 1" AWAY FROM V1K BOARD RESISTORS
6. RESISTOR BODIES ARE HOT, ROUTE WIRES AWAY FROM RESISTORS
7. PREFERRED ORIENTATION: BOARD SHOULD NOT BE ORIENTED SO CAPACITORS ARE ABOVE RESISTORS
8. POWER DISSIPATION: 85 W (est.)

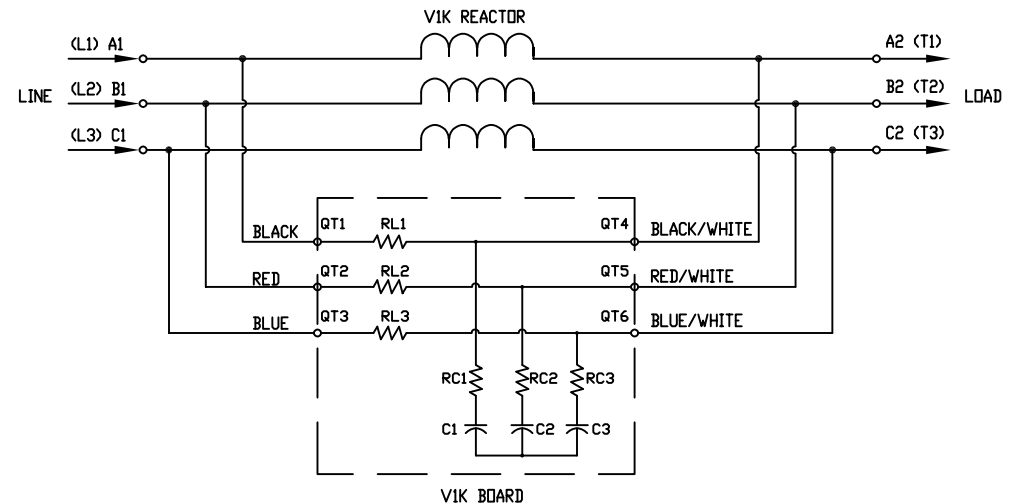