
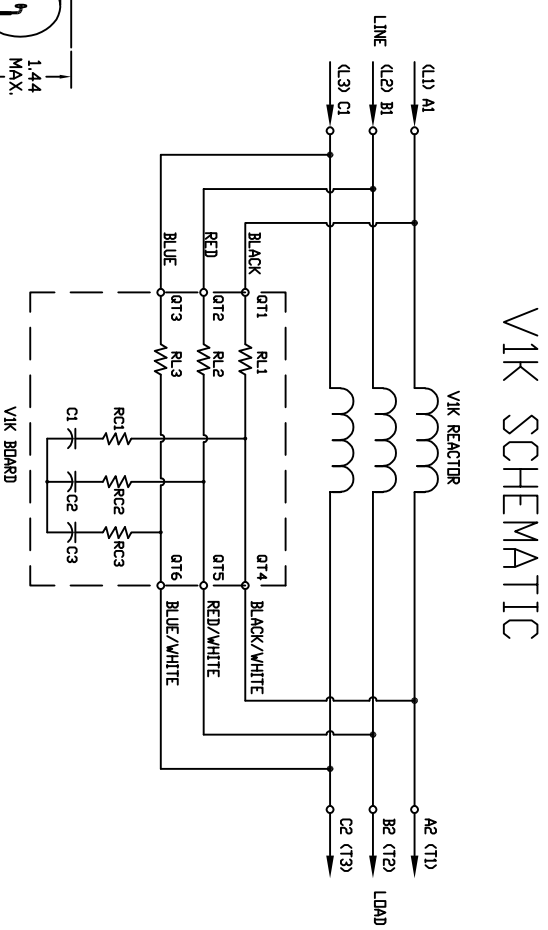
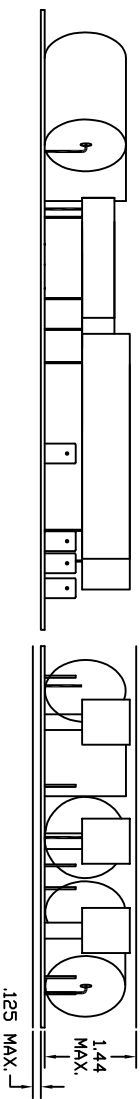


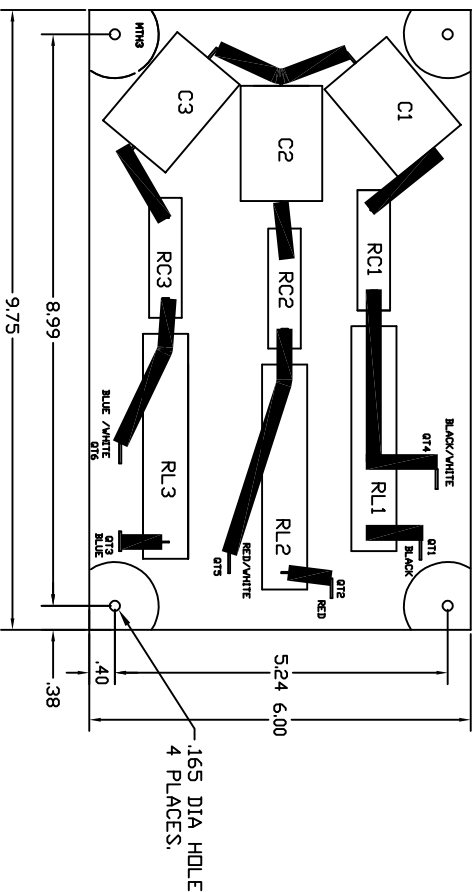

- NOTES:
1. PREINSTALLED LEAD LENGTH: 30 IN
 2. MINIMUM MOUNTING SPACER LENGTH (WITHOUT INSULATION): 0.50 IN
 3. MAXIMUM SPACER AND HARDWARE DIAMETER: 0.375 IN
 4. KEEP WALLS AND OTHER COMPONENTS AT LEAST 0.50 IN FROM EDGES OF BOARD.
 5. RESISTOR BODIES ARE HOT, ROUTE WIRES AWAY FROM RESISTORS
 6. KEEP ALL COMPONENTS 1" AWAY FROM VIK BOARD RESISTORS
 7. PREFERRED ORIENTATION: BOARD SHOULD NOT BE ORIENTED SO CAPACITORS ARE ABOVE RESISTORS
 8. POWER DISSIPATION: 85 W (est.)

PREFERRED ORIENTATION			ACCEPTABLE ORIENTATION			PROHIBITED ORIENTATION		
UP			UP			UP		