Capacitor, 5kVar, 480V, 60Hz
Oil Version, Spring Clamp, Vishay.
3 x 19.2uF Delta Connection

Approx Weight: 1.76 LBS

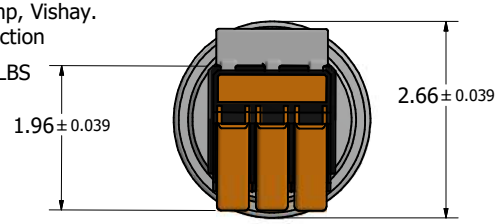

Warning: Bleeder Resistor Must Be Installed In Every Capacitor
Capacitor Voltage Will Not Discharge After Switching Power Off Without Bleeder Resistor Installed.

Press Orange Plate Marked "PUSH" To Insert Resistor Leads Into Capacitor Terminal Block.
Body Of Resistor Will Be Flush With Terminal Block.

Wire Range: 14 AWG To 4 AWG
Strip Length: 0.71 IN.
Wire Insulation Insertion Depth: 0.315 IN.
Maximum Ferrule Dimensions: Rectangular 0.299 IN Wide By 0.236 IN Thick, Long Dimension Horizontal.

Open Lever to Insert Wire
Release or Close Lever After Wire Is Inserted to Clamp Wire
Lever Is Designed for at Least 10 Operating Cycles.
Continuous Use Can Result in Excessive Wear.

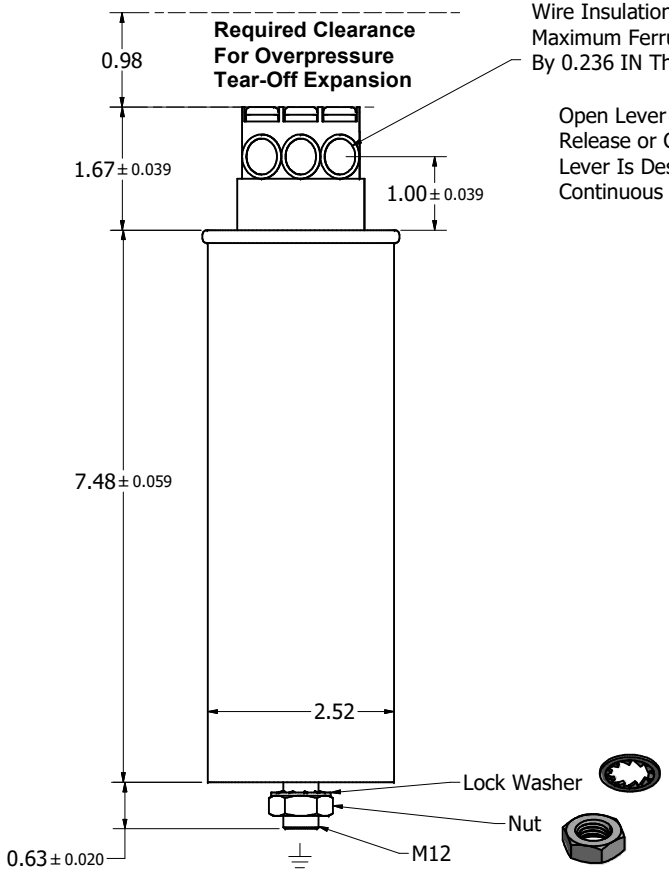

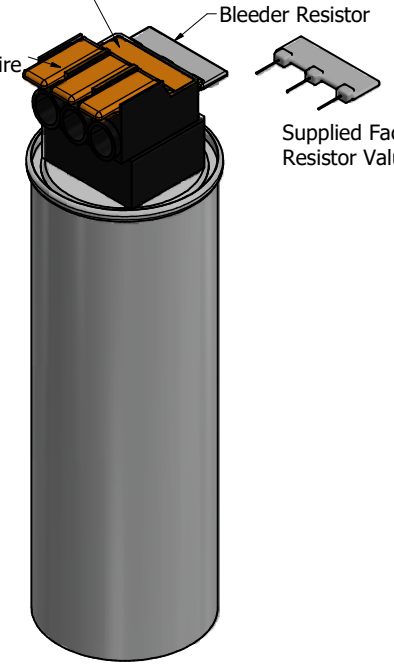

Supplied Factory Bleeder Resistor Value, 615k



Warning

After switching off the power, always allow 5 minutes for the capacitors in the filter and in the drive to discharge before working on the filter, the drive, the motor, or the connecting wiring. It is a good idea to check with a voltmeter to make sure that all sources of power have been disconnected and that all capacitors have discharged before beginning work.

Material(s) Shall be RoHS Compliant
Material(s) shall meet REACH requirements

NO	REVISION	DATE	BY
A	As Drawn	5/16/2022	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ± .06
.XXX ± .03
FRACTIONAL
± 1/32
ANGULAR
± 1°

TCI An Allied Motion Company
W132N10611 Grant Drive
Germantown, WI 53022

Cap, 5kVar, 480V, 60Hz
Oil, Spring Clamp, Vishay.

DRN. BY: DSW | DATE: 5/16/2022 | 32447
SCALE: 1:1.3 | APRVD: | SIZE: C
SHT 1 OF 1