


SEE 26824 FOR SCHEMATIC

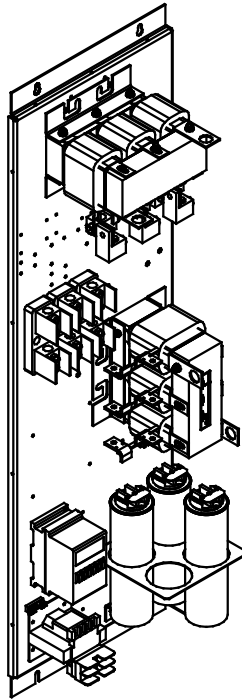

CUSTOMER CONNECTION OUTPUT:
 WIRE RANGE—ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.


GROUND LUG:
 WIRE RANGE—ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

UNIT SPECIFICATIONS:				
KVAR	HARMONIC	VOLT	HZ	PHASE HP
30	5TH	240	60	3 100
ENCLOSURE	WHITE OPEN PANEL			
FEATURES	WITH CONTACTOR			
APPROX.WT. LBS.	210			

SYMBOL	TCI PART NUMBER
LR	KDRJ21T
TR	KTR30B65HG
CAP1, 2, 3 (10 KVAR)	KCAP10B6B
XFMR.	23894
Fu1a,2a,3a	11171
Fu4,6	23951
Fu5	13362
CNT	19246

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

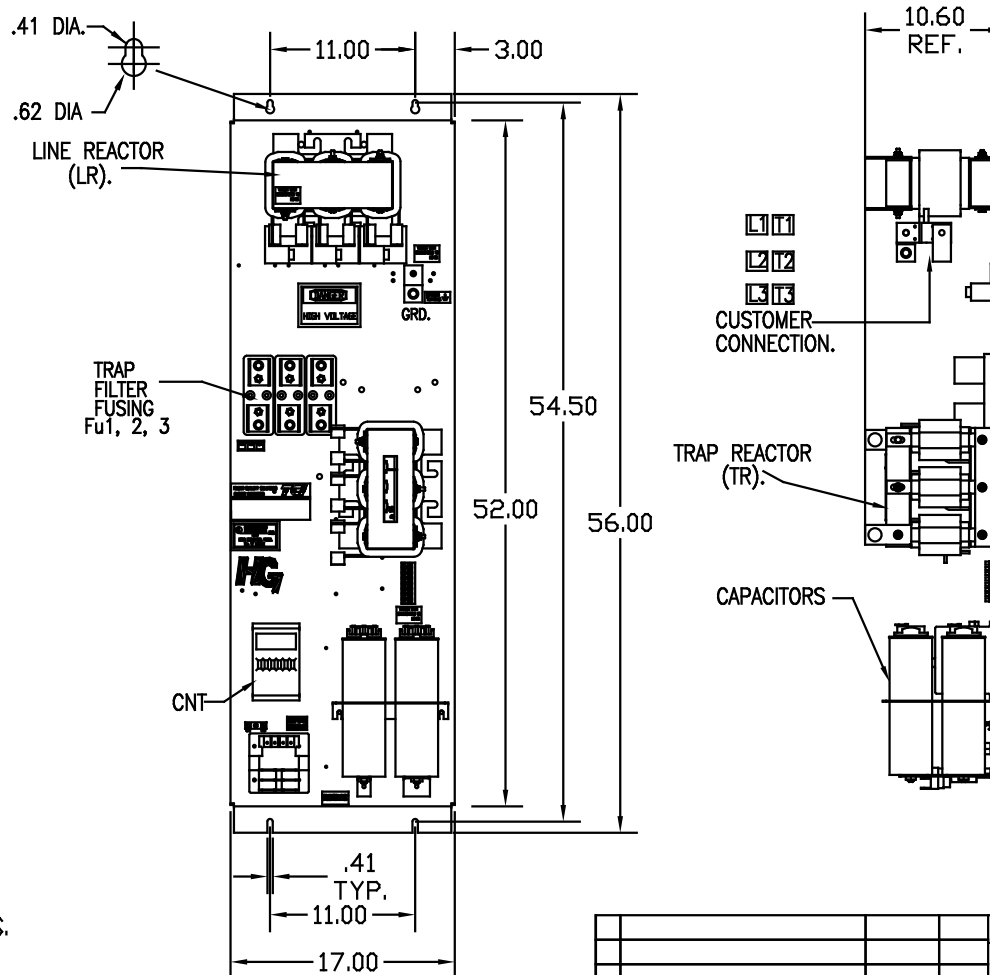

				TOLERANCES EXCEPT AS NOTED:		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				XX ±.03			
				.XXX±.01			
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1/2°			
NO	REVISION	DATE	BY	SCALE	DSW	DATE 10/10/08	ENG. NO. 103609DG
				TO SCALE			SHT. 1 OF 1