
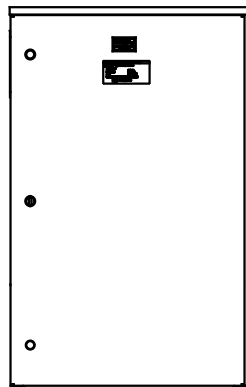


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
30	5TH	240	60	3	100
ENCLOSURE		TYPE 3R- COLOR, WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS		367			



SEE DWG# 26900 FOR SCHEMATIC
CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

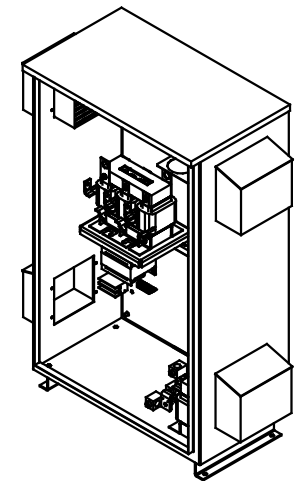


INSIDE VIEW
OF DOOR

SIDE VIEW

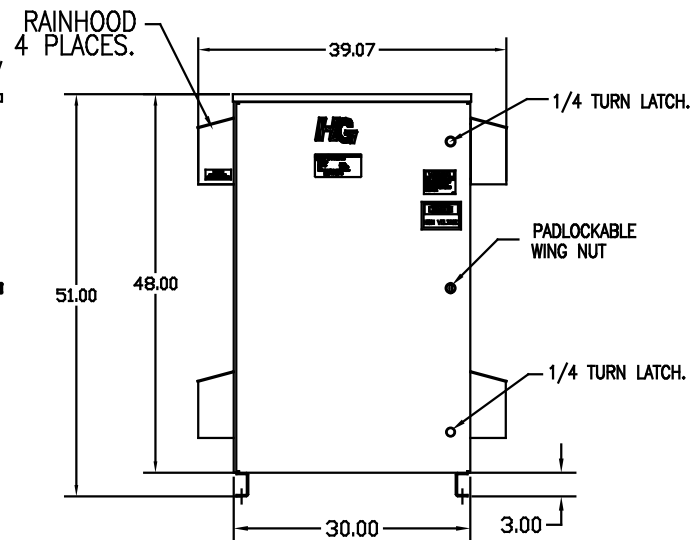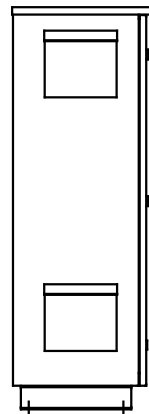


FRONT VIEW
WITH DOOR

.50 DIA HOLES
4 PLACES.

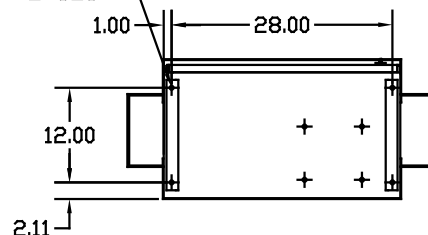


FRONT VIEW
WITHOUT DOOR

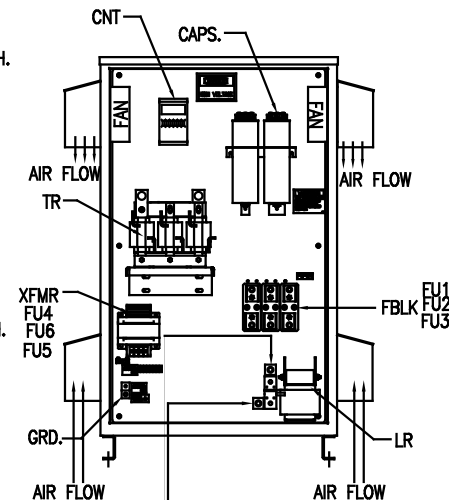

L1 L2 L3 T1 T2 T3

SUGGESTED CUSTOMER WIRE ENTRY
AND EXIT LOCATION

GROUND LUG:
WIRE RANGE- ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN.-LB.

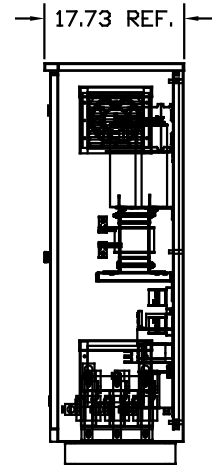

SIDE VIEW

CUSTOMER CONNECTIONS
WIRE RANGE- ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN.-LB.

SYMBOL	TCI PART NUMBER
LR	KDRJ22T
TR	KTR30B65HG
CAP (10 KVAR) , 3 PLACES	KCAP10B6B
XFMR.	23899
Fu1,2,3	11305
Fu4,6	14106
Fu5	23977
CNT	19246

						TOLERANCES EXCEPT AS NOTED		 7878 N. 86th STREET MILWAUKEE, WI 53224	
						XX ±.12		HG100BW03STC, 100HP 240/3/60 UL TYPE 3R	
						.XXX±.06			
						FRACTIONAL ± 1/32		DWG. NO. 103719DG SHT. 1 OF 1	
						ANGULAR ± 1/2°			
NO	REVISION	DATE	BY			SCALE	DSW TO FIT	DATE 12/22/08	C