

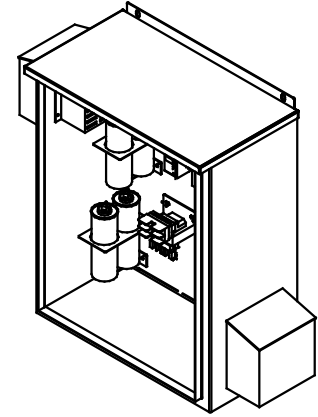



SEE DWG# 26899 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.



NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

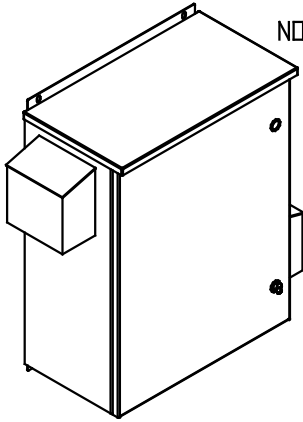


INSIDE VIEW  
OF DOOR

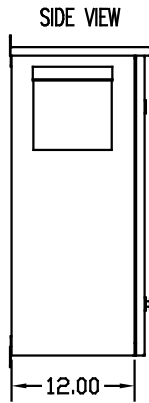

SIDE VIEW

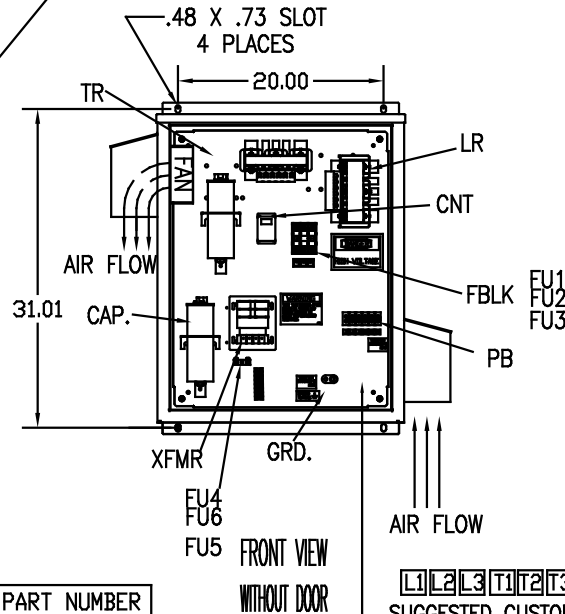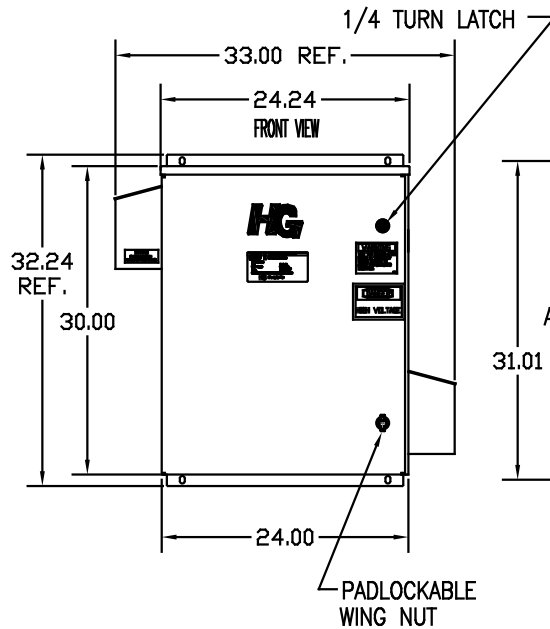

FRONT VIEW  
WITHOUT DOOR



UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
3	5TH	240	60	3	10
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS.		131			

SYMBOL	TCI PART NUMBER
LR	KDRE21T
TR	KTR3B65HG
CAP. (3 KVAR)	KCAP3A6A
XFMR.	23896
Fu1, 2, 3	15752
Fu4,6	14106
Fu5	17567
CNT	26739

PB—POWER INPUT BLOCK:  
WIRE RANGE—#18 TO #4 AWG.  
TIGHTENING TORQUE 20 IN—LB.

GROUND LUG:  
WIRE RANGE—1/0 TO #14 AWG.  
TIGHTENING TORQUE 200 IN—LB.

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED	SCALE
				DECIMAL XX ±.12 .XXX±.06 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	TO FIT

**TCI** 7878 N. 86th STREET  
MILWAUKEE, WI 53224

HG10BW03STC, 10HP  
240/3/60 UL TYPE 3R

DRW BY DSW DATE 12/22/08 DWG. NO. 103710DG  
SCALE TO FIT