







UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
40	5TH	600	60	3	125
ENCLOSURE	TYPE 3R- COLOR, WHITE				
FEATURES	CONTACTOR				
APPROX.WT. LBS	291				

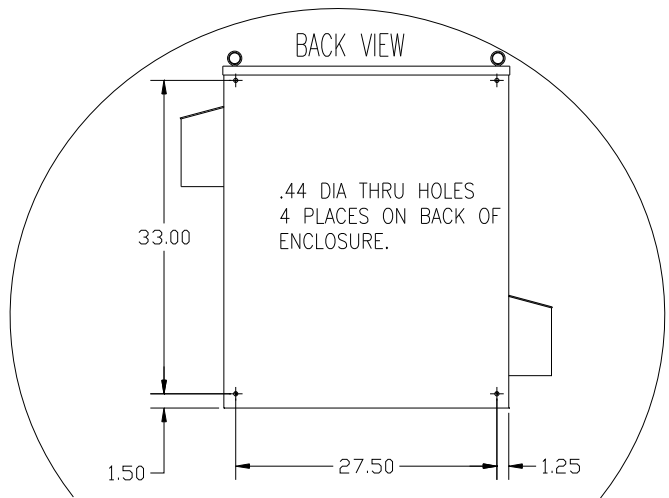

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26972-1 FOR SCHEMATIC

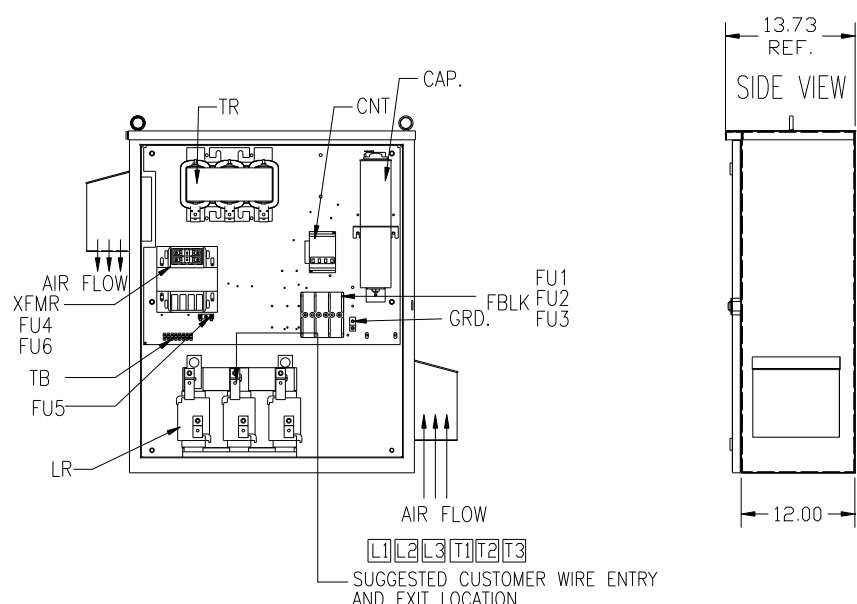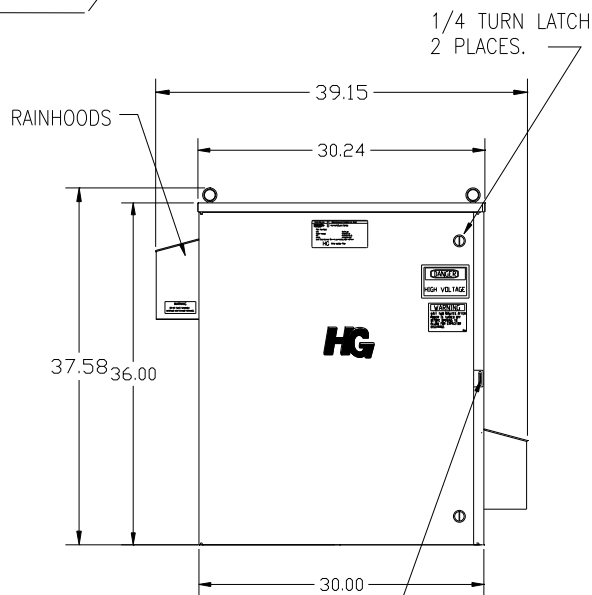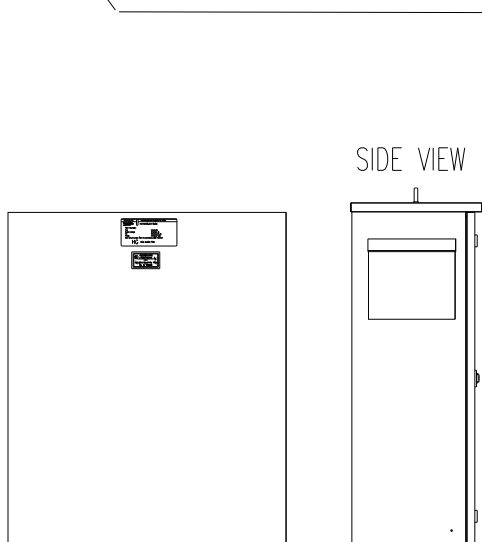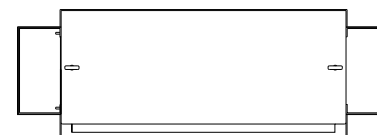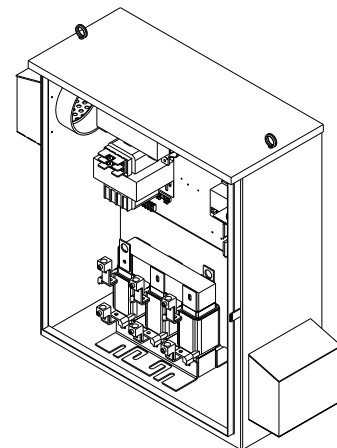

HG125CW03STC	
COMPONENTS	
LINE REACTOR	X
LR	
TRAP REACTOR	X
TR	
CAPACITOR	X
CAP	
TRAP FUSING	X
FU1,2,3	
XFMR	X
XFMR	X
FU4,6	
XFMR	X
FU5	
CNT	X

GROUND LUG:  
 WIRE RANGE- 250MCM-6  
 TIGHTENING TORQUE 275 IN-LB.

CUSTOMER CONNECTIONS  
 WIRE RANGE- 250MCM-6  
 TIGHTENING TORQUE 275 IN-LB.

TOLERANCES (EXCEPT AS NOTED):			
DECIMAL			
			.XX ± .12
			.XXX ± .06
FRACTIONAL			
			± 1/32
ANGULAR			
			± 1/2°

3033 UPDATE LAYOUT	2/24/14	DSW	
2798 ENCLOSURE CHANGE	11/23/11	DSW	
REVISION	DATE	BY	

7878 N. 86th STREET MILWAUKEE, WI 53224	
HG125CW03STC, 125HP 600/3/60 UL TYPE 3R	
DRN BY: DSW	DATE: 02/18/09
SCALE: TO FIT	APRVD: [Signature]
DWG. NO: 103696DG	
SHT. 1 OF 1	