
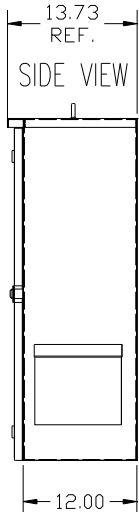
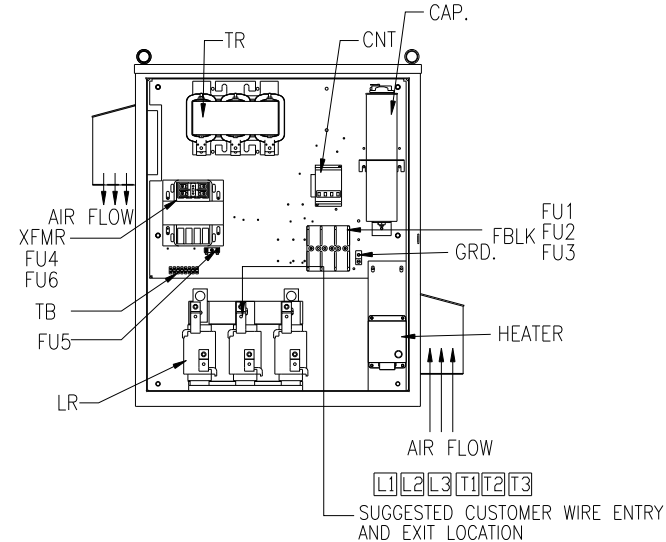
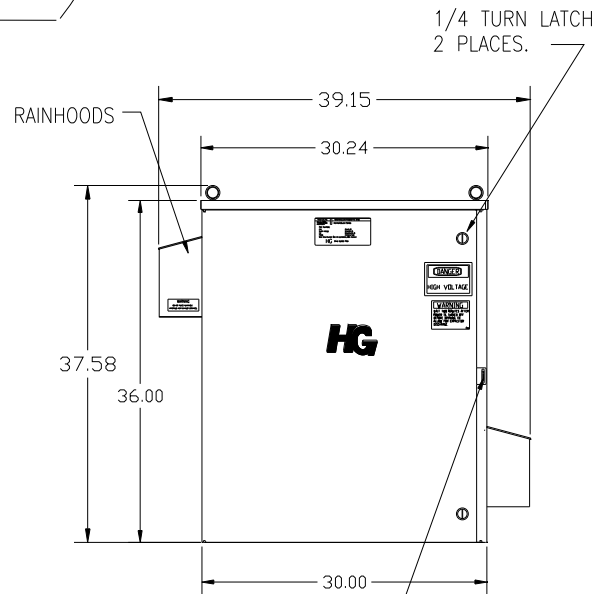
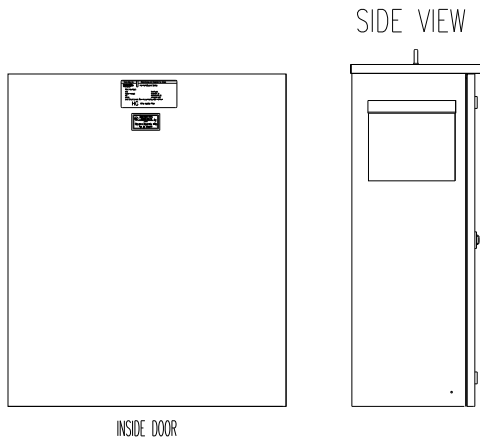
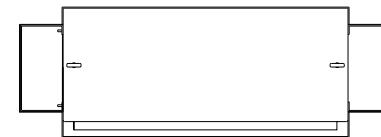


HG125CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITORS CAP	X
TRAP FUSING FU1,2,3	X
TRANSFORMER XFMR.	X
XFMR. FUSING. FU4,6	X
XFMR. FUSING. FU5	X
CONTACTOR CNT	X
HEATER	X

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
40	5TH	600	60	3	125
ENCLOSURE		TYPE 3R- COLOR, WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX.WT. LBS		295			

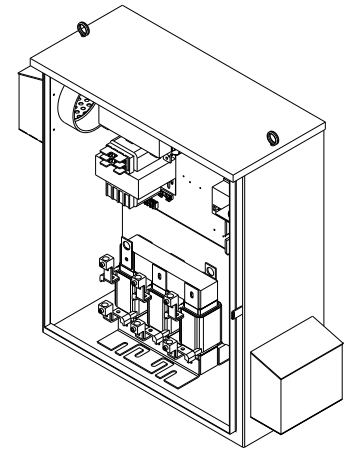

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26972 FOR SCHEMATIC

GROUND LUG:
WIRE RANGE- 250MCM-6
TIGHTENING TORQUE 275 IN-LB.

CUSTOMER CONNECTIONS
WIRE RANGE- 250MCM-6
TIGHTENING TORQUE 275 IN-LB.

				TOLERANCES (EXCEPT AS NOTED):	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ±.12	HG125CW03STCH, 125HP 600/3/60 UL TYPE 3R
				.XXX ±.06	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY	SCALE TO FIT	APRVD.
					DATE 02/18/09
					DWG. NO. 103751DG
					SHT. 1 of 1