


UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
45	5TH	480	60	3	150	
ENCLOSURE		UL TYPE 3R- COLOR, WHITE				
APPROX.WT. LBS		400				


SYMBOL	TCI PART NUMBER
LR	KDRL2T
TR	KTR45A65HGX1
CAP1, 2 (20 KVAR)	27609
CAP3 (5 KVAR)	27606
XFMR.	23899
Fu1,2,3	11077
Fu4,6	14106
Fu5	23977

ALTERNATE	TCI PART NUMBER
CAP1, 2 (20 KVAR)	KCAP20A6B
CAP3 (5 KVAR)	KCAP5A6A

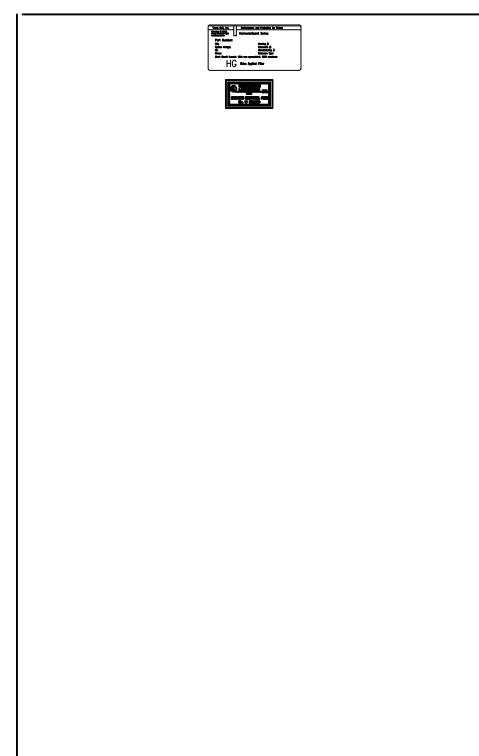


INSIDE DOOR



SIDE VIEW

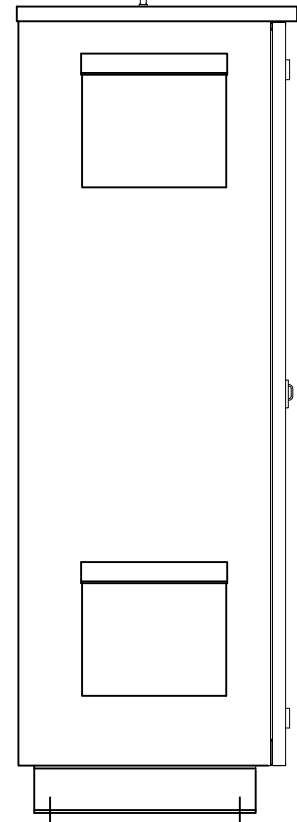

RAINHOOD  
4 PLACES.

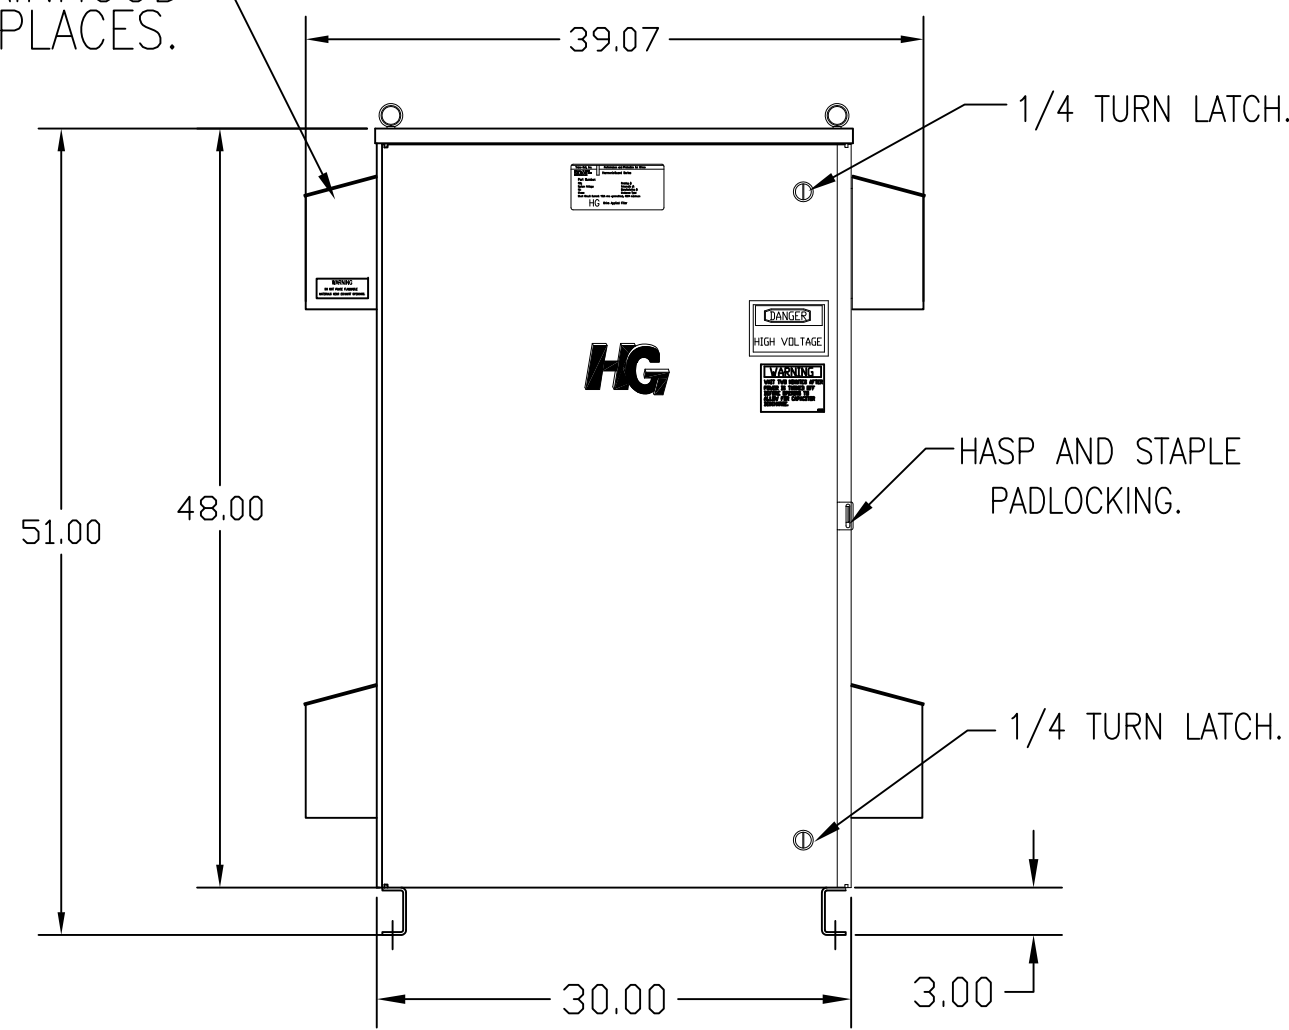



FRONT VIEW  
WITHOUT DOOR

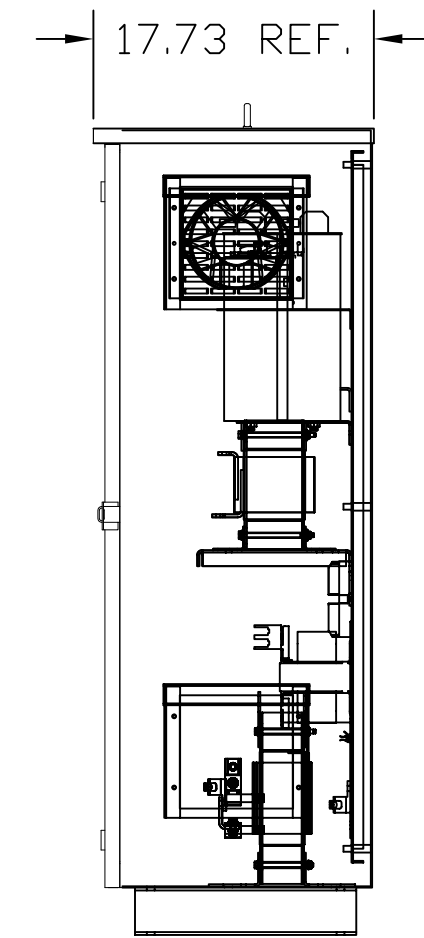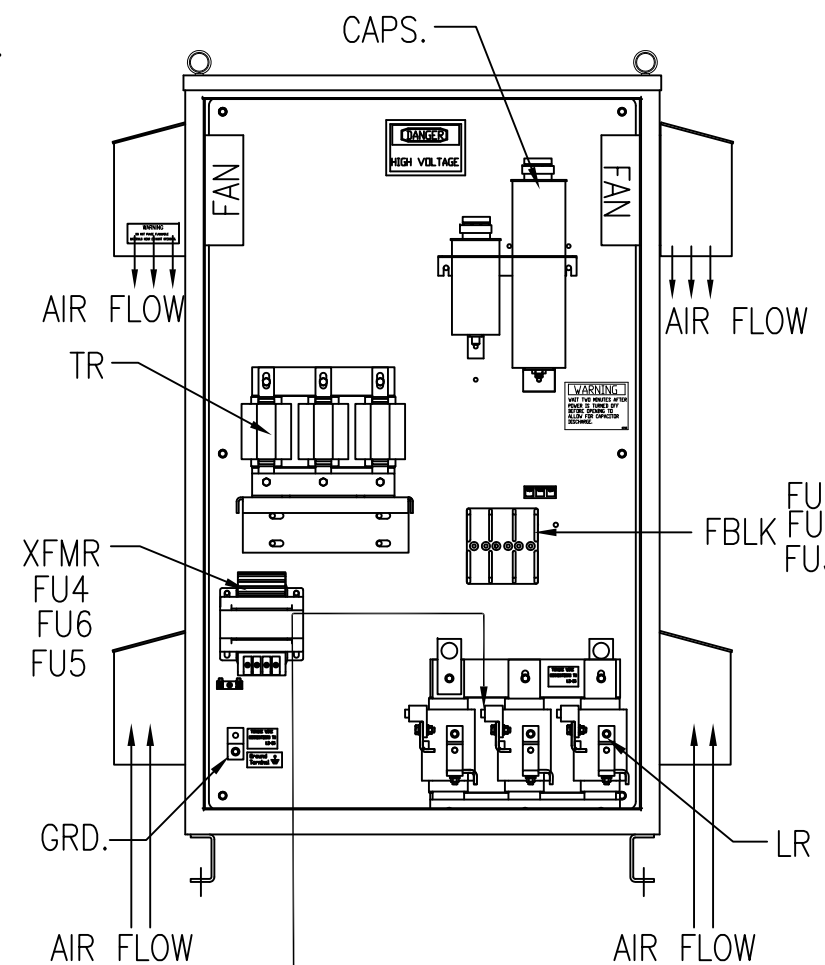

SIDE VIEW

.50 DIA HOLES  
4 PLACES.

FRONT VIEW  
WITH DOOR

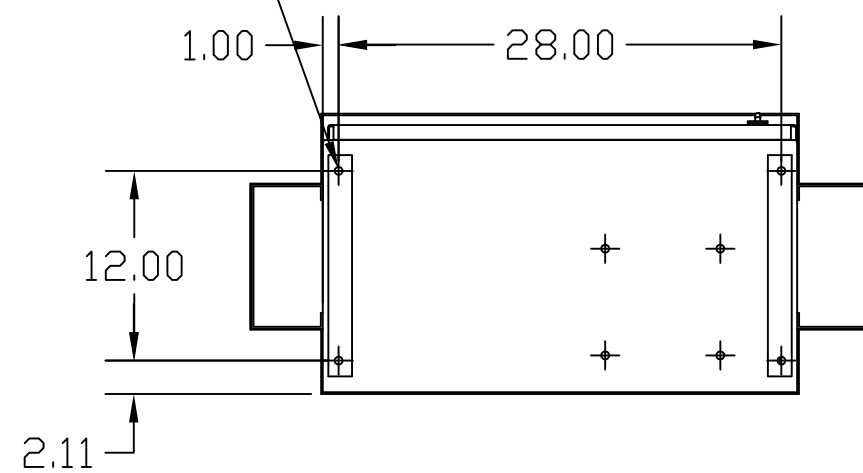

SUGGESTED CUSTOMER WIRE ENTRY  
AND EXIT LOCATION

SEE DWG# 26757 FOR SCHEMATIC

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

GROUND LUG:  
WIRE RANGE- 250MCM-6  
TIGHTENING TORQUE 275 IN-LB.

CUSTOMER CONNECTIONS  
WIRE RANGE- 250MCM-6  
TIGHTENING TORQUE 275 IN-LB.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022
				DECIMAL	
				.XX ±.12	
				.XXX±.06	
	B	2900 CHG TO ASC CAPS	3/6/13	DSW	FRACTIONAL ± 1/32
	A	2641 ADD EYEBOLTS	10/13/09	DSW	ANGULAR ± 1/2°
	NO	REVISION	DATE	BY	
					HG150AW03ST, 150HD 480/3/60 UL TYPE 3R DRN BY DSW DATE 9/12/08 DWG. NO. 103622DG SCALE TO FIT SIZE C SHT.1 OF 1