


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
45	5TH	600	60	3	150
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		260			

SYMBOL	TCI PART NUMBER
LR	KDRL42T
TR	KTR45C65HG
CAP1. 5 KVAR	KCAP5C6A
CAP2, CAP3. 20 KVAR	KCAP20C6B
Fu1, 2, 3	15740

CUSTOMER CONNECTIONS
 WIRE RANGE- 250MCM-6
 TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
 WIRE RANGE- 250MCM-6
 TIGHTENING TORQUE 275 IN-LB.

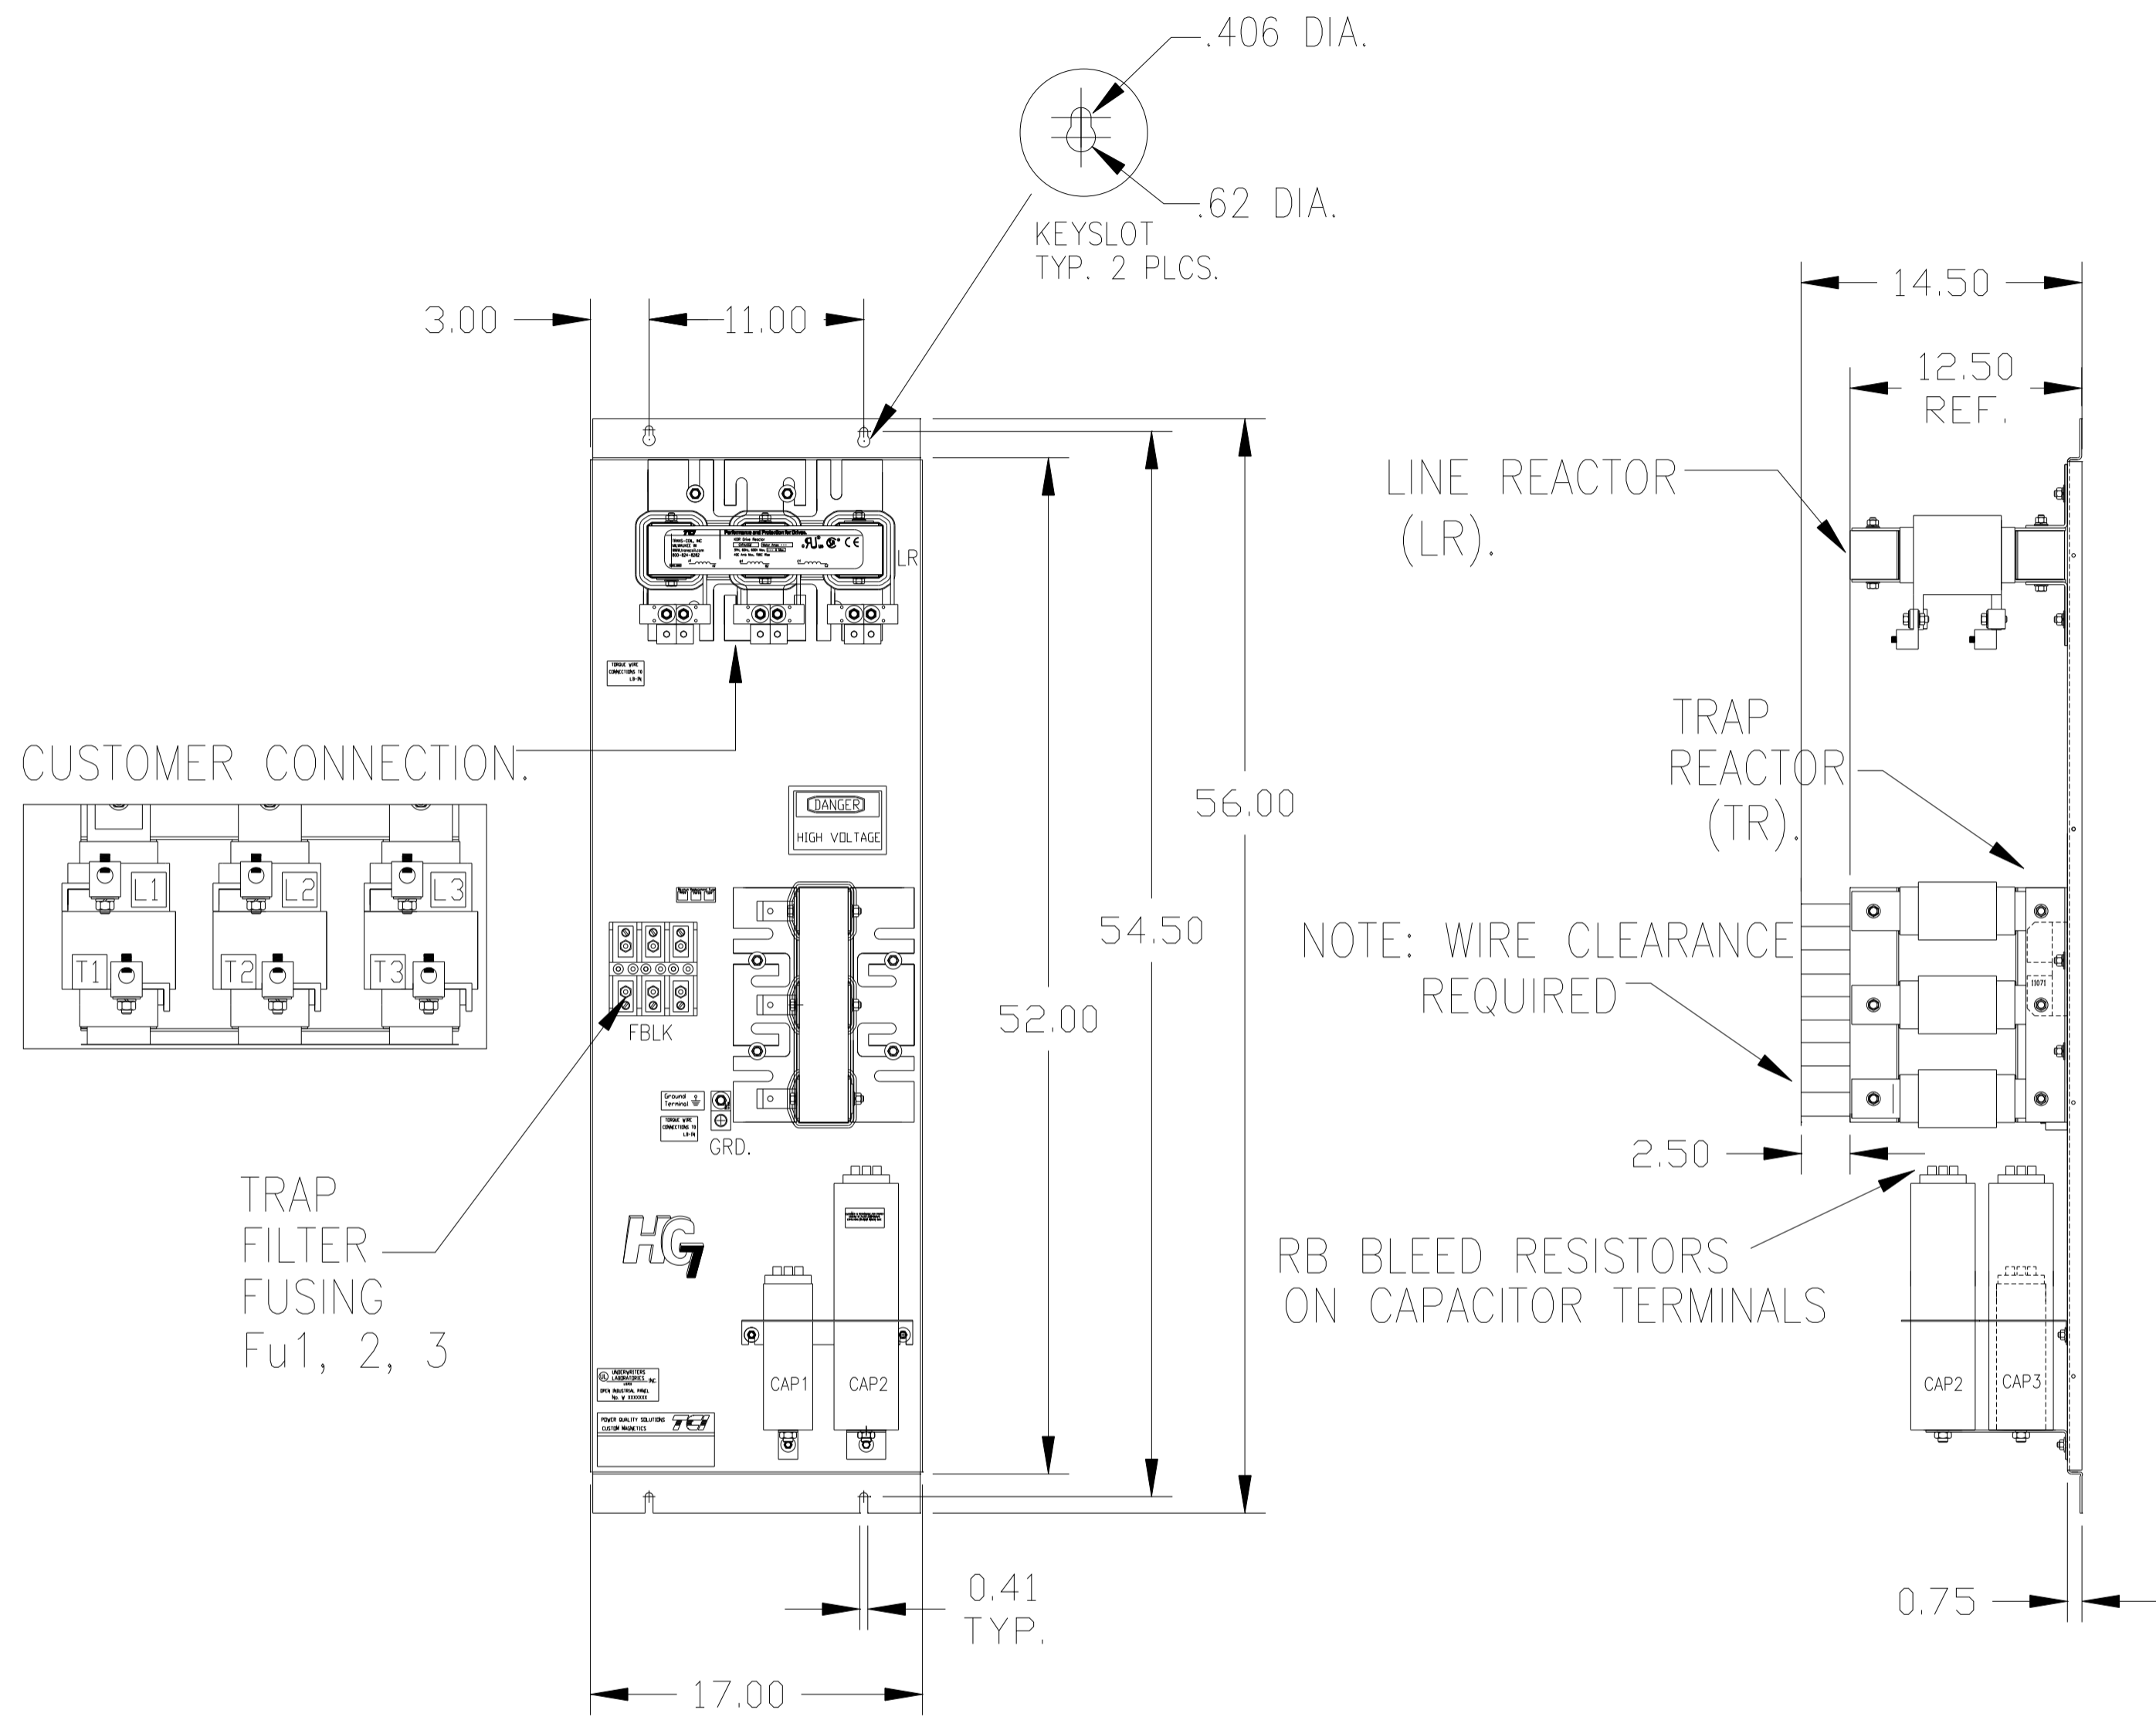

SEE 25115 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)				TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				HG150CW00ST, HG7 STANDARD 150HP, 600/3/60 OPEN	
				DRN. BY DSW	DATE 03/11/05
△	2516, CAP 1 WAS 17815			DWG. NO. 102494DG	
	CAP2, 3 WAS 18612	1/2/08	RJC	SCALE TO FIT	APRVD. C
NO	REVISION	DATE	BY		SHT. 1 OF 1