


CUSTOMER CONNECTIONS
 WIRE RANGE- 250MCM-6
 TIGHTENING TORQUE 275 IN-LB.

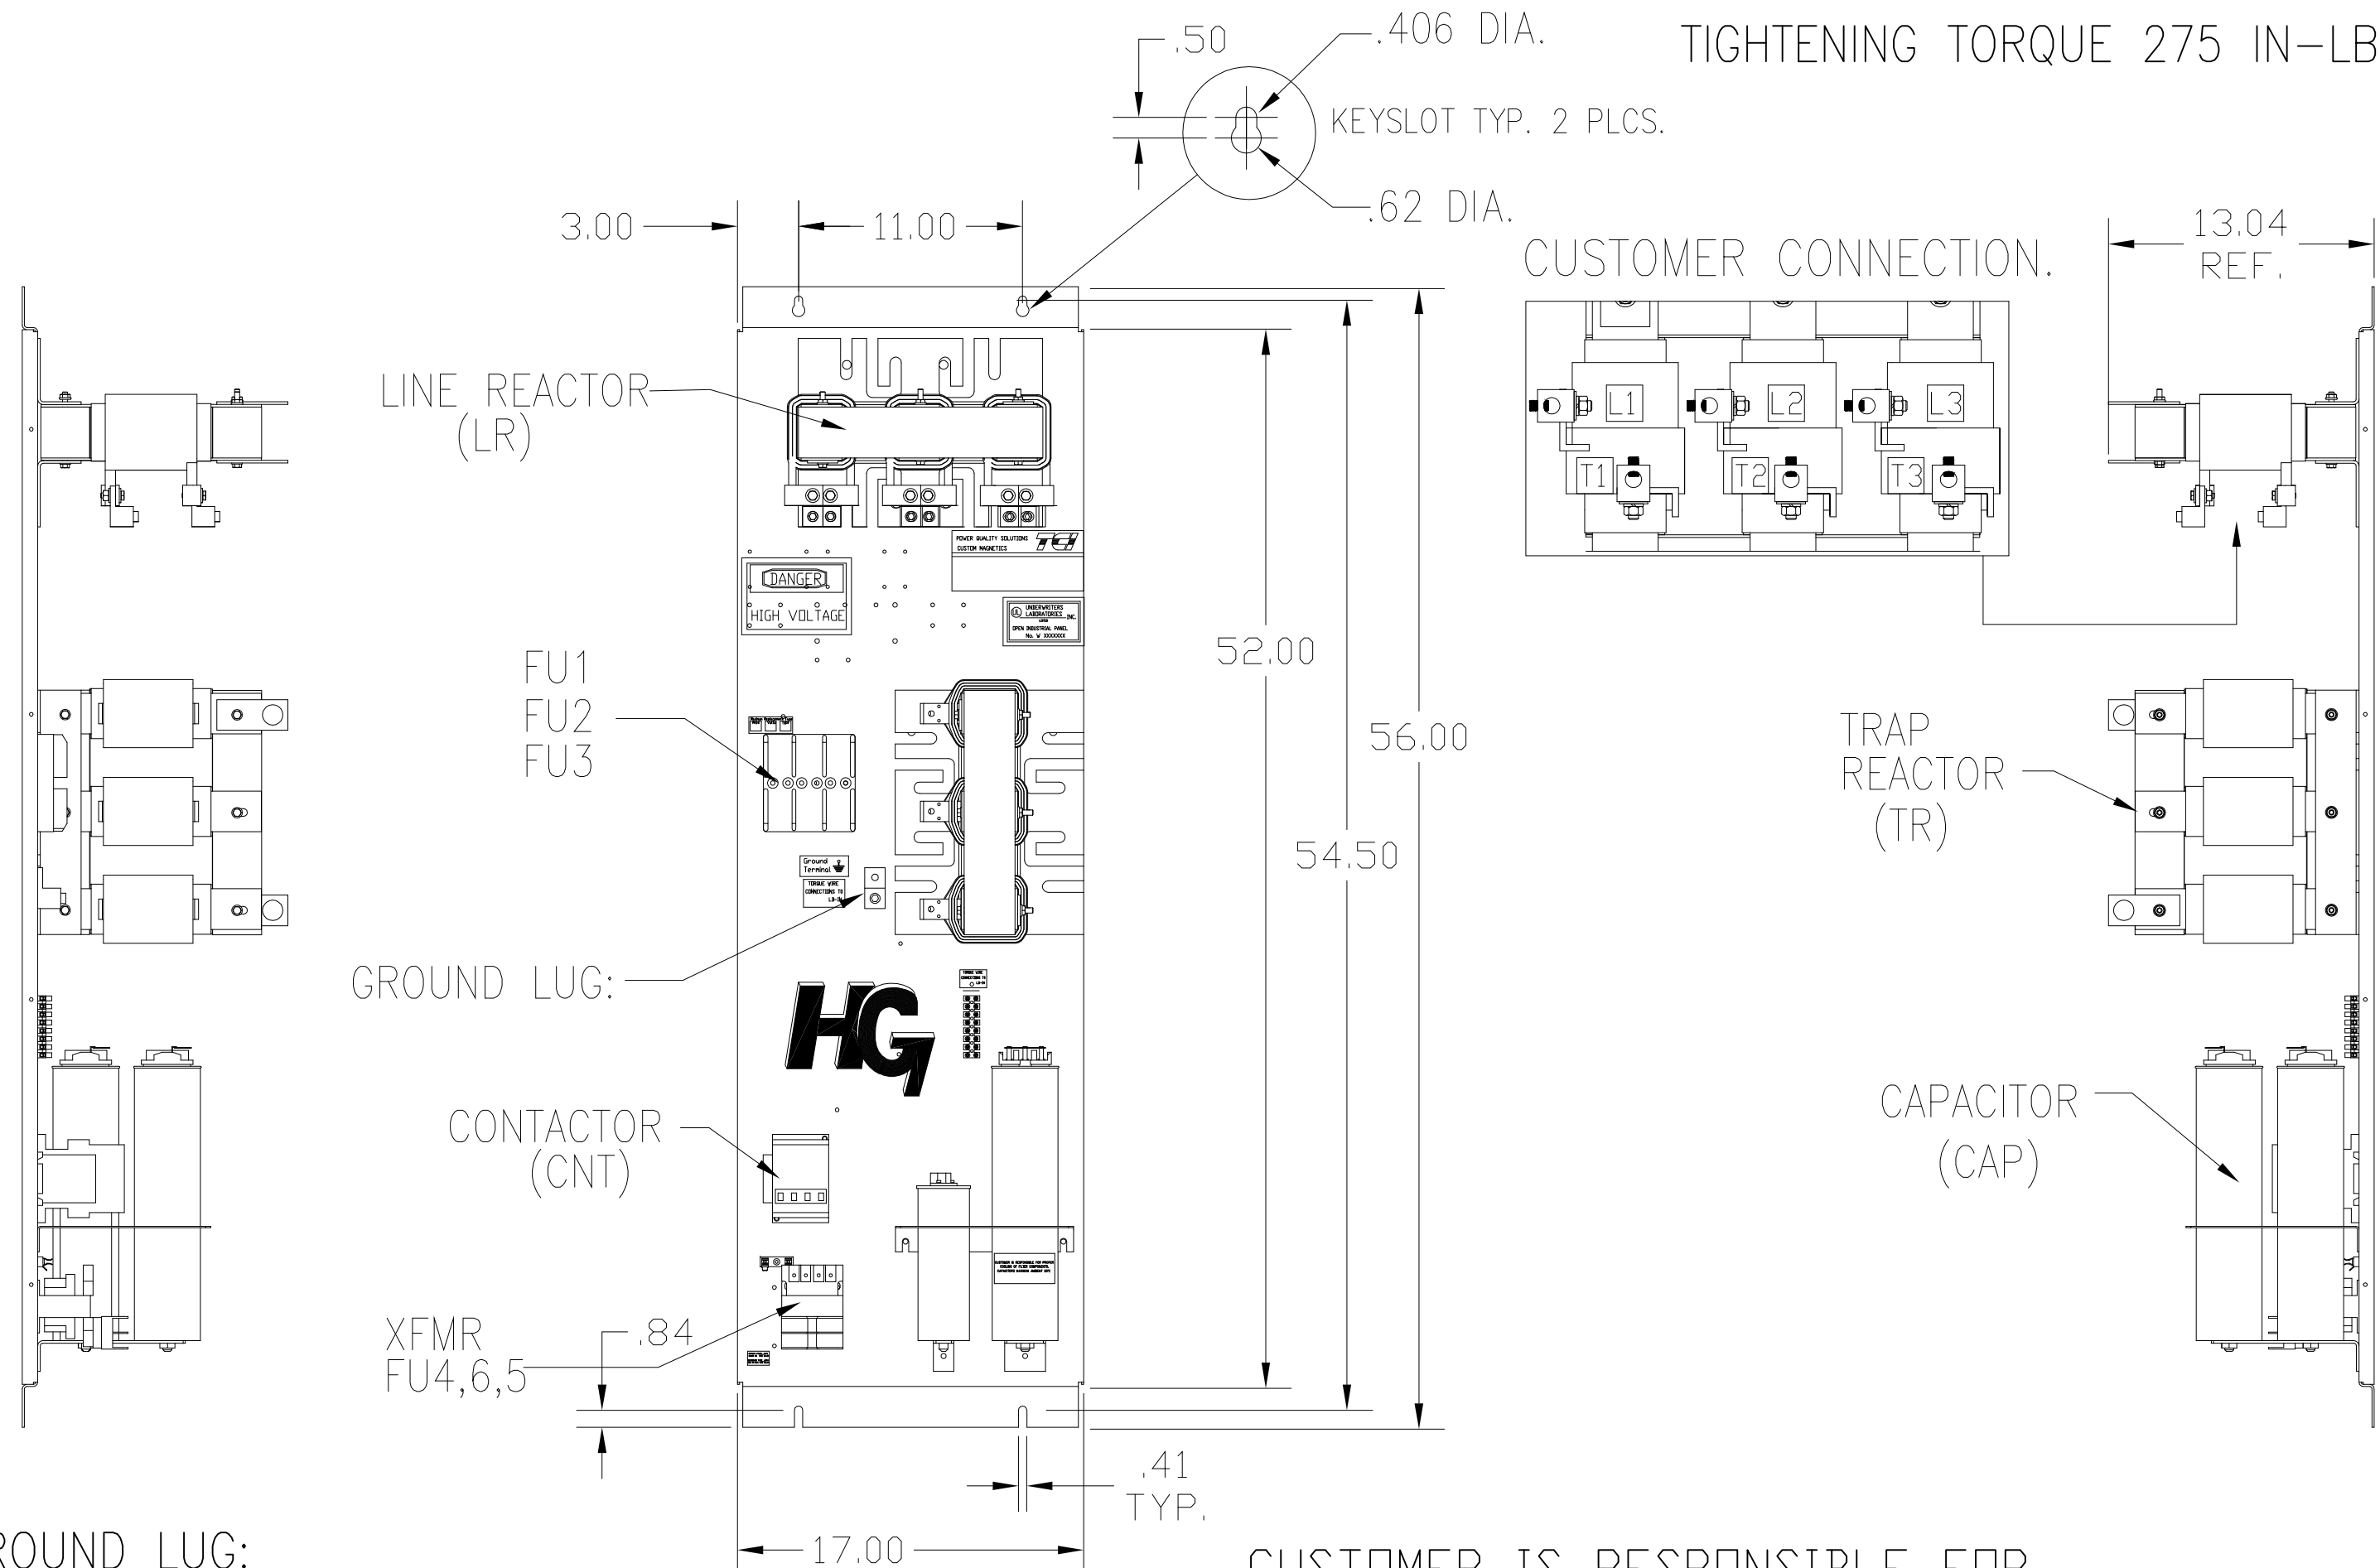

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
45	5TH	600	60	3	150
OPEN PANEL	WHITE				
FEATURES	WITH CONTACTOR				
APPROX.WT. LBS.	265				

GROUND LUG:
 WIRE RANGE- 250MCM-6
 TIGHTENING TORQUE 275 IN-LB.

CUSTOMER IS RESPONSIBLE FOR
 PROPER COOLING OF FILTER COMPONENTS.
 CAPACITORS MAXIMUM AMBIENT 50°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

SEE DWG# 26879 FOR SCHEMATIC

SYMBOL	TCI PART NUMBER
LR	KDRL42T
TR	KTR45C65HG
CAP1 5.0 KVAR	KCAP5C6A
CAP2, CAP3. 20 KVAR	KCAP20C6B
Fu1a;2a;3a	15740
Fu4,6	24126
Fu5	13364
CNT	22980

NO	REVISION	DATE	BY	TOLERANCES (EXCEPT AS NOTED)	DRN. BY	DATE	APRVD.	DWG. NO.	SCALE
				DECIMAL .XX ± .03 .XXX ± .01	DSW	4/2/09		103576DG	TO SCALE
				FRACTIONAL ± 1/32					
				ANGULAR ± 1/2°					

TCI 7878 N. 86th STREET
 MILWAUKEE, WI 53224

HG150CW00STC, 150HP
 600/3/60, OPEN, WITH CNT

SHT.1 OF1