


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
45	5TH	600	60	3	150
ENCLOSURE		TYPE 3R- COLOR, WHITE			
APPROX.WT. LBS		432			


CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.


SEE DWG# 26972-2 FOR SCHEMATIC

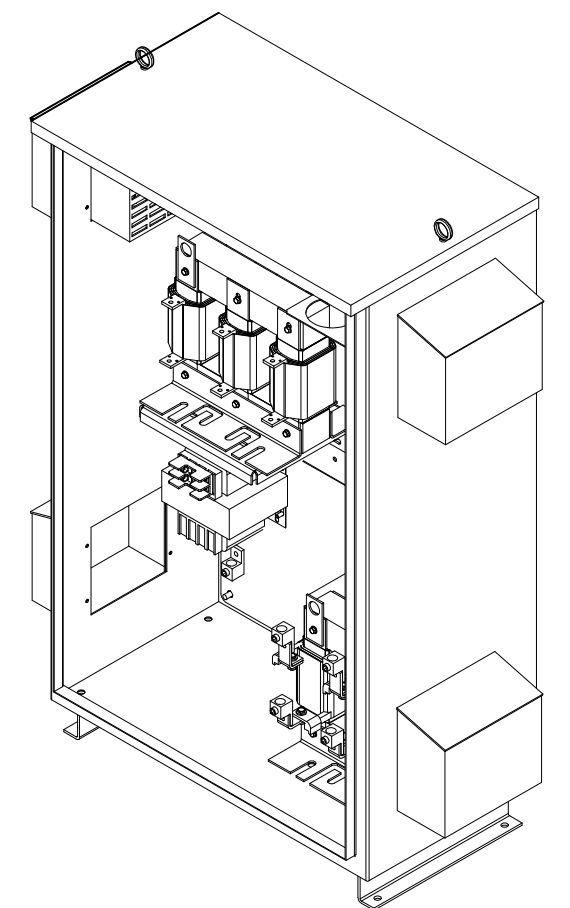



FRONT VIEW WITHOUT DOOR

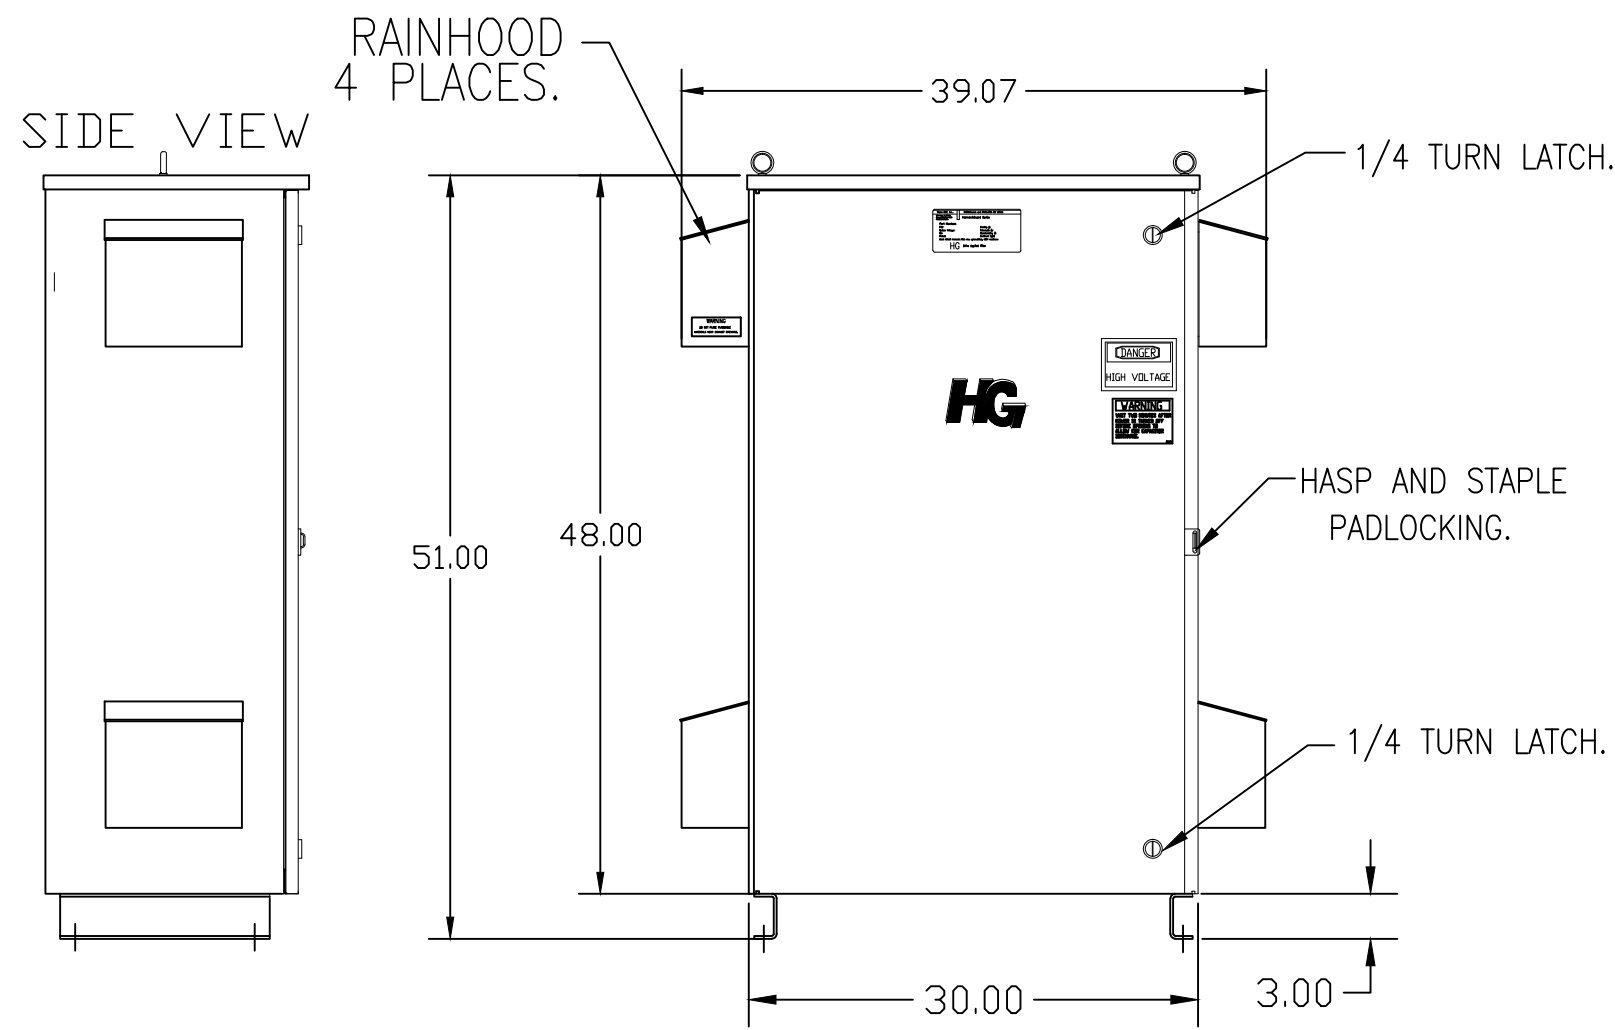

FRONT VIEW WITH DOOR

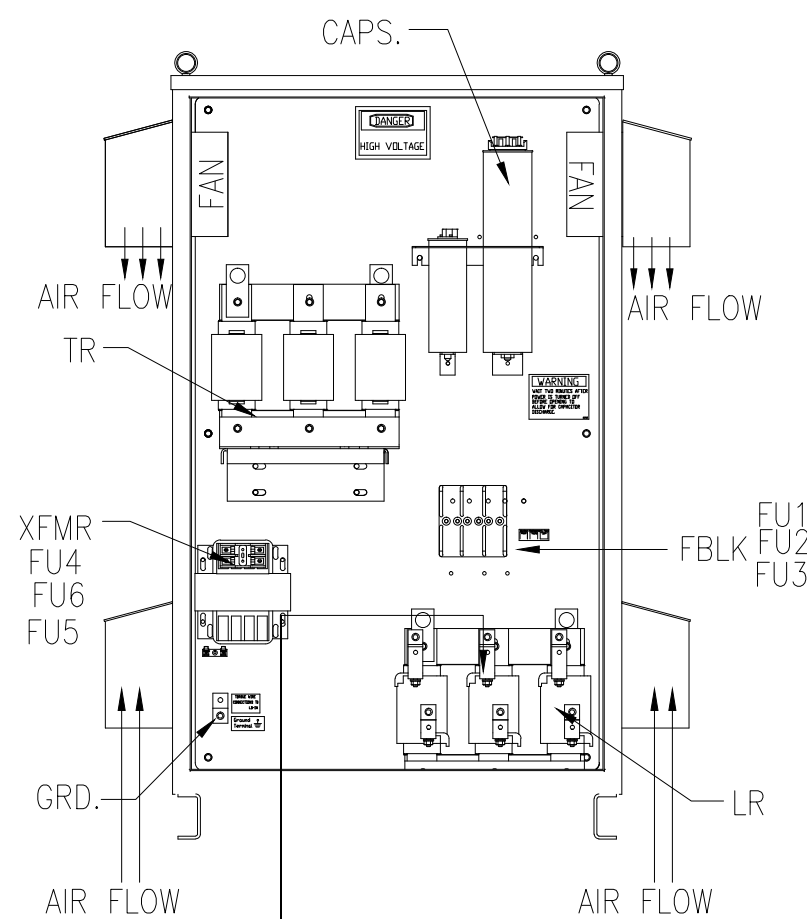

SUGGESTED CUSTOMER WIRE ENTRY AND EXIT LOCATION

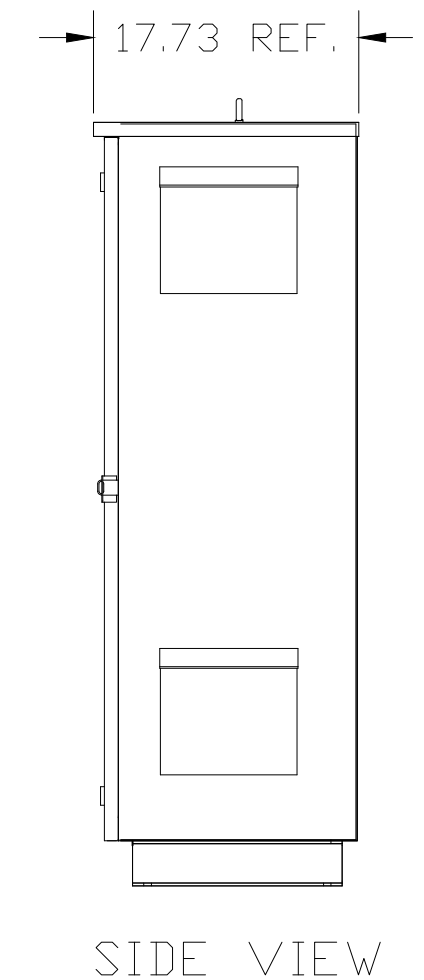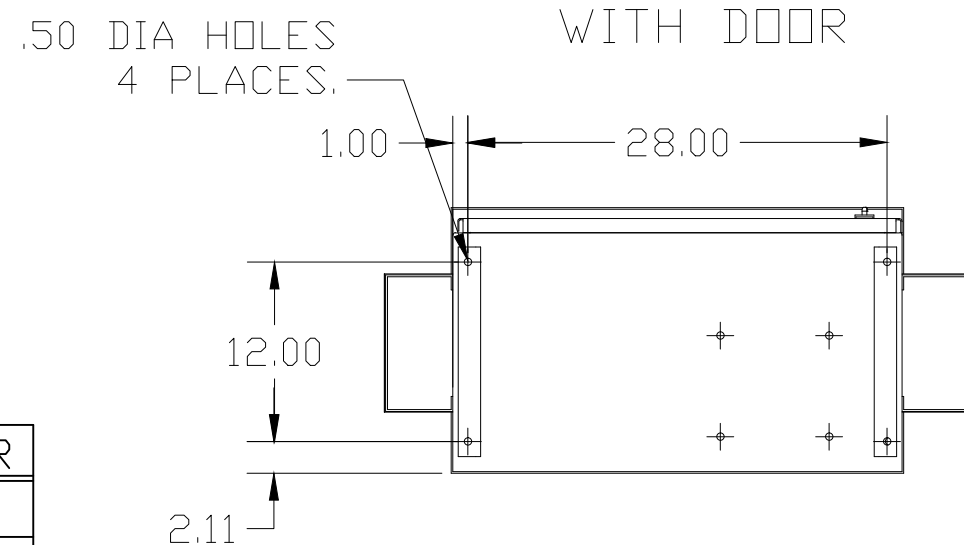

SIDE VIEW

INSIDE DOOR

SIDE VIEW

SYMBOL	TCI PART NUMBER
LR	KDRL42T
TR	KTR45C65HG
CAP (20 KVAR) , 2 PLACES	KCAP20C6B
CAP (5 KVAR) , 1 PLACES	KCAP5C6A
XFMR.	24389
Fu1;2;3	15740
Fu4,6	24126
Fu5	13364

GROUND LUG:  
WIRE RANGE- 250MCM-6  
TIGHTENING TORQUE 275 IN-LB.

CUSTOMER CONNECTIONS  
WIRE RANGE- 250MCM-6  
TIGHTENING TORQUE 275 IN-LB.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.				TOLERANCES (EXCEPT AS NOTED)	W132 N10611 Grant Drive Germantown, WI 53022 <b>HG150CW03ST, 150HP</b> <b>600/3/60 UL TYPE 3R</b>
				DECIMAL	
				.XX ±.12 .XXX±.06	
				FRACTIONAL ± 1/32	
	Δ 2641 ADD EYEBOLTS	10/13/09	DSW	ANGULAR ± 1/2°	DRN. BY DSW DATE 2/25/09 DWG. NO. 103642DG
	NO REVISION	DATE	BY		SCALE TO FIT SIZE C SHT. 1 OF 1