


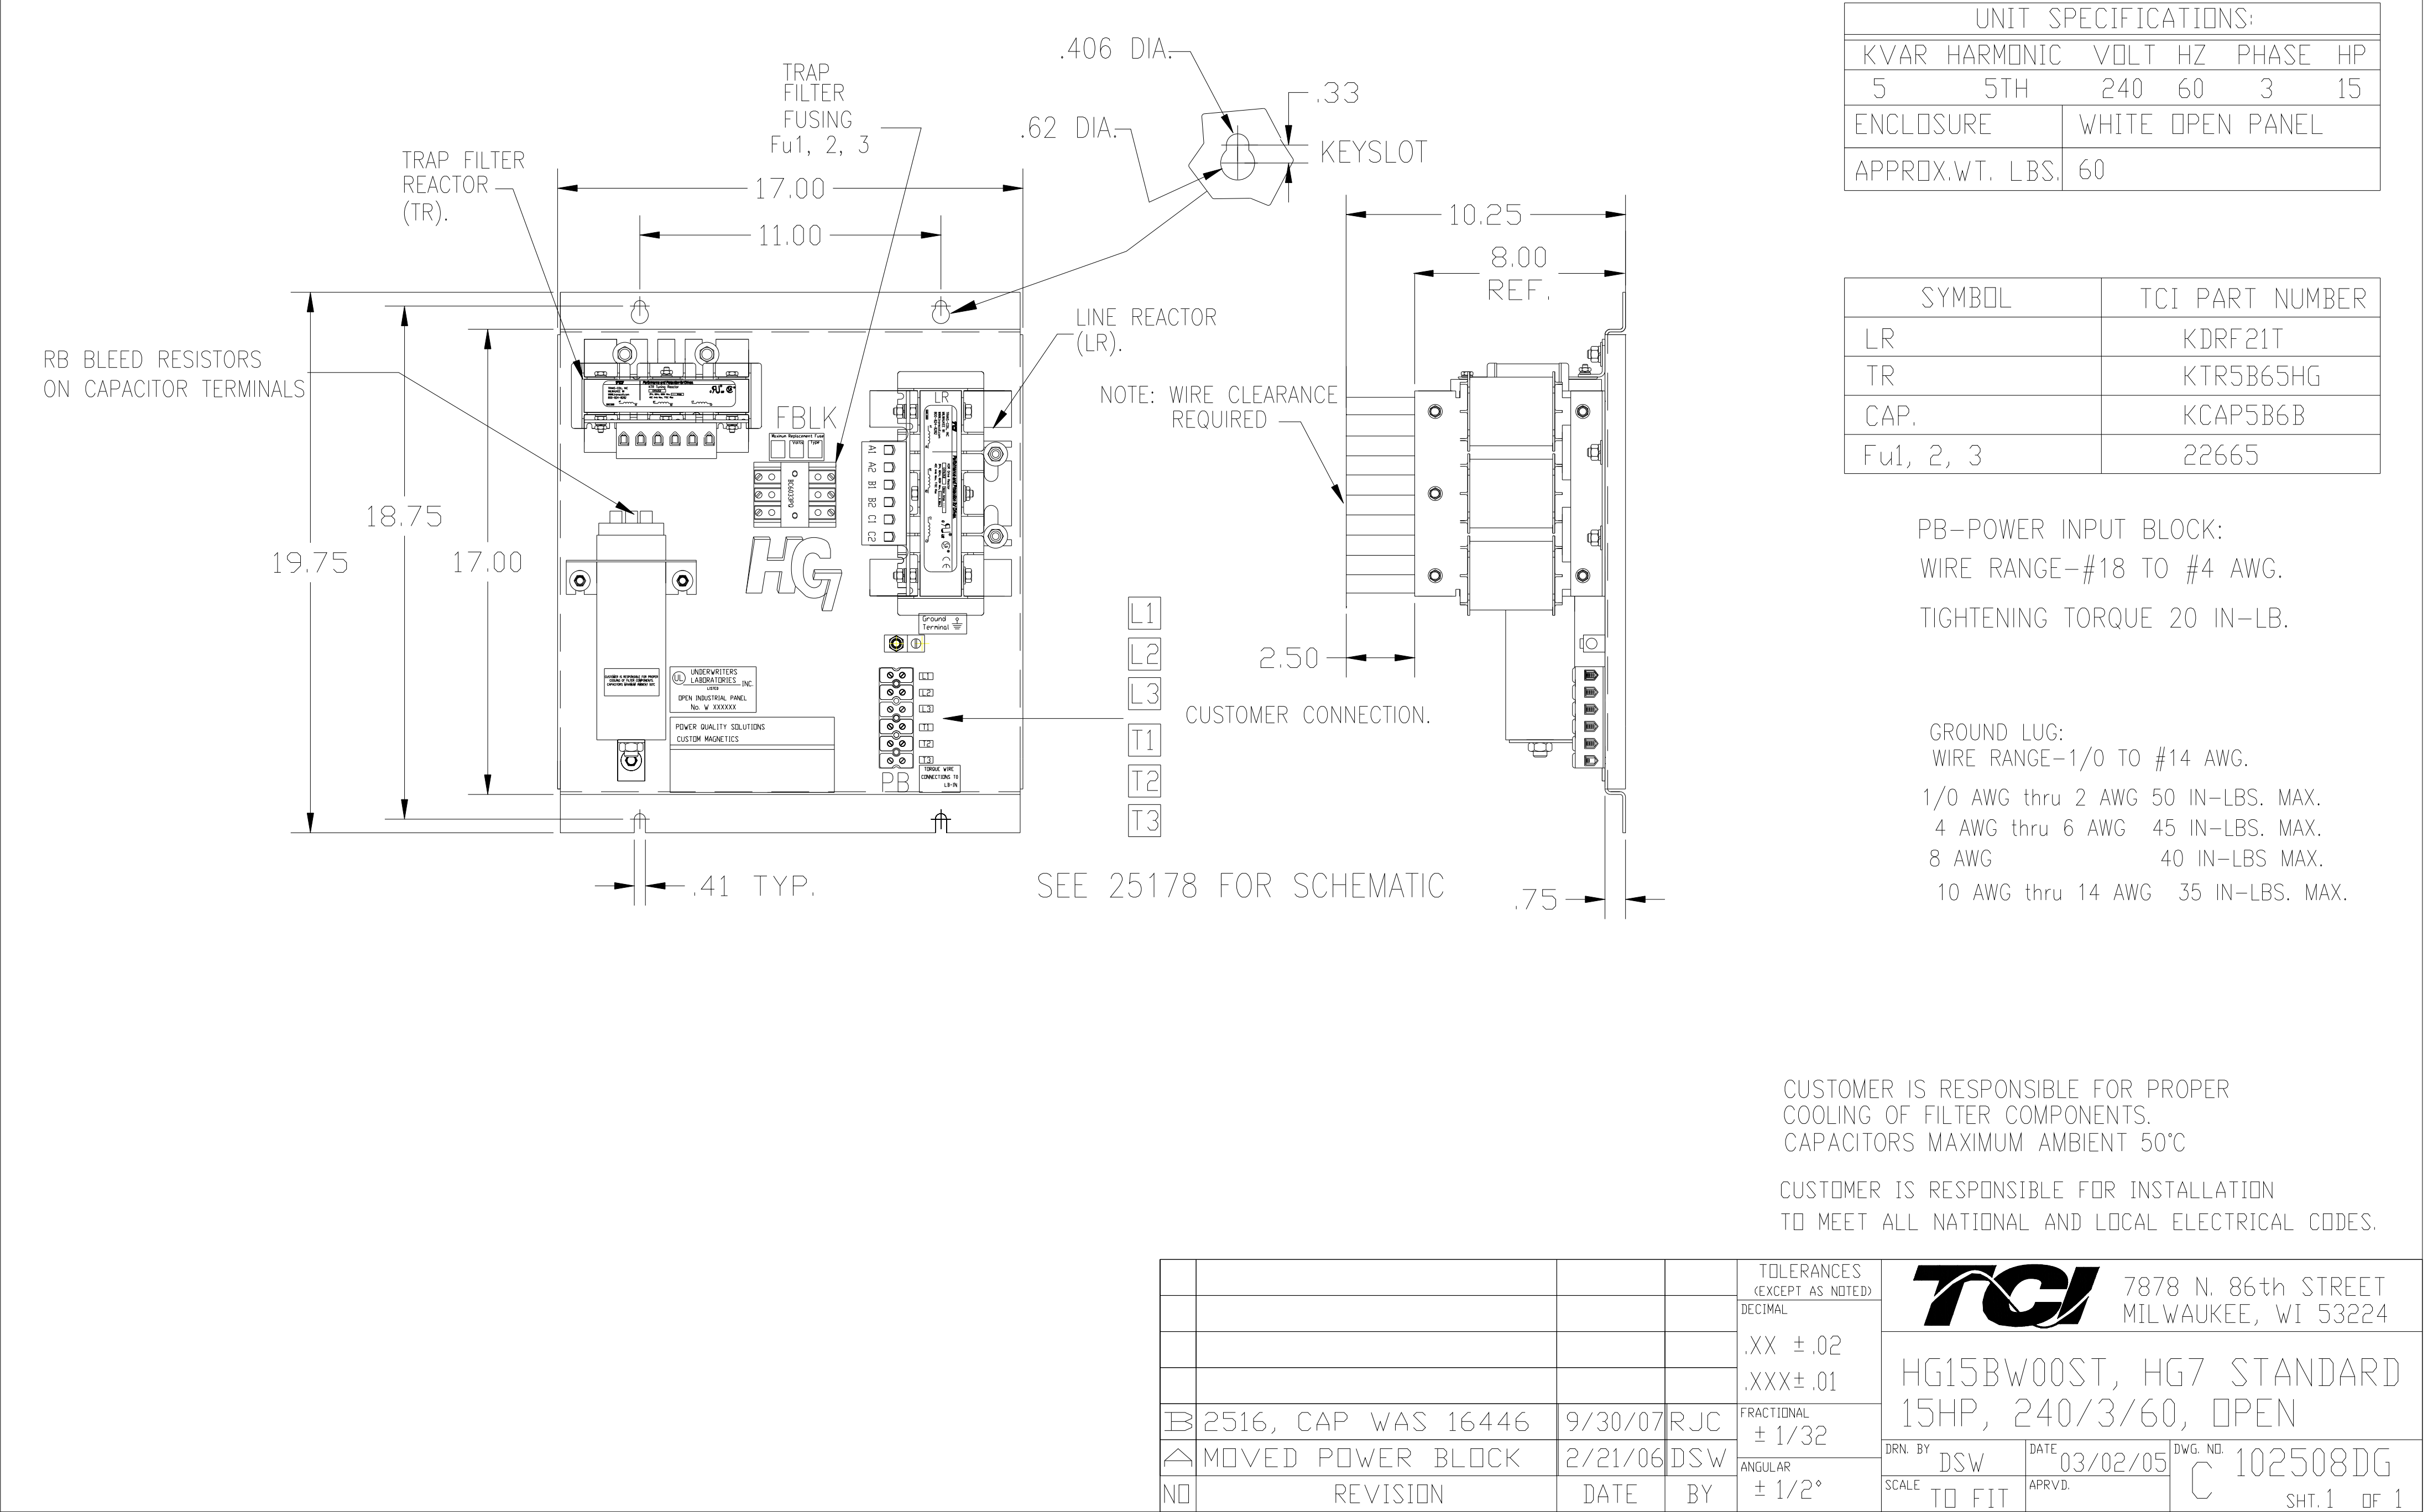

UNIT SPECIFICATIONS:					
KVAR HARMONIC	VOLT	HZ	PHASE	HP	
5	5TH	240	60	3	15
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		60			

SYMBOL	TCI PART NUMBER
LR	KDRF21T
TR	KTR5B65HG
CAP.	KCAP5B6B
Fu1, 2, 3	22665

PB-POWER INPUT BLOCK:
WIRE RANGE-#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.
1/0 AWG thru 2 AWG 50 IN-LBS. MAX.
4 AWG thru 6 AWG 45 IN-LBS. MAX.
8 AWG 40 IN-LBS MAX.
10 AWG thru 14 AWG 35 IN-LBS. MAX.

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		
				.XX ±.02		
				.XXX±.01		
B	2516, CAP WAS 16446	9/30/07	RJC	FRACTIONAL ± 1/32	HG15BW00ST, HG7 STANDARD 15HP, 240/3/60, OPEN	
A	MOVED POWER BLOCK	2/21/06	DSW	ANGULAR ± 1/2°		
NO	REVISION	DATE	BY		DRN. BY SCALE TO FIT	DATE APRVD.
						DWG. NO. C 102508DG SHT. 1 OF 1