

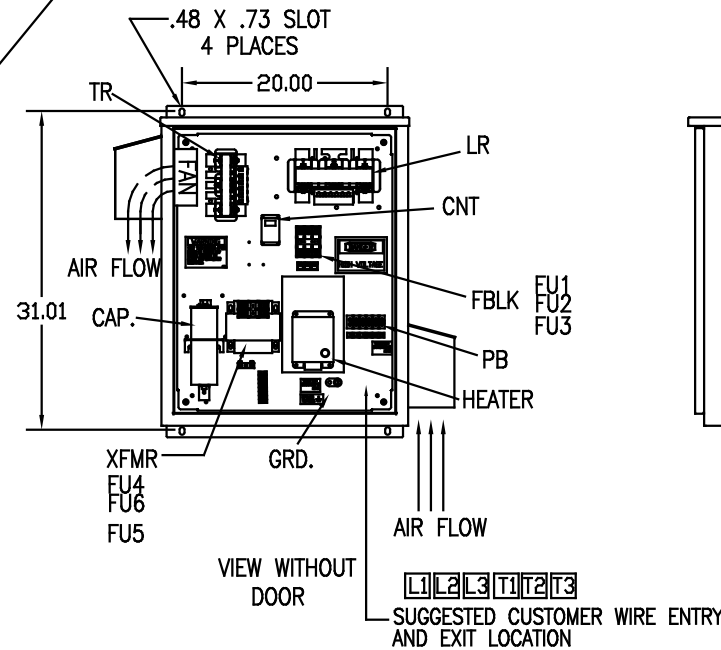
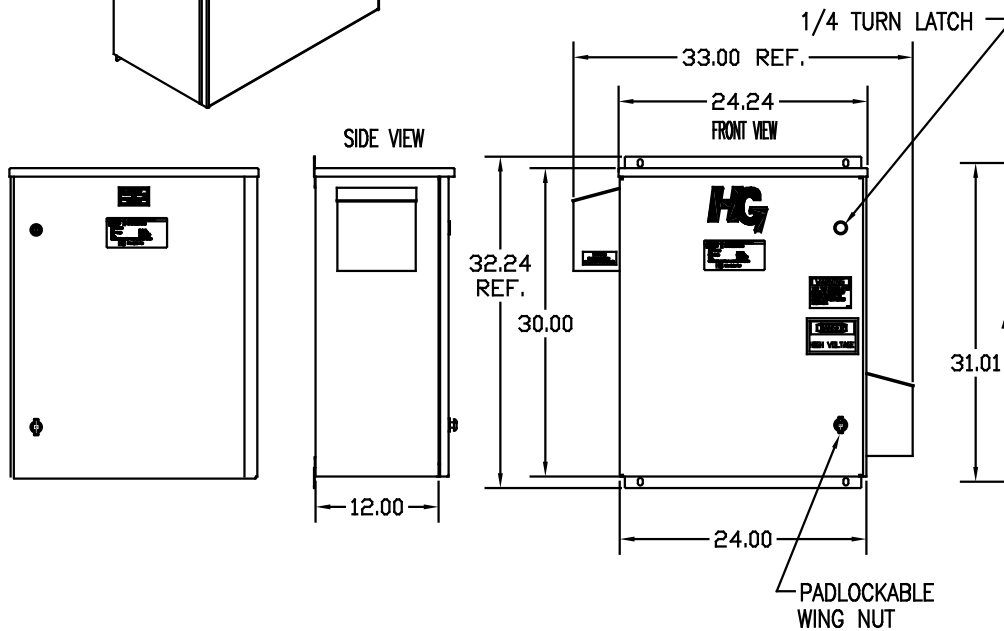
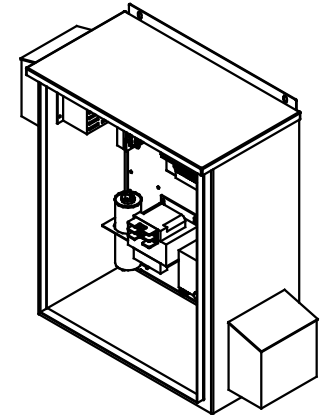


SEE DWG# 26972 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

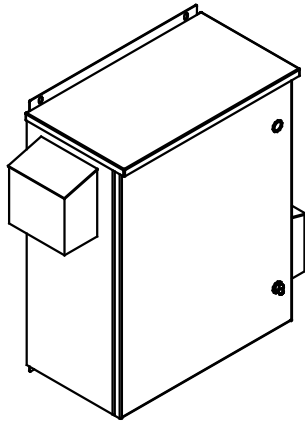

UNIT SPECIFICATIONS:					
KVAR HARMONIC	VOLT	HZ	PHASE	HP	
5	5TH	600	60	3	15
ENCLOSURE	UL TYPE 3R				
COLOR	WHITE				
FEATURES	CONTACTOR, HEATER				
APPROX.WT. LBS.	140				

SYMBOL	TCI PART NUMBER
LR	KDRF41T
TR	KTR5C65HG
CAP. (5 KVAR), 1 PLACE.	KCAP5C6A
XFMR.	24381
Fu1, 2, 3	11263
Fu4,6	23405
Fu5	17567
CNT	26739
HEATER (200 WATT)	11638

PB-POWER INPUT BLOCK:
WIRE RANGE-#18 TO #4 AWG.
TIGHTENING TORQUE 20 IN-LB.

GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.
TIGHTENING TORQUE 200 IN-LB.

				TOLERANCES EXCEPT AS NOTED	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				XX ±.12 XXX±.06 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	
				NO REVISION	HG15CW03STCH, 15HP 600/3/60 UL TYPE 3R
				DATE	DATE
				BY	BY
				SCALE	SCALE
				TO FIT	TO FIT
				APPROVAL	APPROVAL
				103744DG	103744DG
				SHT. 1	OF 1