


RB BLEED RESISTORS
ON CAPACITOR TERMINALS

TRAP
REACTOR
(TR).

LINE REACTOR
(LR).

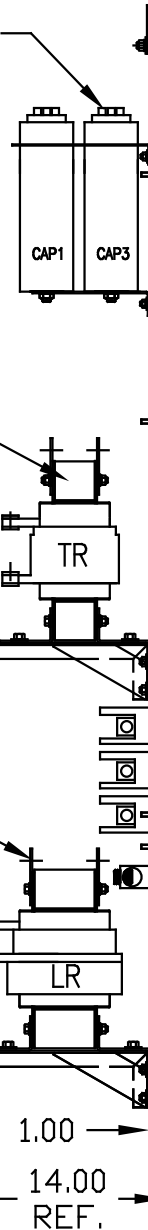

UNIT SPECIFICATIONS:

KVAR	HARMONIC	VOLT	HZ	PHASE	HP
60	5TH	480	60	3	200
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		350			

SYMBOL	TCI PART NUMBER
LR	KDRS1T
TR	KTR60A65HG
CAP1, CAP2, CAP3.	23123
Fu1, 2, 3	11305

CUSTOMER CONNECTIONS:

WIRE RANGE-ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:

WIRE RANGE-ONE 600MCM-4
TWO 250MCM-1/0
TIGHTENING TORQUE 500 IN-LB.

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CUSTOMER CONNECTIONS:

L1 L2 L3
T1 T2 T3

SEE 25078 FOR SCHEMATIC

				TOLERANCES EXCEPT AS NOTED	7878 N. 86th STREET MILWAUKEE, WI 53224
				XX ±.03	
				.XXX ±.01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	HG200AW00ST, HG7 STANDARD 200HP, 480/3/60 OPEN <div> <div>DRW BY</div> <div>DSW</div> </div> <div> <div>DATE</div> <div>03/04/05</div> </div> <div> <div>DRW. NO.</div> <div>102548DG</div> </div> <div> <div>SCALE</div> <div>TO FIT</div> </div> <div> <div>APPROV</div> <div>C</div> </div> <div> <div>SHT. 1</div> <div>OF 1</div> </div>
NO	REVISION	DATE	BY		