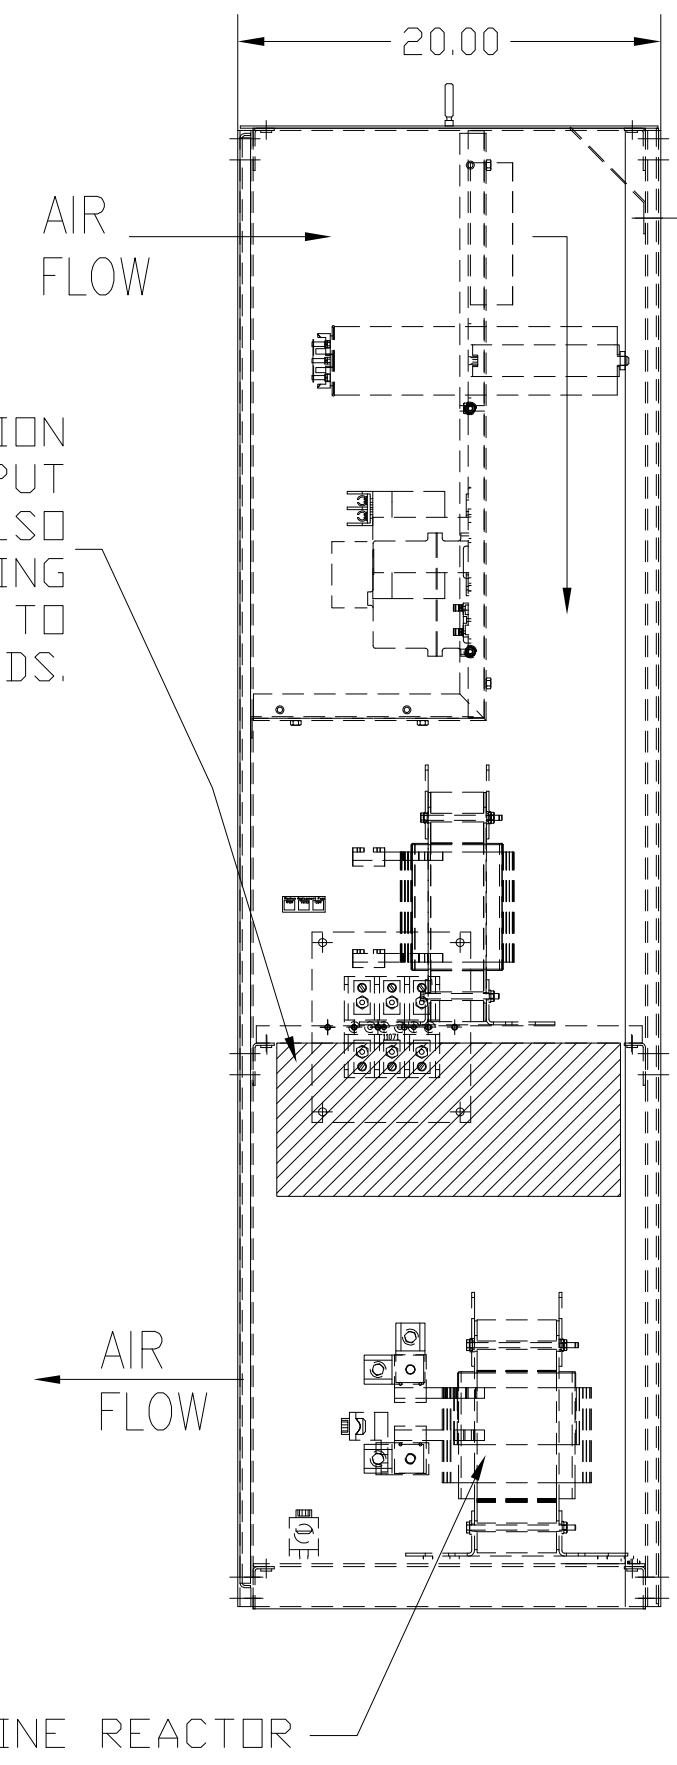
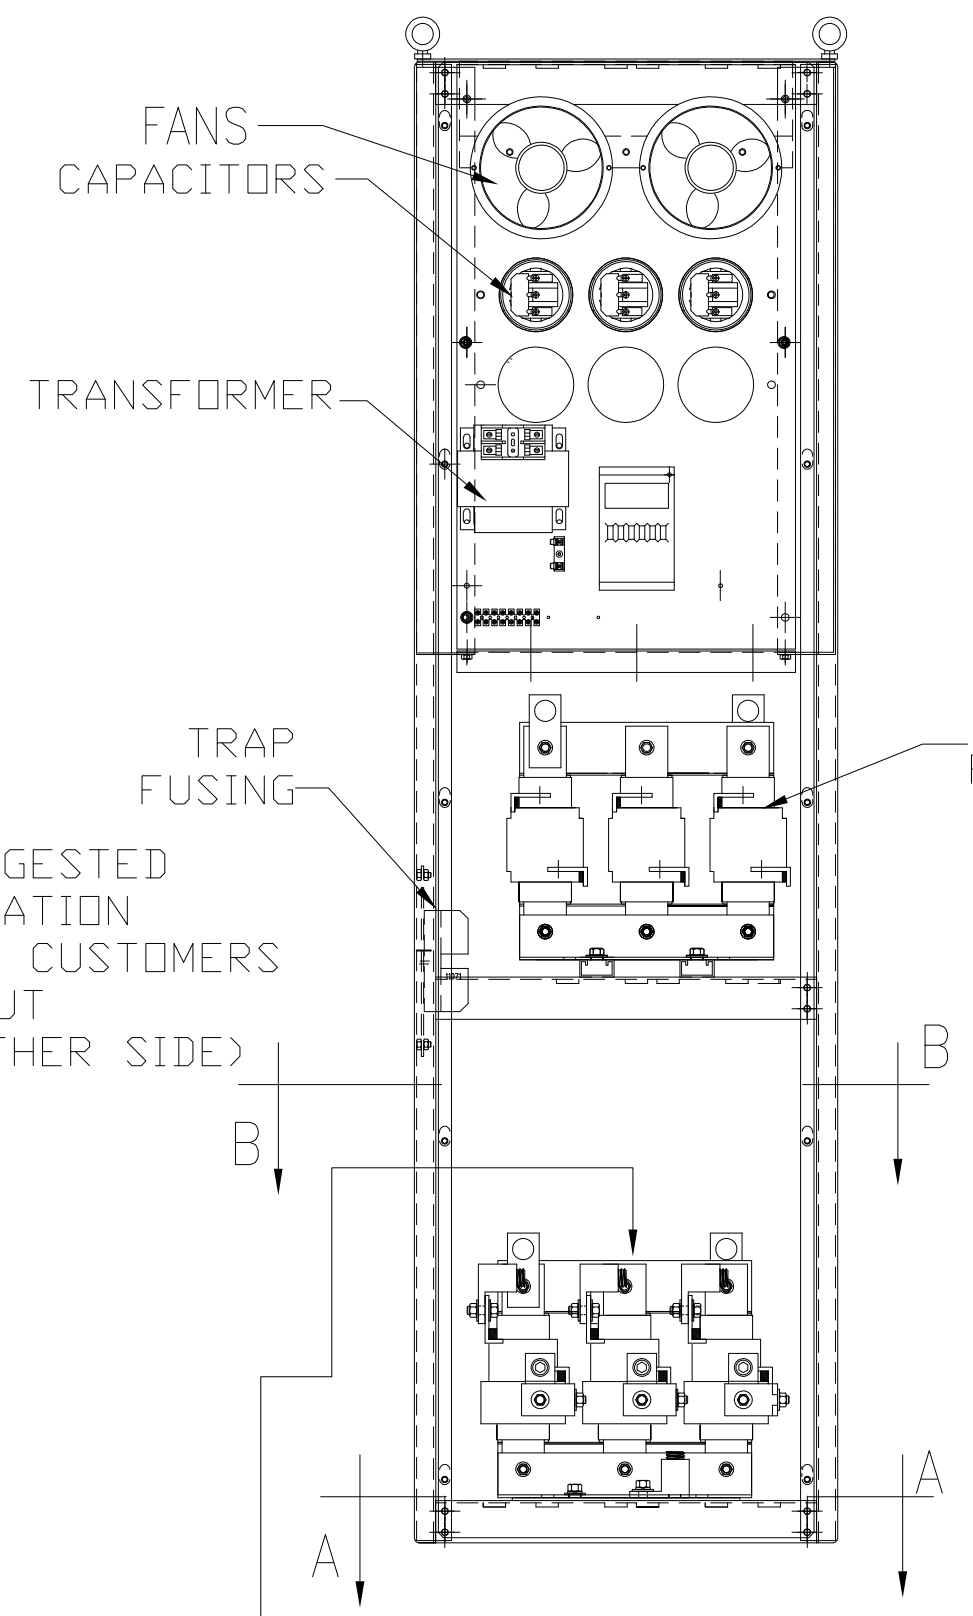
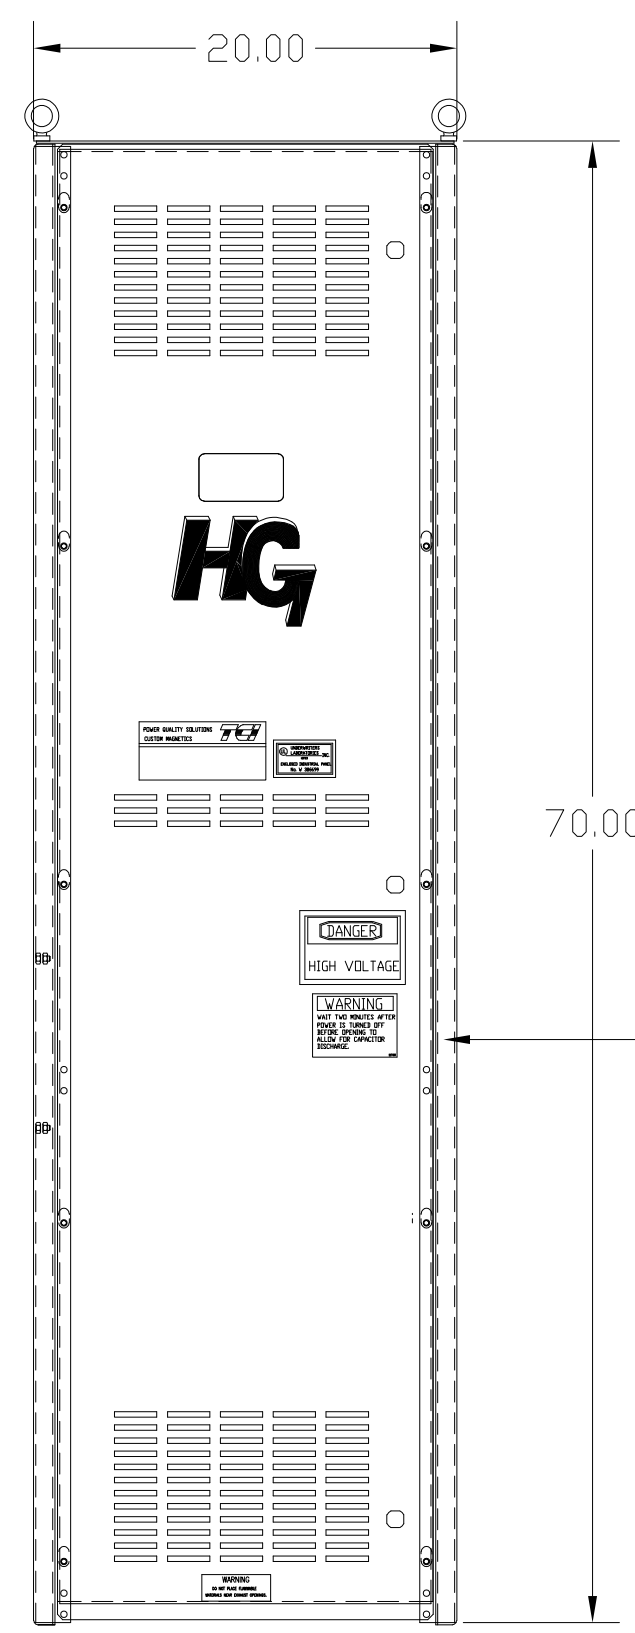
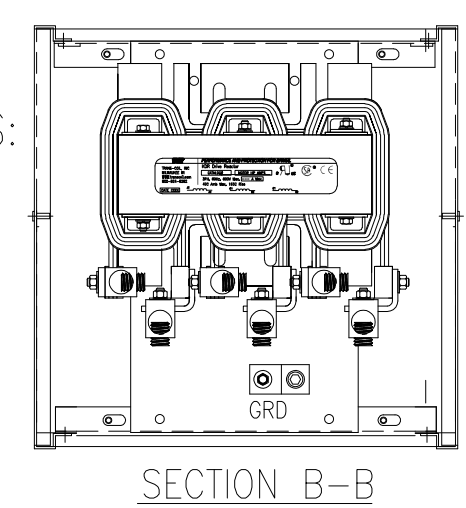


 MOUNTING BAR
 (FOR CUSTOMER MTG
 OF UNIT TO FLOOR)
 SHIP WITH ENCLOSURE.



SUGGESTED LOCATION
 FOR CUSTOMERS INPUT
 OPPOSITE SIDE ALSO
 AVAILABLE BY MOVING
 FUSES AND TR TO
 EXISTING MOUNTING STUDS.

CUSTOMER CONNECTIONS:



CUSTOMER CONNECTIONS:
 WIRE RANGE-ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:
 WIRE RANGE-ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

SEE DWG# 26973-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
60	5TH	600	60	3	200
ENCLOSURE	NEMA 1				
FEATURES	WITH CONTACTOR				
APPROX.WT. LBS.	510				

SYMBOL	TCI PART NUMBER
LR	KDRS41T
TR	KTR60C65HG
CAP1,2,3 (20 KVAR)	KCAP20C6B
Fu1a;2a;3a	11077
Fu4,6	24073
Fu5	13362
CNT	19246

TOLERANCES (EXCEPT AS NOTED)				TCI® W132 N10611 Grant Drive Germentown, WI 53022	
			DECIMAL	HG200CW01STC, CNT 200 HP, 600/3/60, TYPE 1	
			.XX ±.03		
			.XXX ±.01		
			FRACTIONAL	DRN. BY DSW DATE 03/18/09 DWG. NO. 103557dg SCALE TO FIT APRVD. C	
			± 1/32		
			ANGULAR		
4077	COLOR REMOVED	7/25/17	JRN	SHT.1 OF1	
NO	REVISION	DATE	BY		