
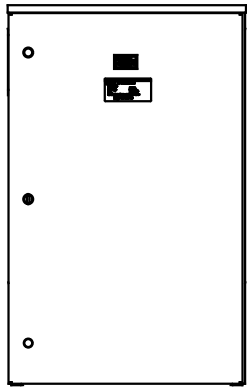


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
60	5TH	600	60	3	200
ENCLOSURE		TYPE 3R- COLOR, WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS		484			


SEE DWG# 26973-1 FOR SCHEMATIC

TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES,  
CUSTOMER IS RESPONSIBLE FOR INSTALLATION


NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

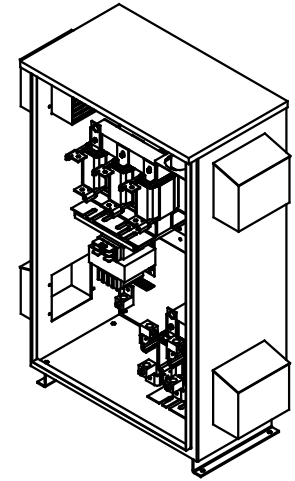



INSIDE VIEW  
OF DOOR

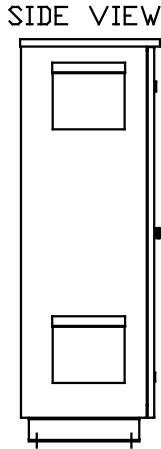


SIDE VIEW

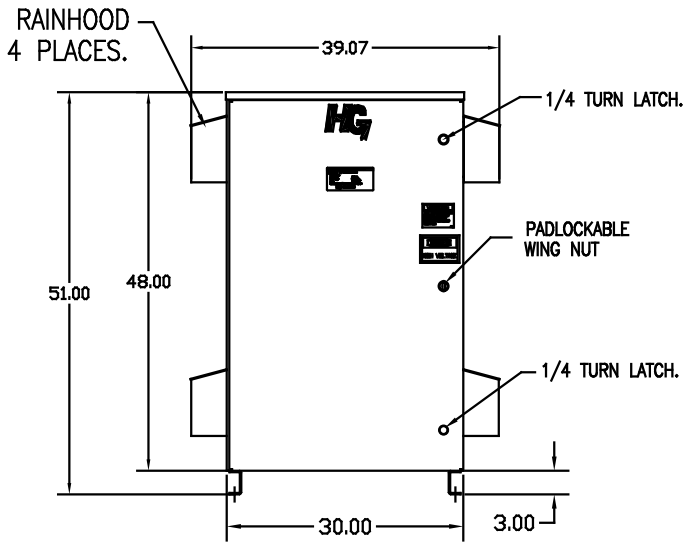

FRONT VIEW  
WITHOUT DOOR

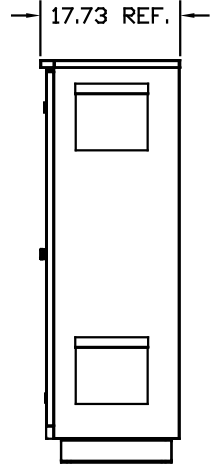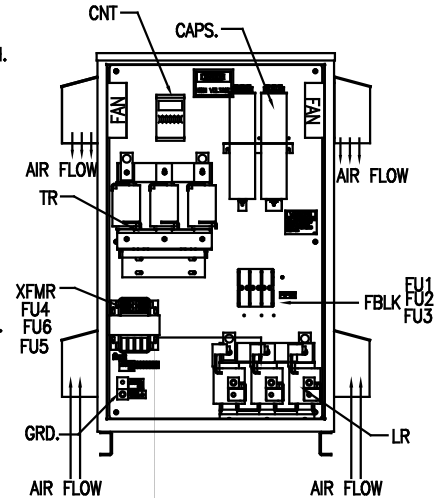

SIDE VIEW

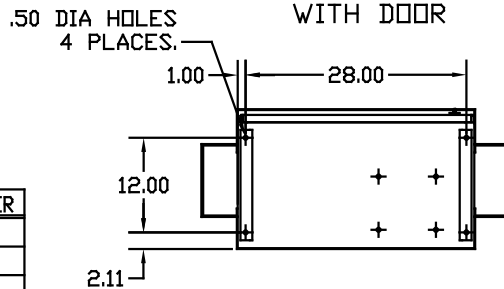

FRONT VIEW  
WITH DOOR

L1 L2 L3 T1 T2 T3

SUGGESTED CUSTOMER WIRE ENTRY  
AND EXIT LOCATION

GROUND LUG:  
WIRE RANGE-ONE 600MCM-4  
TWO 250MCM-1/0  
TIGHTENING TORQUE 500 IN.-LB.

CUSTOMER CONNECTIONS  
WIRE RANGE-ONE 600MCM-4  
TWO 250MCM-1/0  
TIGHTENING TORQUE 500 IN.-LB.

SYMBOL	TCI PART NUMBER
LR	KDRS41T
TR	KTR60C65HG
CAP (20 KVAR) , 3 PLACES	KCAP20C6B
XFMR.	24389
Fu1,2,3	11077
Fu4,6	24073
Fu5	13362
CNT	19246

NO	REVISION	DATE	BY	TOLERANCES EXCEPT AS NOTED: DIMEN. XX ±.12 .XXX±.06 FRACTIONAL ± 1/32 ANGULAR ± 1/2°	7878 N. 86th STREET MILWAUKEE, WI 53224
					HG200CW03STC, 200HP 600/3/60 UL TYPE 3R
					DRW BY DSW DATE 02/18/09 DWG. NO. 103698DG
					SCALE TO FIT APPROV. C SHI.1 OF 1