
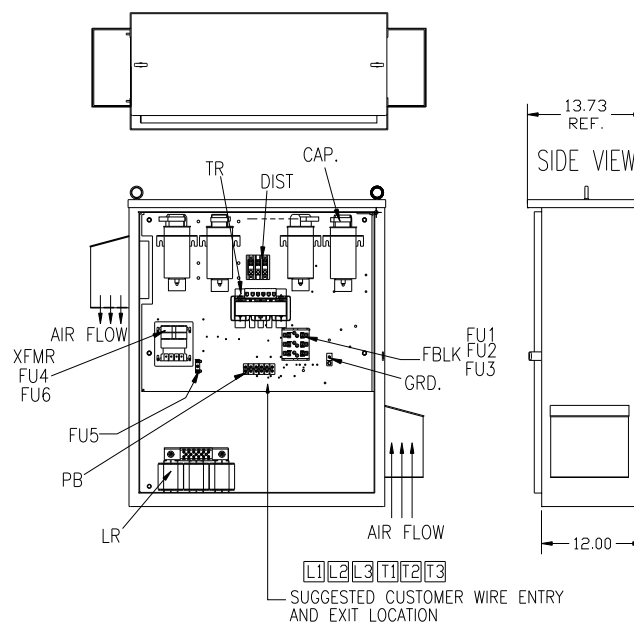
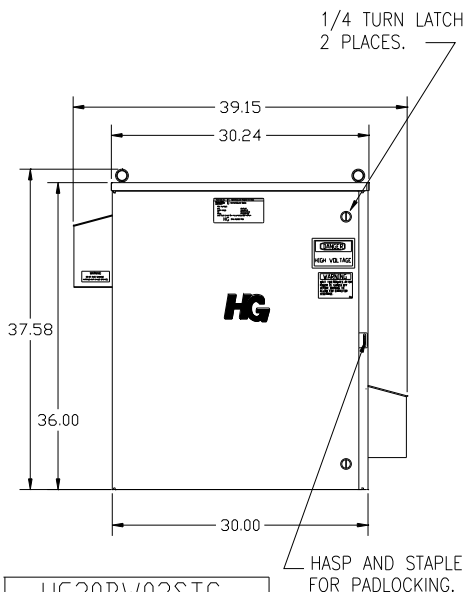
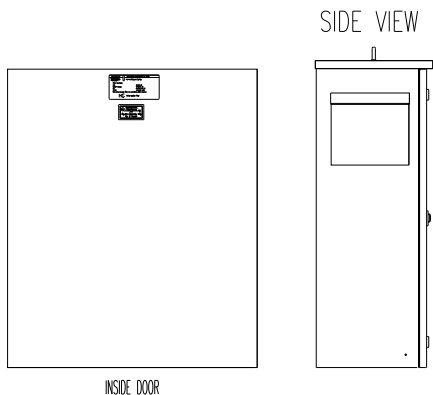
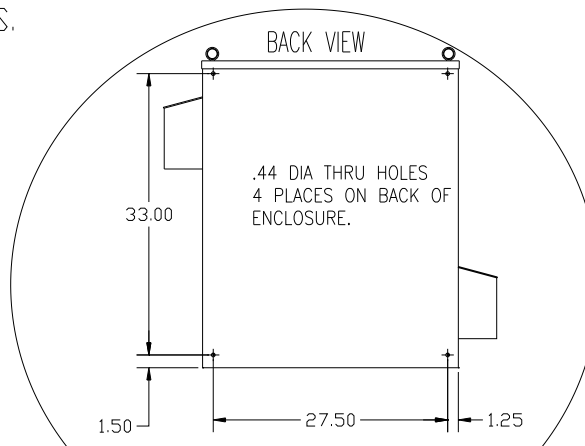


CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26899 FOR SCHEMATIC

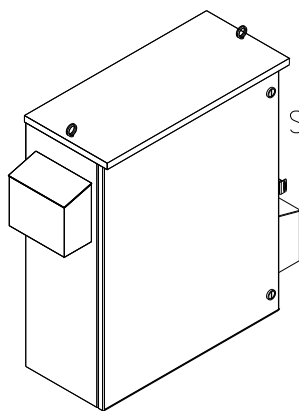

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
6	5TH	240	60	3	20
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS.		190			

HG20BW03STC COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FUS	X
CNT	X

PB-POWER INPUT BLOCK:
 1 AWG thru 4 AWG 35 IN-LBS. MAX.
 6 AWG thru 14 AWG 30 IN-LBS. MAX.
 16 AWG thru 20 AWG 25 IN-LBS. MAX.
 22 AWG 20 IN-LBS. MAX.

GROUND LUG:
 WIRE RANGE TIGHTENING TORQUE.
 1/0-3 AWG. 50 IN-LBS
 4-6 AWG. 45 IN-LBS
 8 AWG. 40 IN-LBS
 10-14 AWG. 35 IN-LBS

				TOLERANCES (EXCEPT AS NOTED)	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .12	HG20BW03STC, 20HP 240/3/60 UL TYPE 3R
				.XXX ± .03	
B 3033 UPDATE LAYOUT 2/26/14 DSW				FRACTIONAL ± 1/32	DRN BY DSW DATE 12/22/08 DWG. NO. 103712DG
A 2641 ADD EYEBOLTS 10/21/09 DSW				ANGULAR ± 1/2°	
NO	REVISION	DATE	BY	SCALE TO FIT	APRVD