
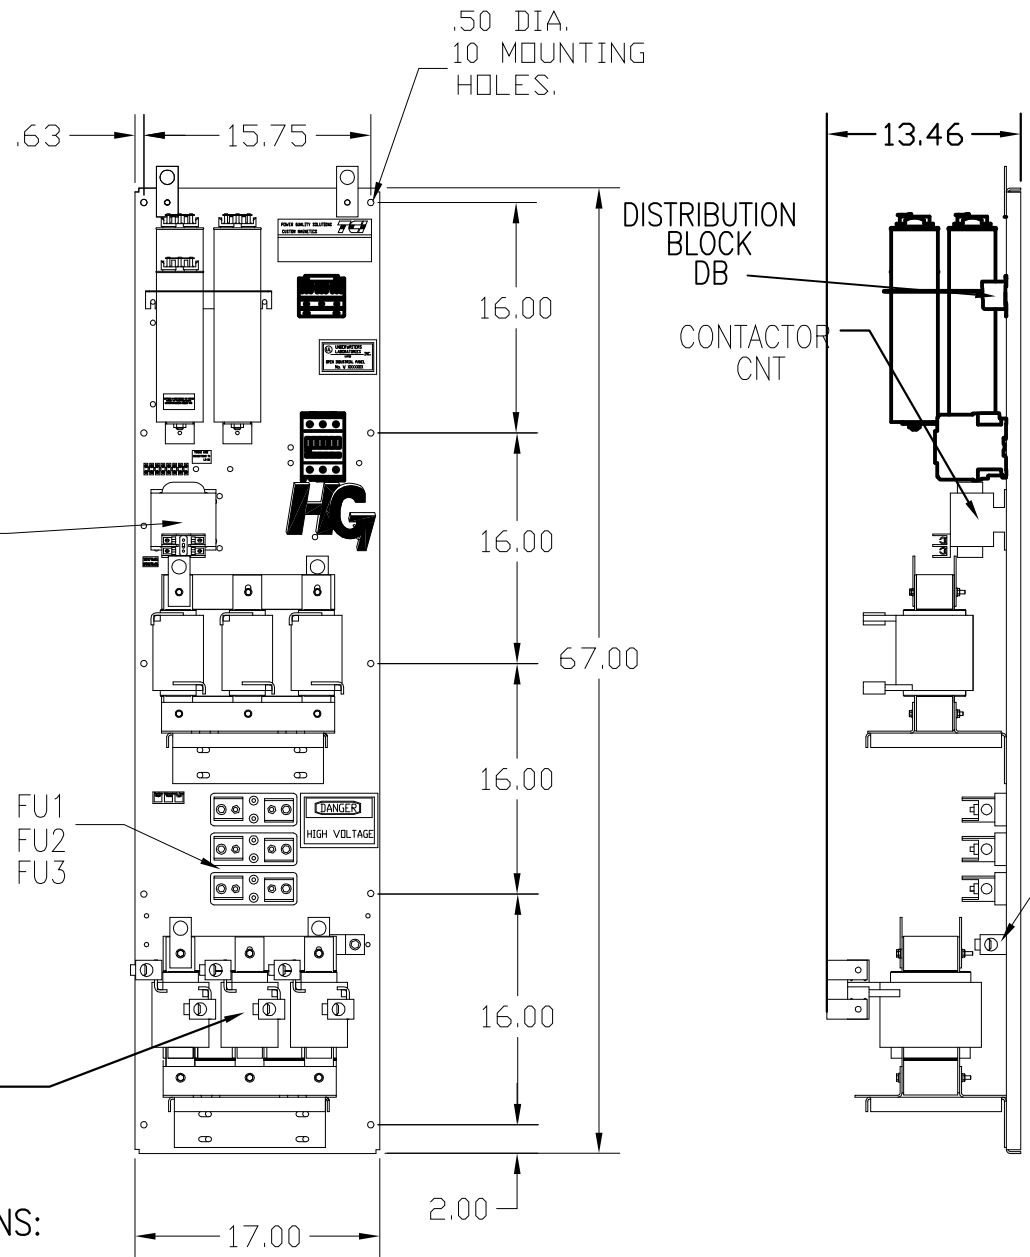


FOR SCHEMATIC SEE DWG# 26879

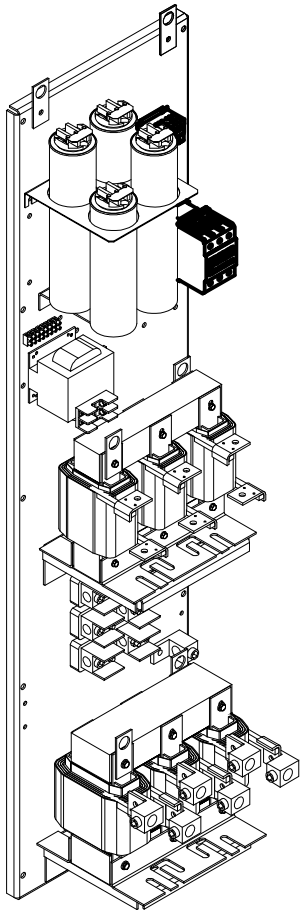

GROUND LUG:
 WIRE RANGE—ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CUSTOMER CONNECTIONS:
 WIRE RANGE—ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
75	5TH	600	60	3	250
OPEN PANEL		WHITE			
FEATURES		WITH CONTACTOR			
APPROX.WT. LBS.		365			
SYMBOL		HG250CW00STC			
LR		X			
TR		X			
(20 KVAR)		X			
(15 KVAR)		X			
Fu1a;2a;3a		X			
Fu4,6		X			
CNT		X			
XFMR		X			
DB		X			

				TOLERANCES (EXCEPT AS NOTED)
				DECIMAL
				.XX ± .03
				.XXX ± .01
				FRACTIONAL
				± 1/32
				ANGULAR
				± 1/2°
NO	REVISION	DATE	BY	
3267	CNT CHANGE	11/4/15	BWM	

TCL W132 N10611 GRANT DRIVE
 GERMANTOWN, WI. 53022

HG250CW00STC, HG7 W/CNT
 250 HP, 600/3/60, OPEN

DRN. BY	DSW	DATE	4/2/09	DWG. NO.	B 103578DG
SCALE	TO FIT	APRVD.			SHT.1 of 1