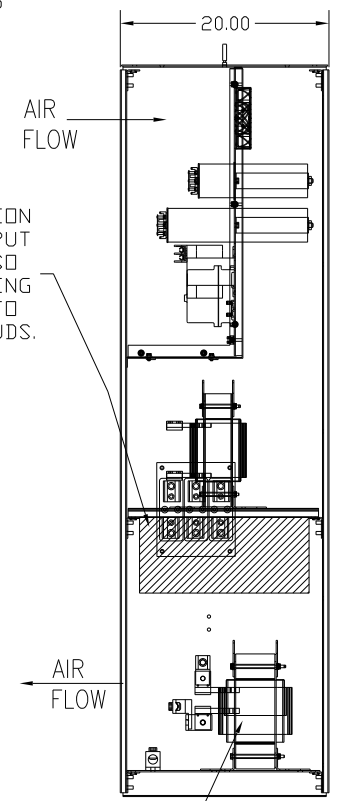
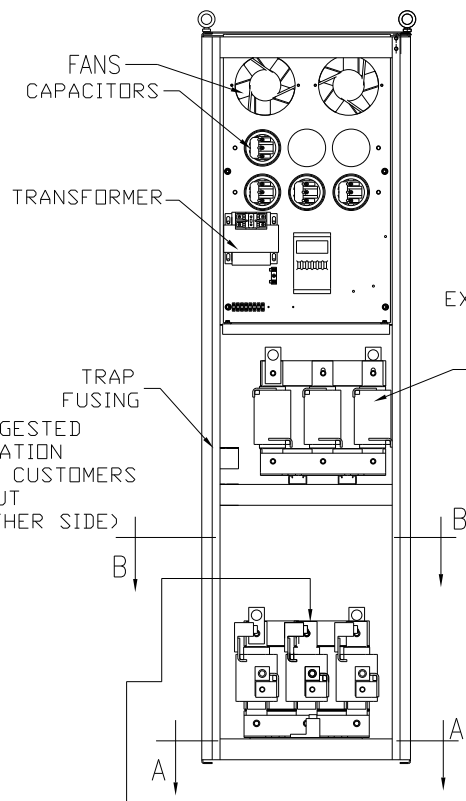
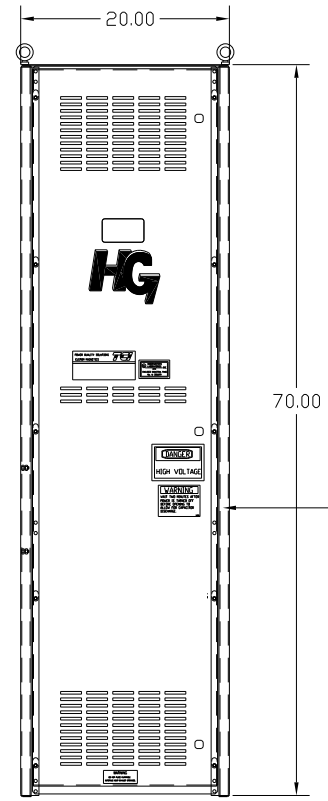


 MOUNTING BAR
 (FOR CUSTOMER MTG
 OF UNIT TO FLOOR)
 SHIP WITH ENCLOSURE.



CUSTOMER CONNECTIONS:



CUSTOMER CONNECTIONS:
 WIRE RANGE-ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:
 WIRE RANGE-ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

SEE DWG# 26973-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
75	5TH	600	60	3	250
ENCLOSURE		NEMA 1			
FEATURES		WITH CONTACTOR			
APPROX.WT. LBS.		515			

SYMBOL	TCI PART NUMBER
LR	KDRS42T
TR	KTR75C65HG
(20 KVAR) 3 PLACES.	KCAP20C6B
(15 KVAR) 1 PLACE.	KCAP15C6B
Fu1a;2a;3a	11305
Fu4,6	24073
Fu5	13362
CNT	19246

TOLERANCES (EXCEPT AS NOTED)		TOL. DECIMAL		TOL. FRACTIONAL		TOL. ANGULAR	
		XX	±.03		± 1/32		± 1/2°
		XXX	±.01				
2786	REMOVE COLOR	11/14/11	DSW				
NO	REVISION	DATE	BY				

TCI	7878 N. 86th STREET MILWAUKEE, WI 53224
HG250CW01STC, CNT 250 HP, 600/3/60, TYPE 1	
DRN. BY DSW	DATE 03/18/09
SCALE TO FIT	APRVD C
	DWG. NO. 103558dg
	SHT. 1 OF 1