


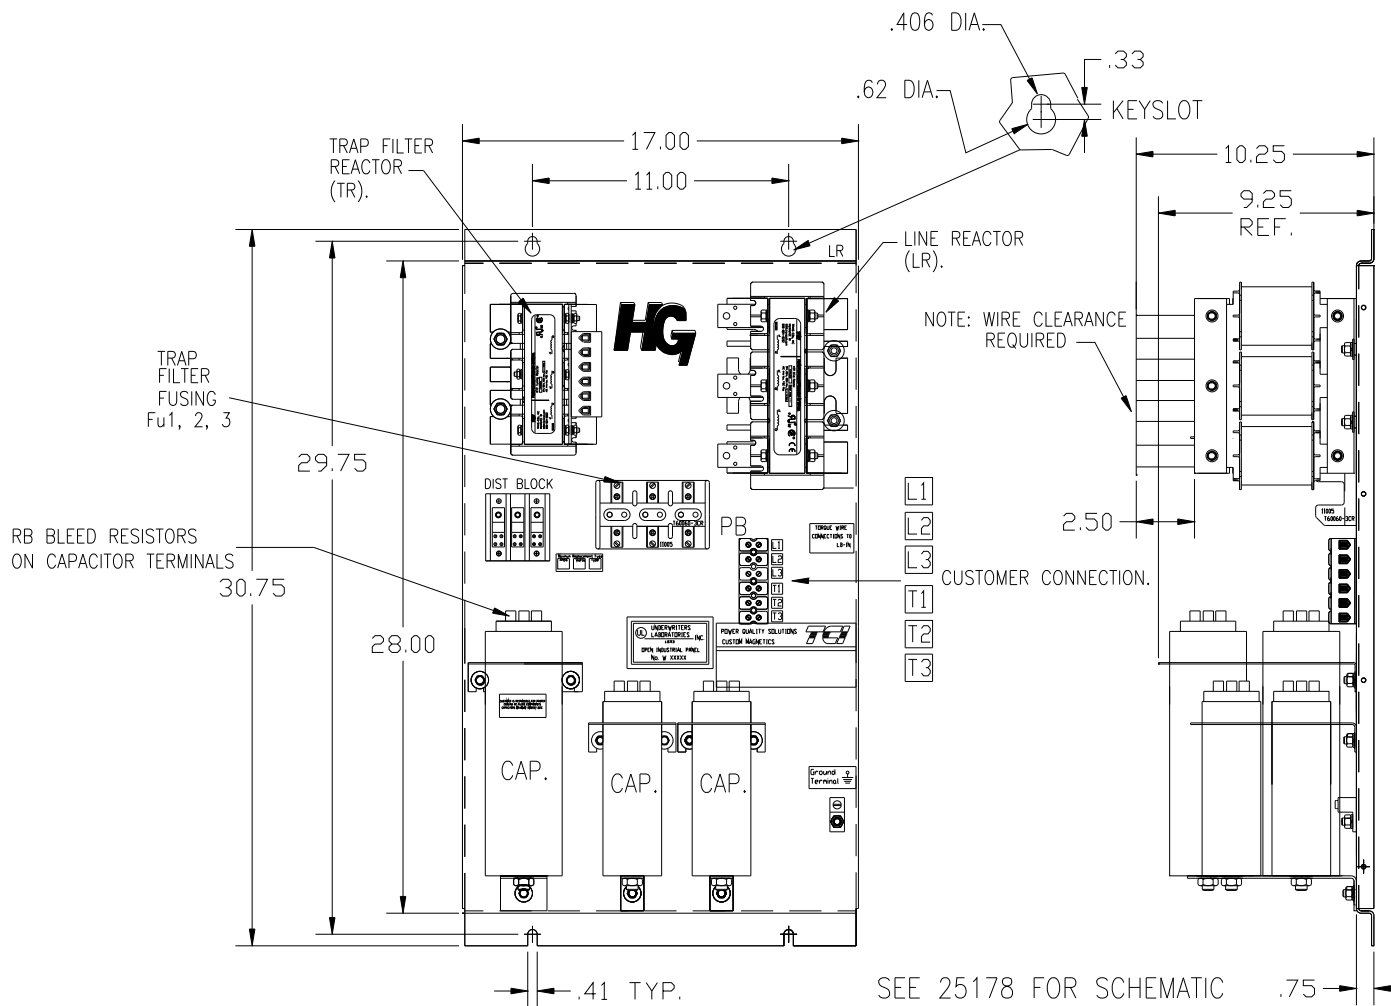

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
8	5TH	240	60	3	25
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		85			

HG25BW00ST		
COMPONENTS		
LINE REACTOR	LR	X
TRAP REACTOR	TR	X
CAPACITOR	CAP	X
TRAP FUSING	FU1,2,3	X

WIRE SIZE (AWG)	RATED TORQUE (IN-LBS)
2/0-3	50
4-6	45
8	40
10-14	35

CUSTOMER CONNECTIONS
 L1 L2 L3 T1 T2 T3
 AND GROUND LUG.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

SEE 25178 FOR SCHEMATIC

				TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224		
				DECIMAL			
C	3042 LUG TORQ CHG	2/20/14	BMZ	.XX ± .03	HG25BW00ST, HG7 STANDARD 25 HP, 240/3/60, OPEN		
B	2897 ADD DIST BLK	1/29/13	DSW	.XXX ± .01			
A	2516, CAP WAS 16446			FRACTIONAL ± 1/32			
	CAP WAS 16448	9/30/07	RJC	ANGULAR ± 1/2°	DRN BY DSW	DATE 04/13/05	DWG NO 102512DG
NO	REVISION	DATE	BY		SCALE TO FIT	APPRD.	SHT.1 OF1