



UNIT SPECIFICATIONS:				
KVAR	HARMONIC	VOLT	HZ	PHASE HP
90	5TH	480	60	3 300
ENCLOSURE		UL TYPE 3R-COLOR WHITE		
APPROX.WT. LBS.		615		

SEE DWG# 26757 FOR SCHEMATIC
See IOM Manual For Wire Range And Torques.

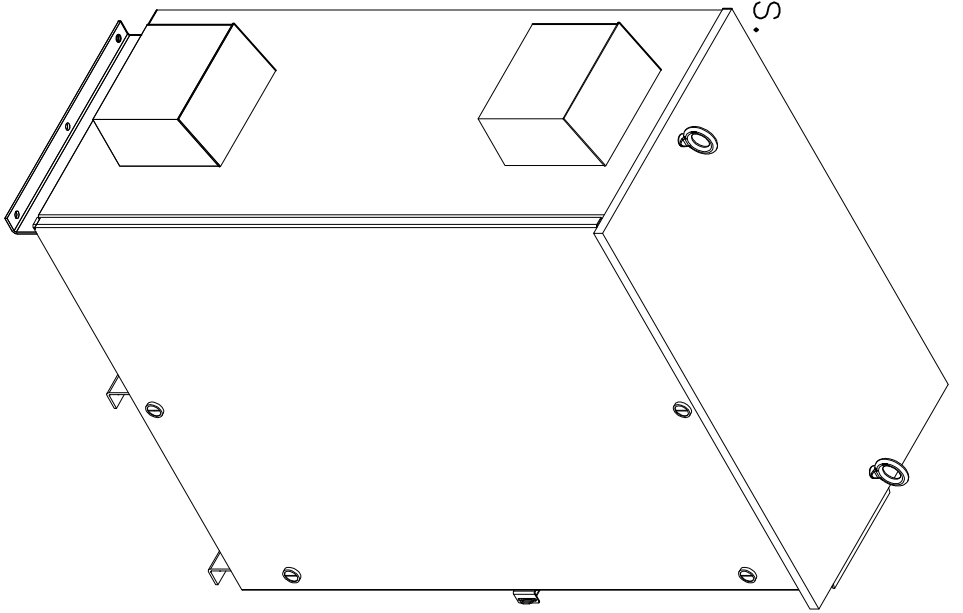



ALTERNATE RAIN HOOD
CONSTRUCTION

HASP AND STAPLE
WITH 4 1/4 TURN LATCHES




ALTERNATE PAD LOCKING


WING KNOB
WITH 2 1/4 TURN LATCHES

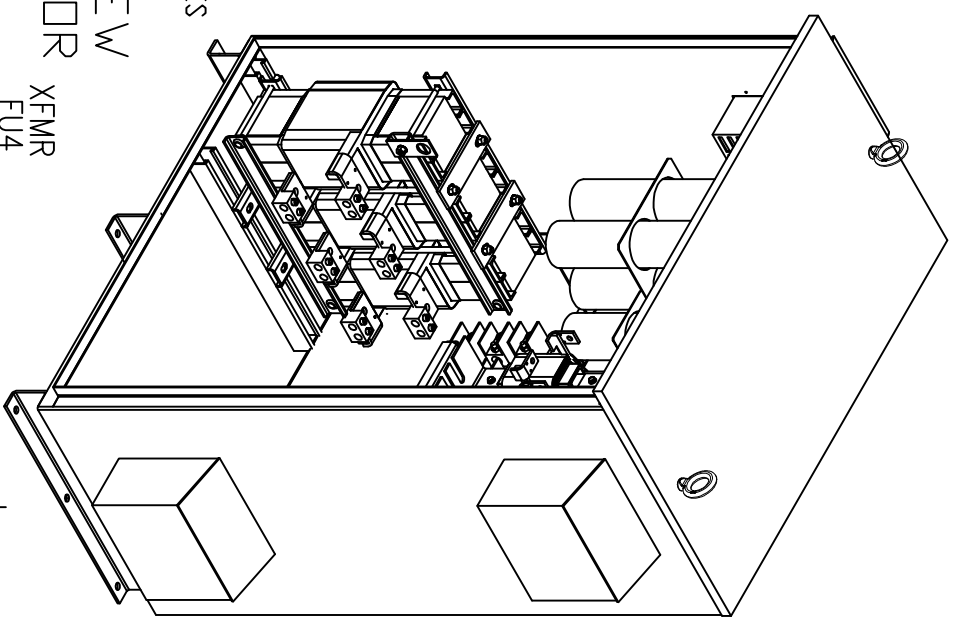


FRONT VIEW
WITHOUT DOOR

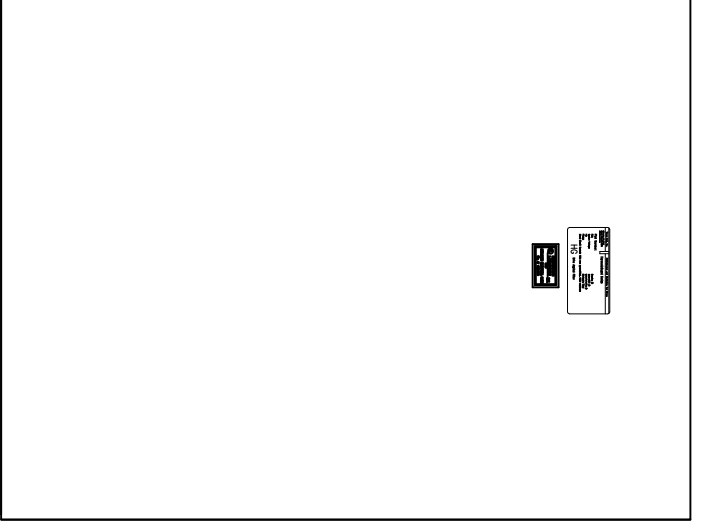


INSIDE DOOR

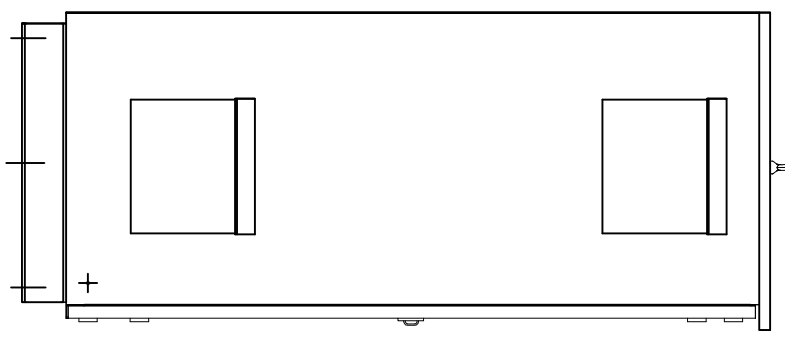


SIDE VIEW

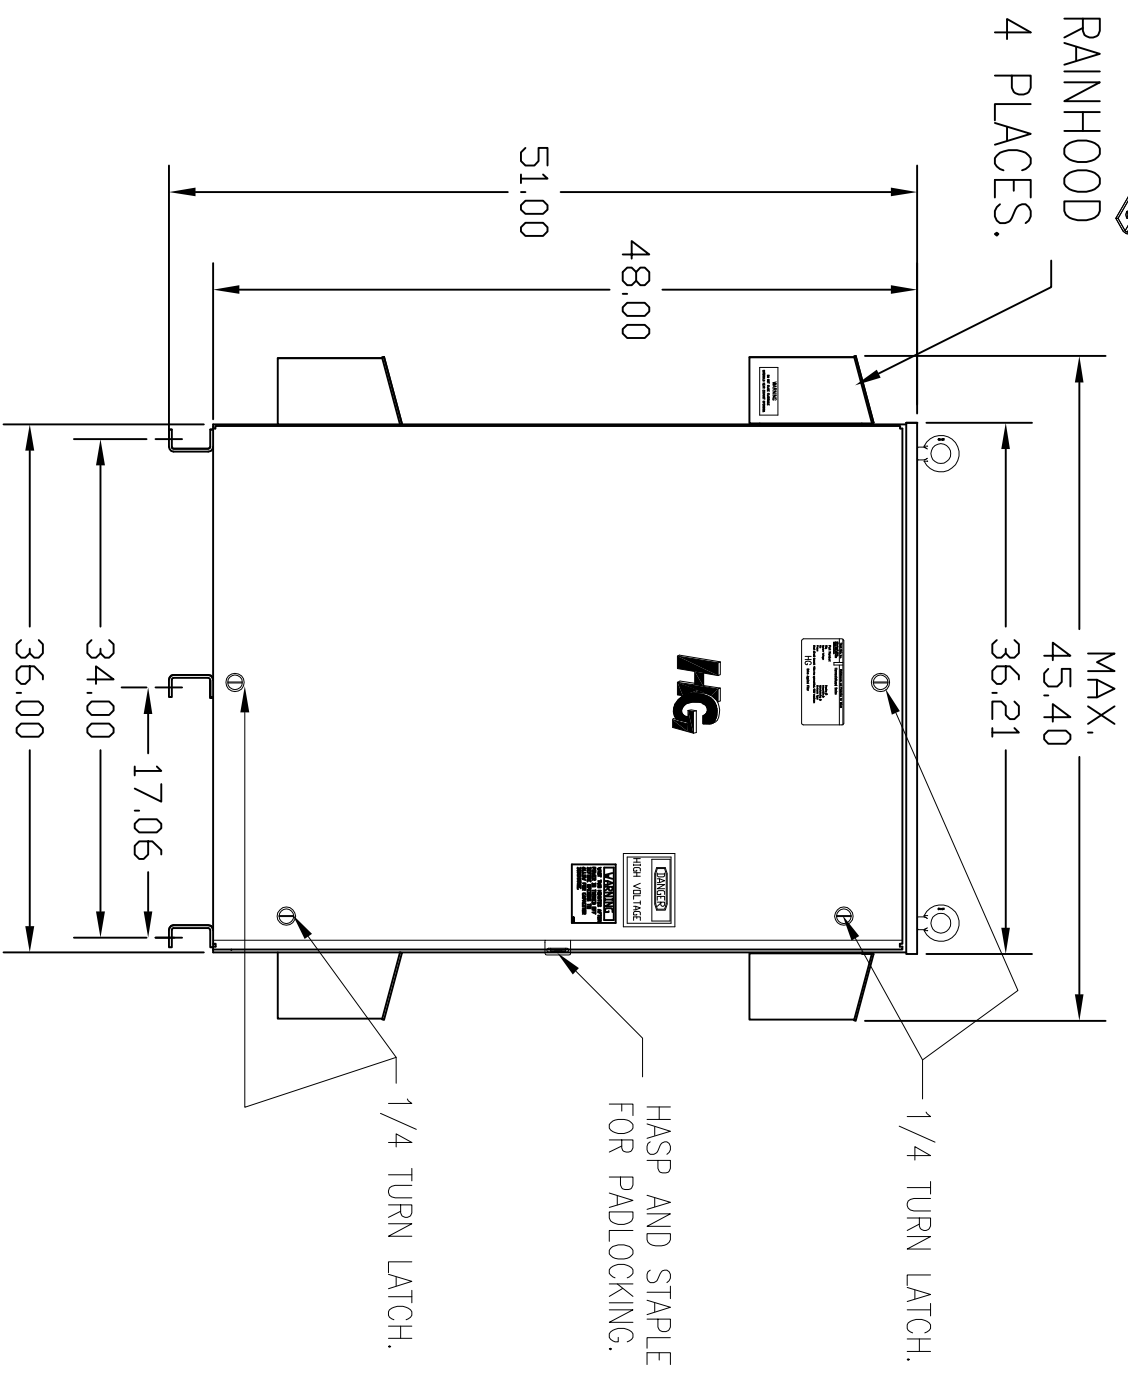

FRONT VIEW
WITH DOOR

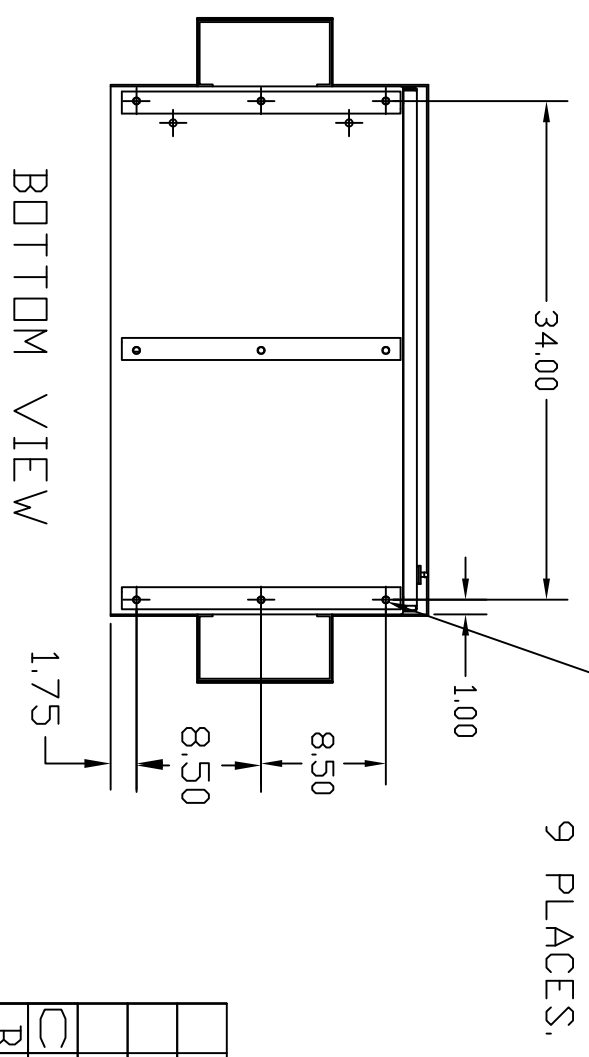

BOTTOM VIEW

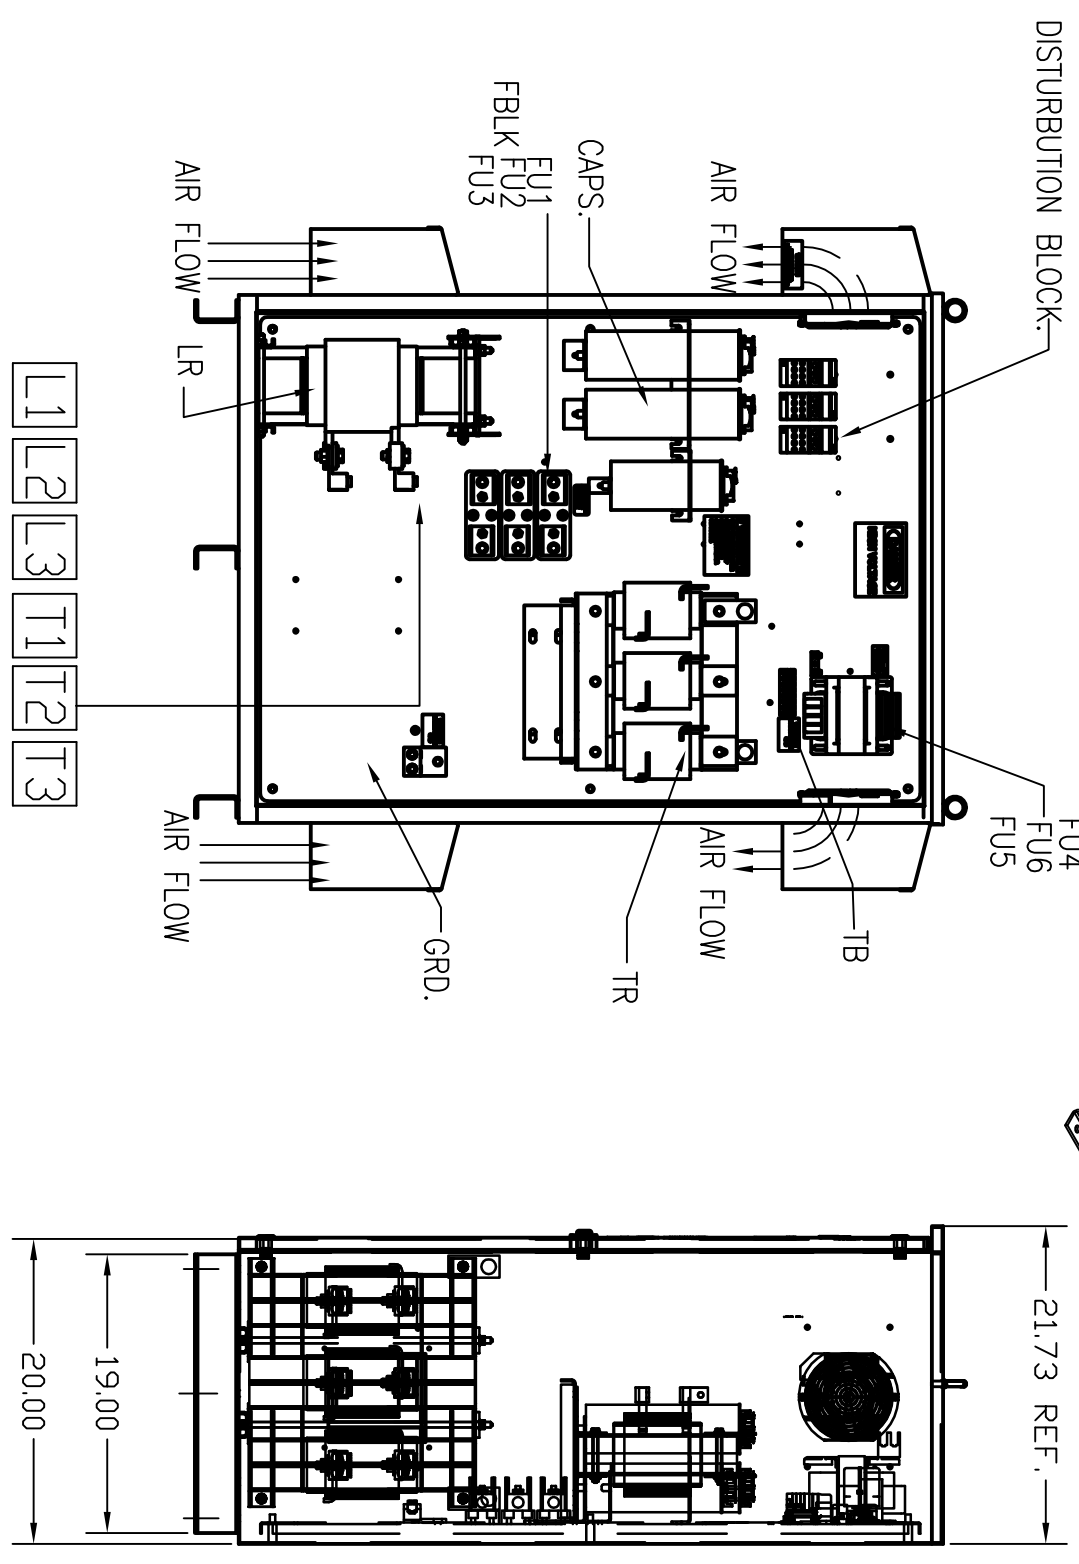

SUGGESTED CUSTOMER WIRE ENTRY
AND EXIT LOCATION

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.
CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

TOLERANCES (EXCEPT AS NOTED)		TOL. DECIMAL		TOL. FRACTIONAL		TOL. ANGULAR		SCALE TO FIT	
		XX ± .12		.XXX ± .06		± 1/32		SCALE TO FIT	
C	3147 ALT. HOOD/LATCH	8/11/14	BMZ					DATE	BY
B	2900 CHG TO ASC CAPS	3/6/13	DSW					DATE	BY
A	2641 ADD EYEBOLTS	10/13/09	DSW					DATE	BY
ND								REVISION	



HG300AW03ST, 300HP
480/3/60 UL TYPE 3R

DRN BY DSW DATE 09/15/08 DWG. NO. 103625DG
SCALE TO FIT APPVD. SH1.1 OF1