
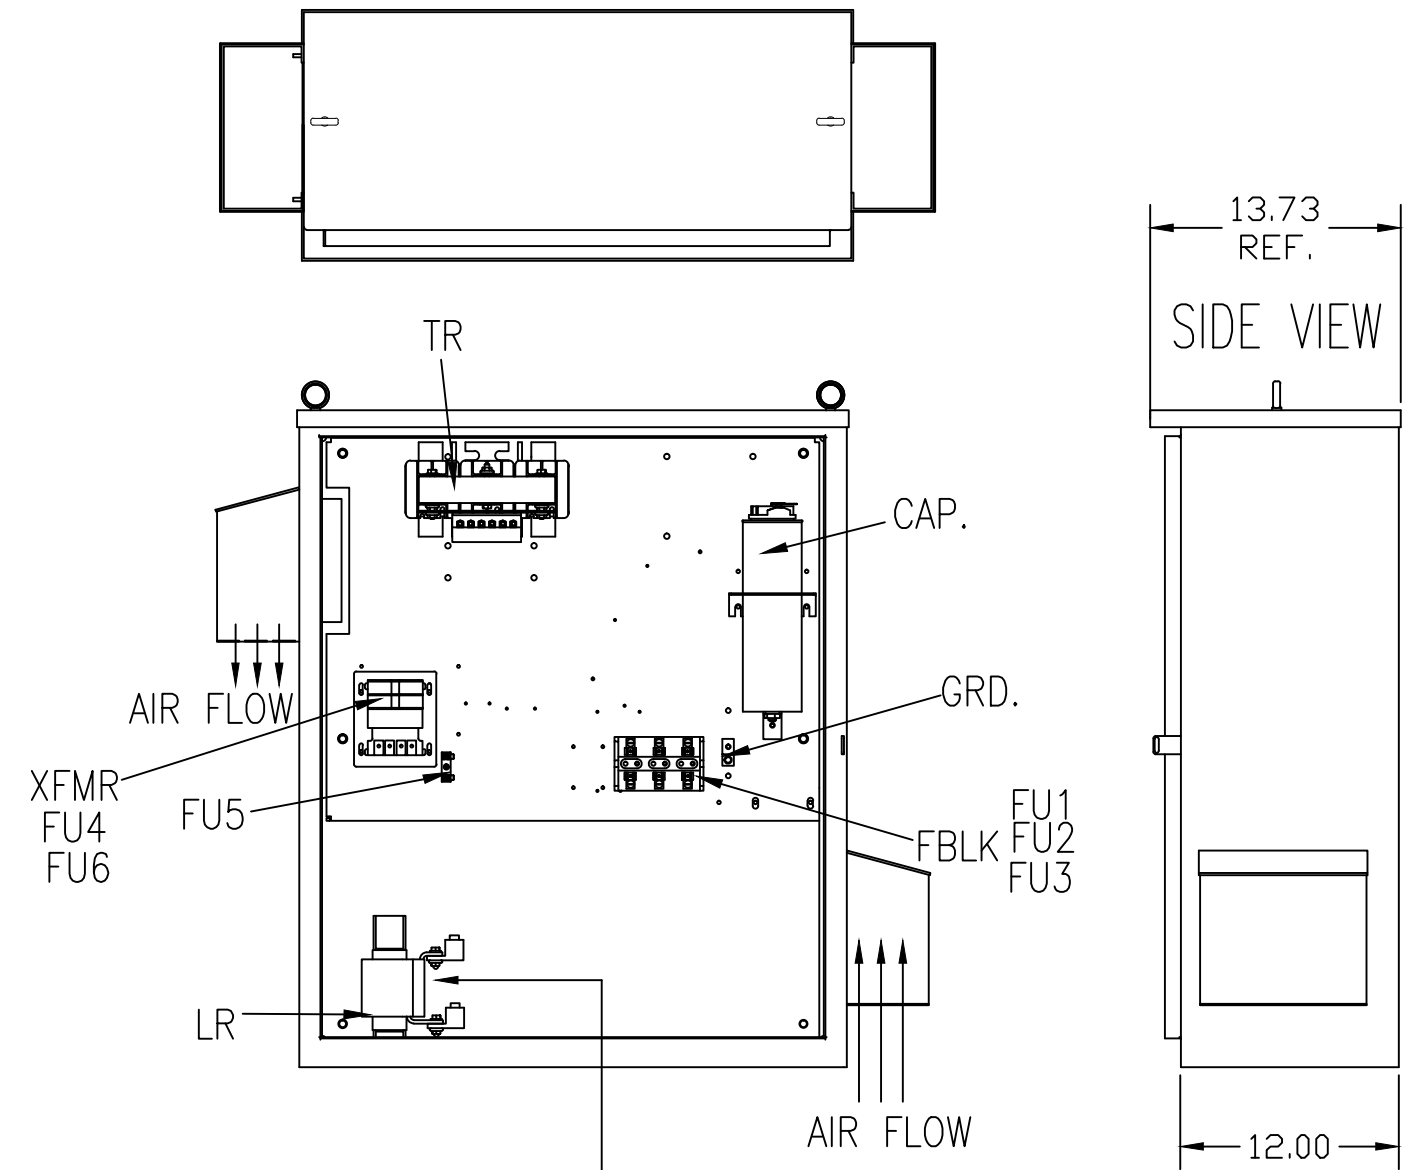
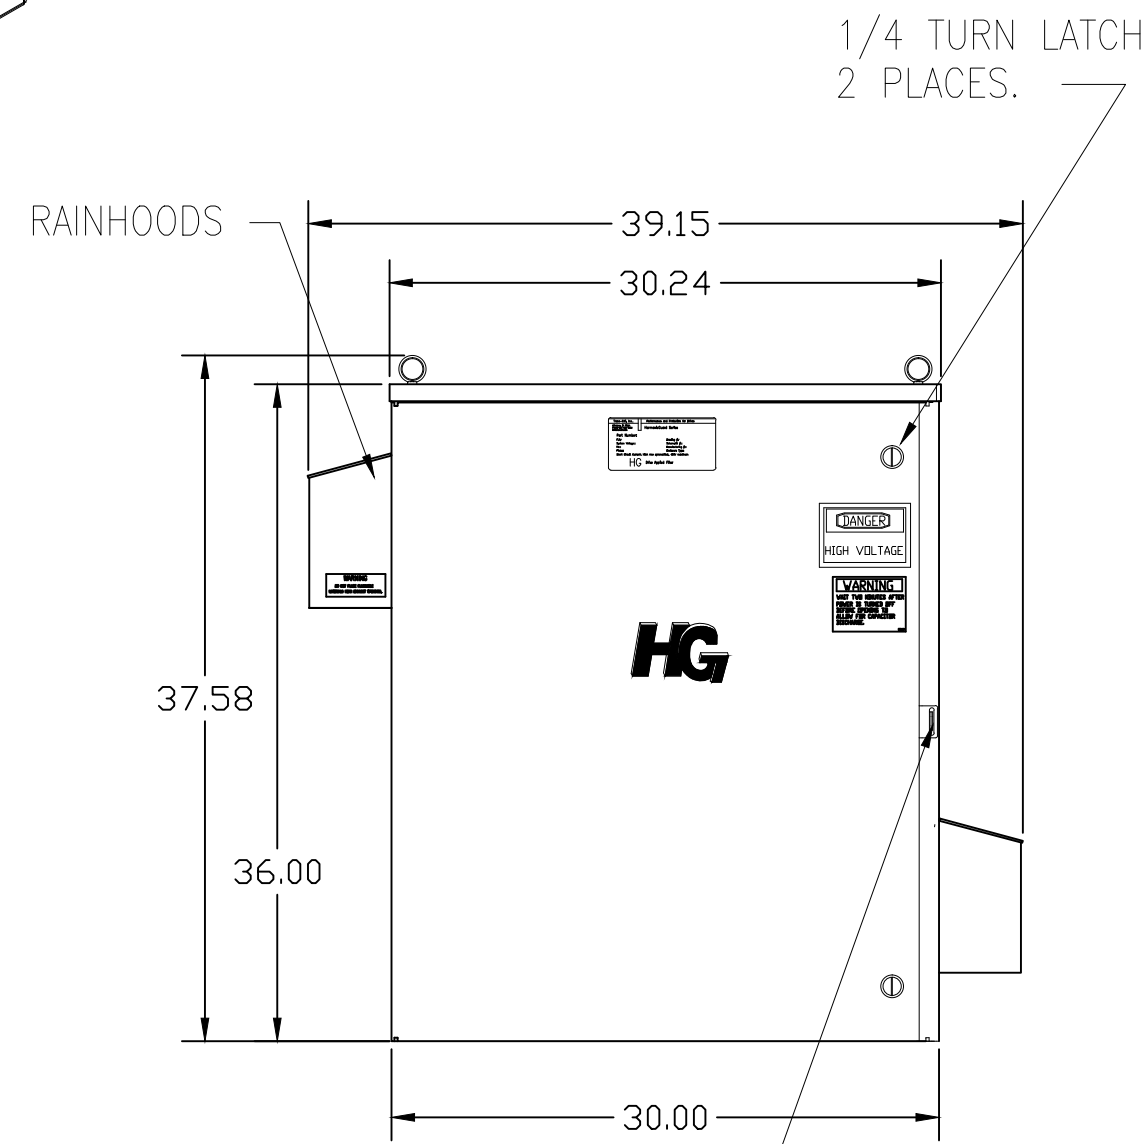
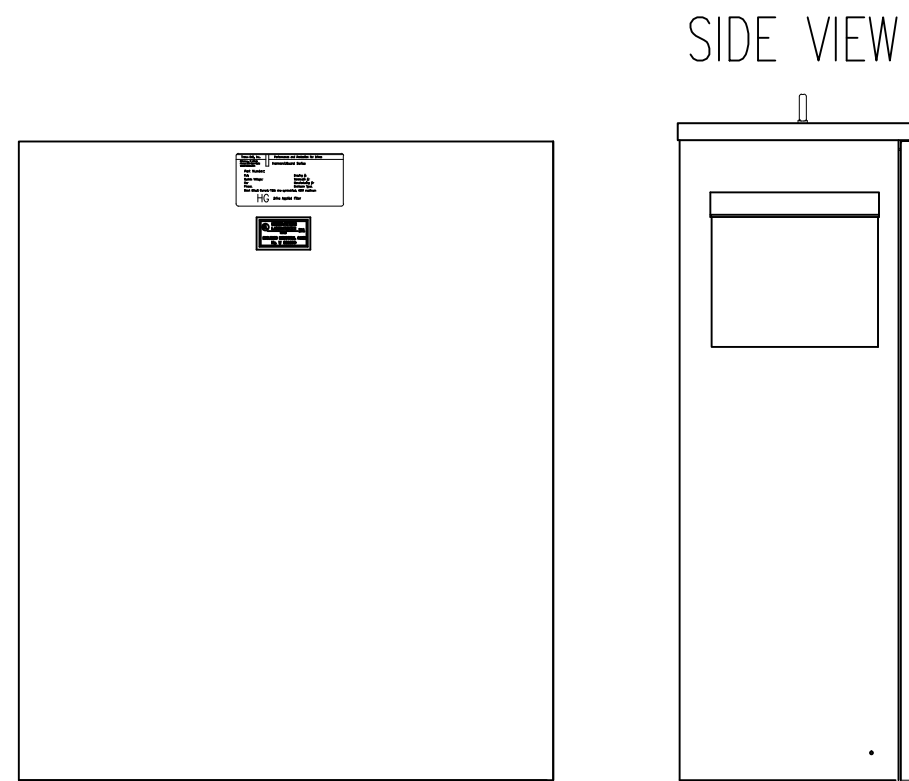
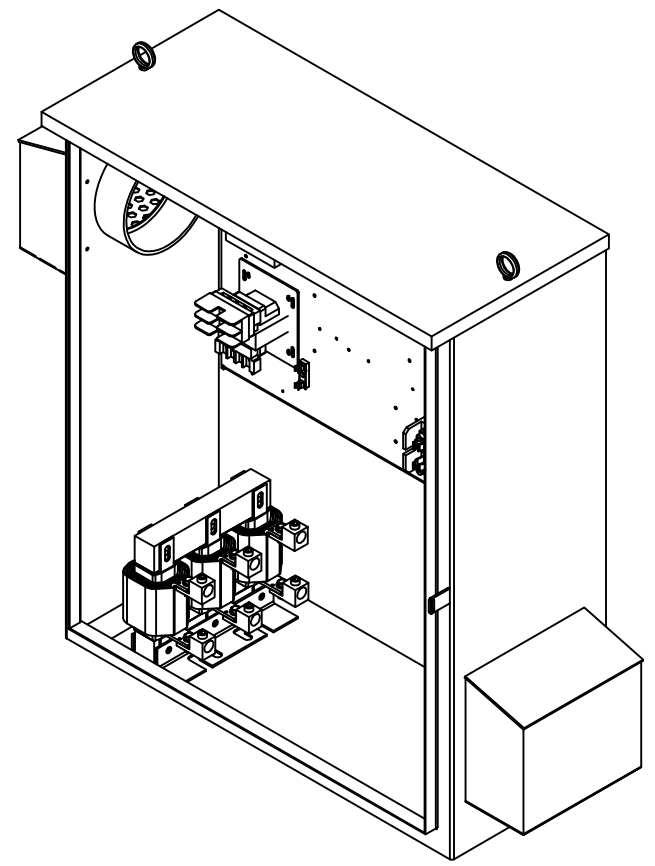
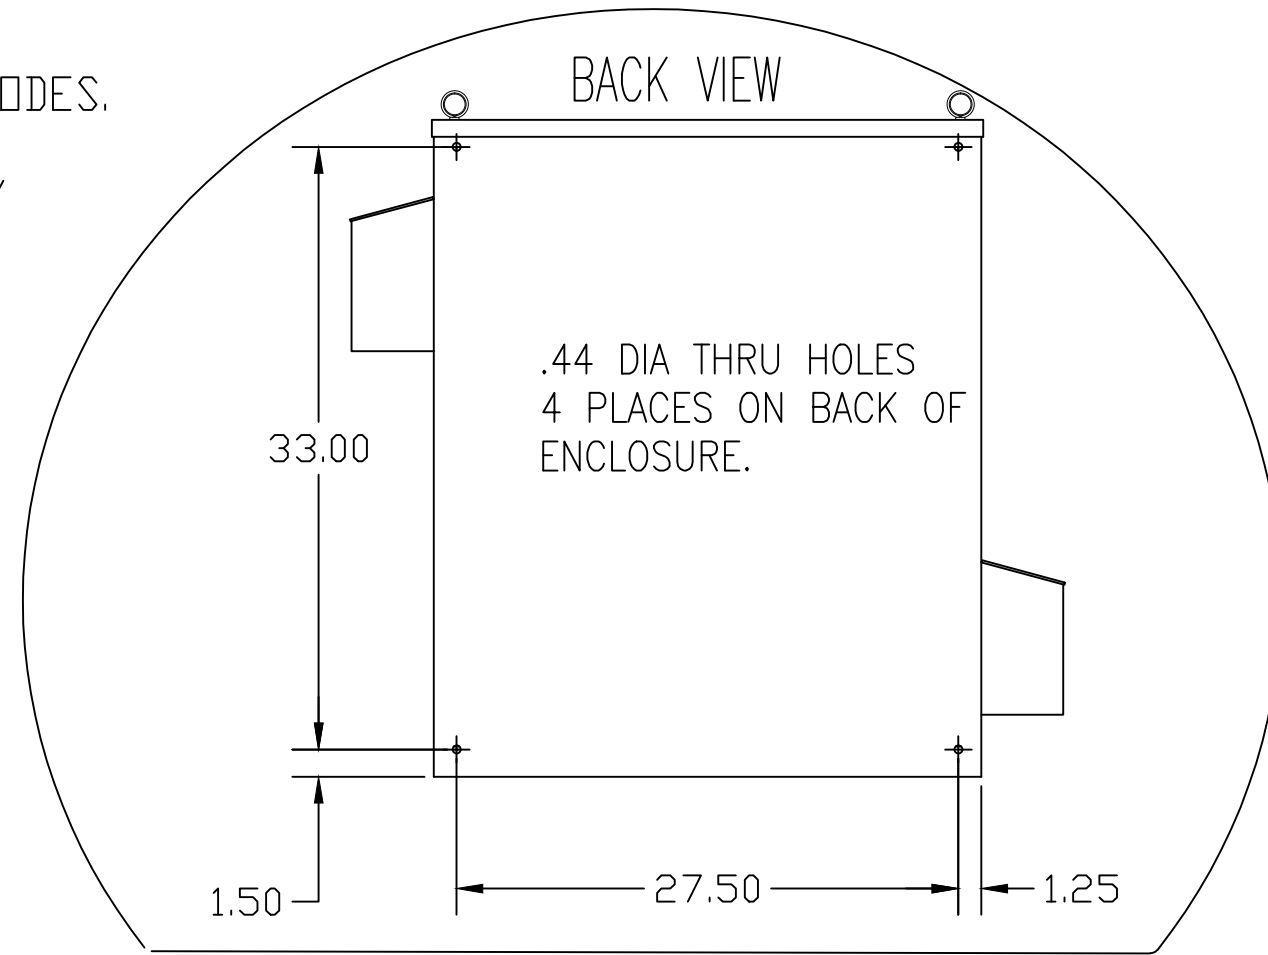


CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.
SEE DWG# 26902 FOR SCHEMATIC

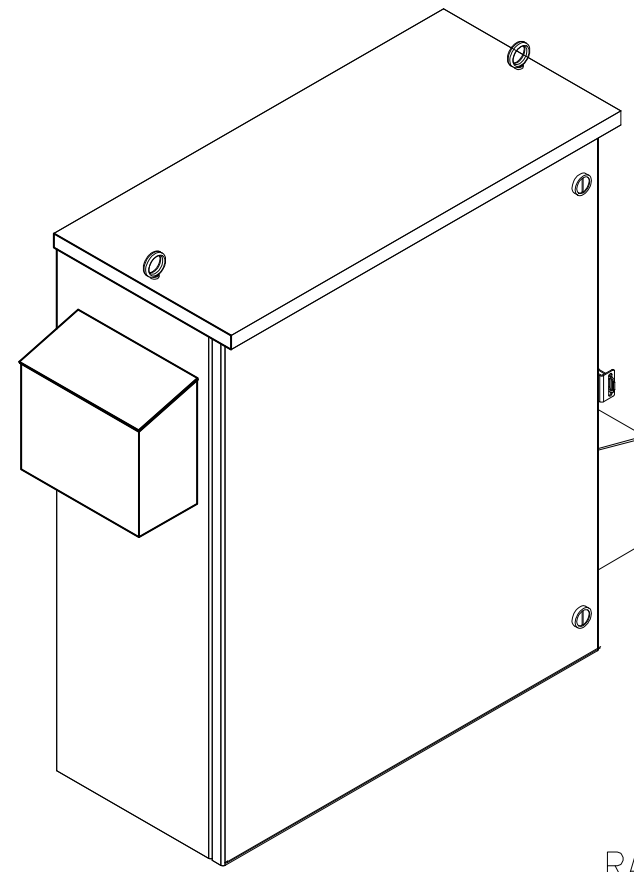

L1 L2 L3 T1 T2 T3
SUGGESTED CUSTOMER WIRE ENTRY AND EXIT LOCATION

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
10	5TH	240	60	3	30
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
APPROX.WT. LBS.		197			

HG30BW03ST	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FU5	X

WIRE SIZE (AWG)	RATED TORQUE (IN-LBS)
2/0-3	50
4-6	45
8	40
10-14	35

TOLERANCES (EXCEPT AS NOTED)

DECIMAL .XX ±.12 .XXX±.03

FRACTIONAL ± 1/32

ANGULAR ± 1/2°

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.

3033 UPDATE LAYOUT 2/24/14 DSW

NO REVISION DATE BY

SCALE TO FIT SIZE C

TOLERANCES (EXCEPT AS NOTED)

DECIMAL .XX ±.12 .XXX±.03

FRACTIONAL ± 1/32

ANGULAR ± 1/2°

TCI® W132 N10611 Grant Drive Germantown, WI 53022

HG30BW03ST, 30HP
240/3/60 UL TYPE 3R

DRN. BY DSW DATE 12/22/08 DWG. NO. 103659DG

SCALE TO FIT SIZE C

SHT. 1 OF 1