



CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.








NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.
SEE DWG# 26898 FOR SCHEMATIC

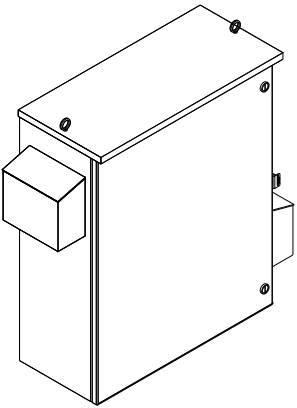

SIDE VIEW



INSIDE DOOR

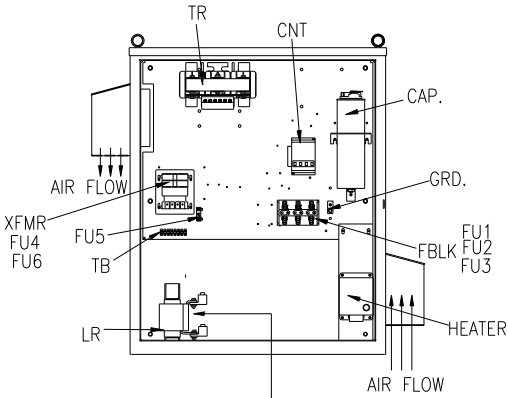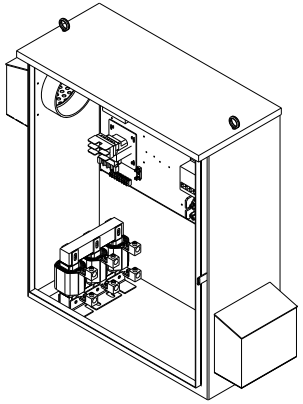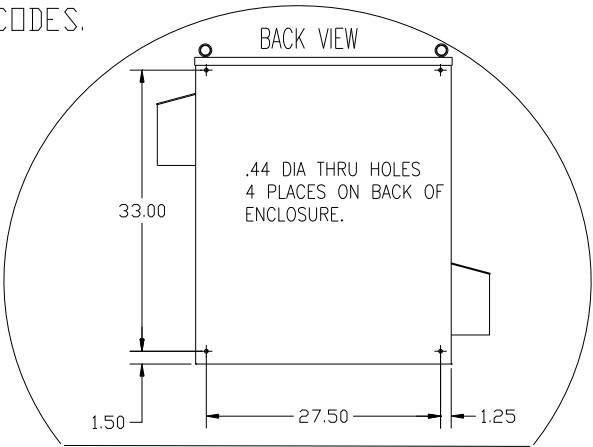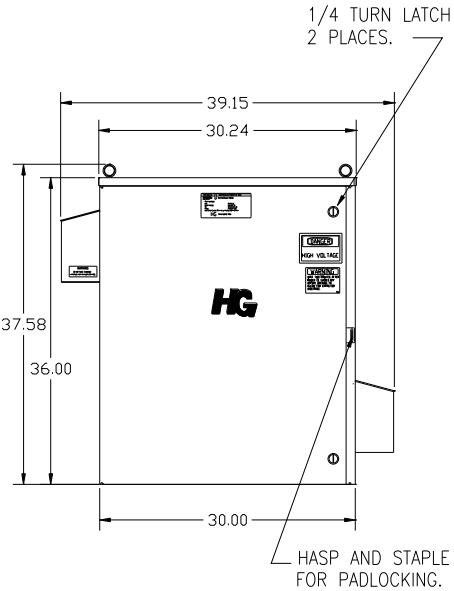


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
10	5TH	240	60	3	30
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX.WT. LBS.		205			

HG40CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
TRANSFORMER XFMR	X
TRANSFORMER FUSING FU4,6	X
TRANSFORMER FUSING FU5	X
CONTACTOR CNT	X
HEATER	X

CUSTOMER CONNECTIONS

L1 L2 L3 T1 T2 T3
AND GROUND LUG.

WIRE SIZE (AWG)	RATED TORQUE (IN-LBS)
2/0-3	50
4-6	45
8	40
10-14	35

					TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
					DECIMAL	
					.XX ±.12 .XXX±.03	
					FRACTIONAL ± 1/32	
C	3033	UPDATE LAYOUT	2/24/14	DSW	ANGULAR ± 1/2°	NO
		REVISION	DATE	BY	SCALE	TO FIT
					12/16/08	DSW
					APPROV.	C 103769DG
						SHT. 1 of 1