


UNIT SPECIFICATIONS:	
KVAR HARMONIC	VOLT HZ PHASE HP
105 5TH	600 60 3 350
ENCLOSURE	NEMA 1
FEATURES	WITH CONTACTOR
APPROX.WT. LBS.	735
SYMBOL	TCI PART NUMBER
LR	KDRX42T
TR	KTR105C65HG
(20 KVAR) 4 PLACES.	KCAP20C6B
(15 KVAR) 1 PLACE.	KCAP15C6B
(10 KVAR) 1 PLACE.	KCAP10C6B
Fu1a;2a;3a	13333
Fu4,6	24390
Fu5	23977
CNT	19246

CUSTOMER CONNECTIONS:
 L1 L2 L3
 T1 T2 T3

CUSTOMER CONNECTIONS:
 WIRE RANGE-TWO 350MCM-4
 TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
 WIRE RANGE-ONE 600MCM-4
 TWO 250MCM-1/0
 TIGHTENING TORQUE 500 IN-LB.

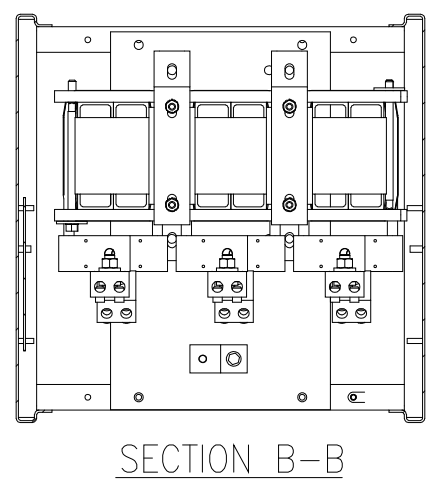

SEE DWG# 26973-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED)		TCI® W132 N10611 Grant Drive Germantown, WI 53022	
				DECIMAL			
				.XX ±.03			
				.XXX±.01			
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1/2°			
4077	COLOR REMOVED	7/25/17	JRN			DRN BY DSW DATE 03/18/09 DWG. NO. 103560DG	
NO	REVISION	DATE	BY			SCALE TO FIT APRVD. C SHT.1 of 1	