


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
120	5TH	480	60	3	400
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		680			
SYMBOL		TCI PART NUMBER			
LR		KDRX3T			
TR		KTR120A65HG			
CAP1-6 (20KVAR)		23123			
Fu1, 2, 3		12462			

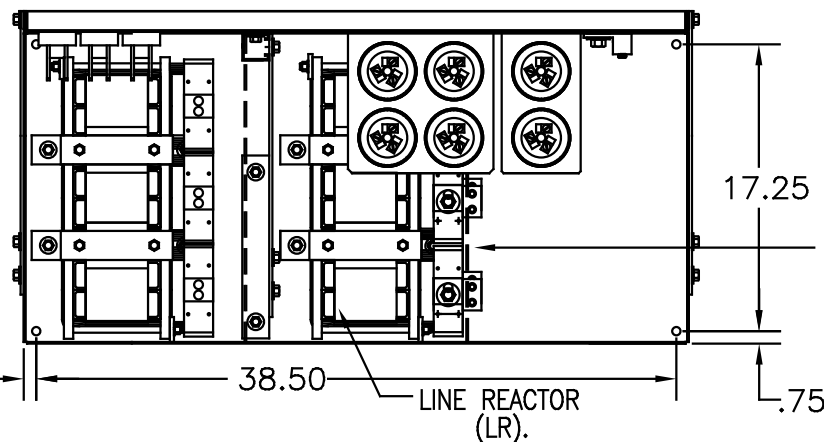

CUSTOMER CONNECTIONS:  
 L1 L2 L3  
 T1 T2 T3

SEE 25078 FOR SCHEMATIC




CUSTOMER CONNECTIONS:  
 WIRE RANGE-TWO 350MCM-4

TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:

WIRE RANGE-TWO 350MCM-4

TIGHTENING TORQUE 275 IN-LB.

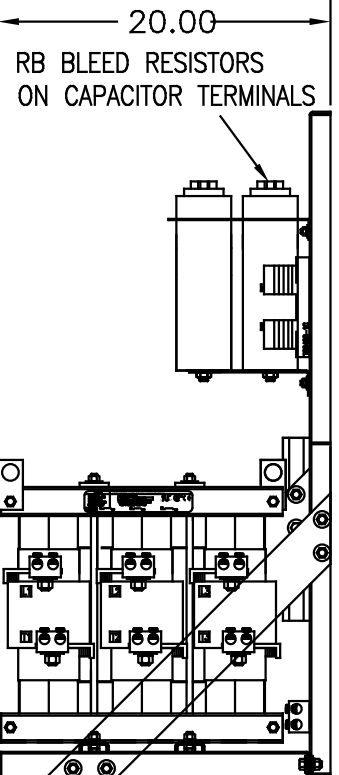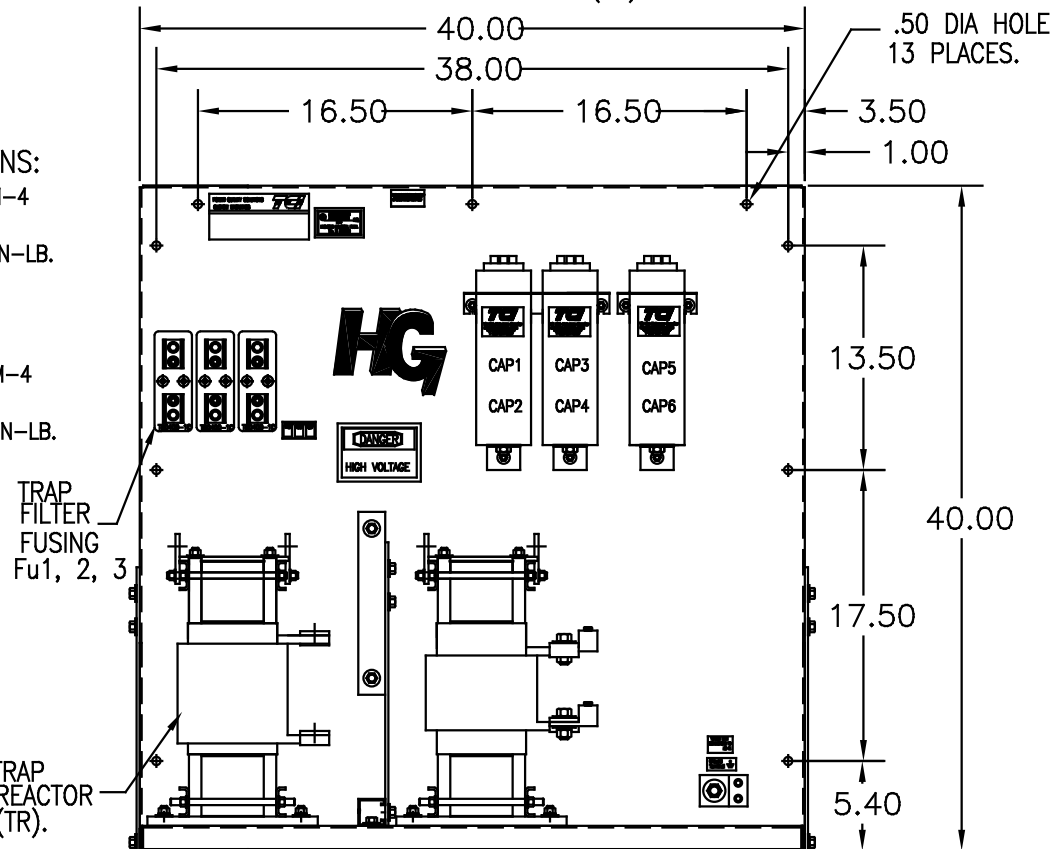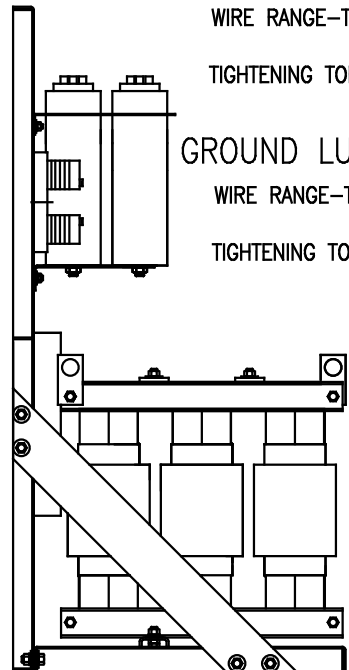

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY	TOLERANCES (UNLESS AS NOTED)	DESIGN
				.XX ±.03	
				.XXX±.01	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	

7878 N. 86th STREET MILWAUKEE, WI 53224	
HG400AW00ST HG7 STANDARD 400HP, 480/3/60 OPEN	
DESIGNED BY DSW	DATE 05/12/09
DRAWN BY DSW	CHECKED BY C
SCALE TO FIT	PART NO. 102680DG
SHIT. 1 OF 1	