



APPROX WEIGHT: 570 LBS

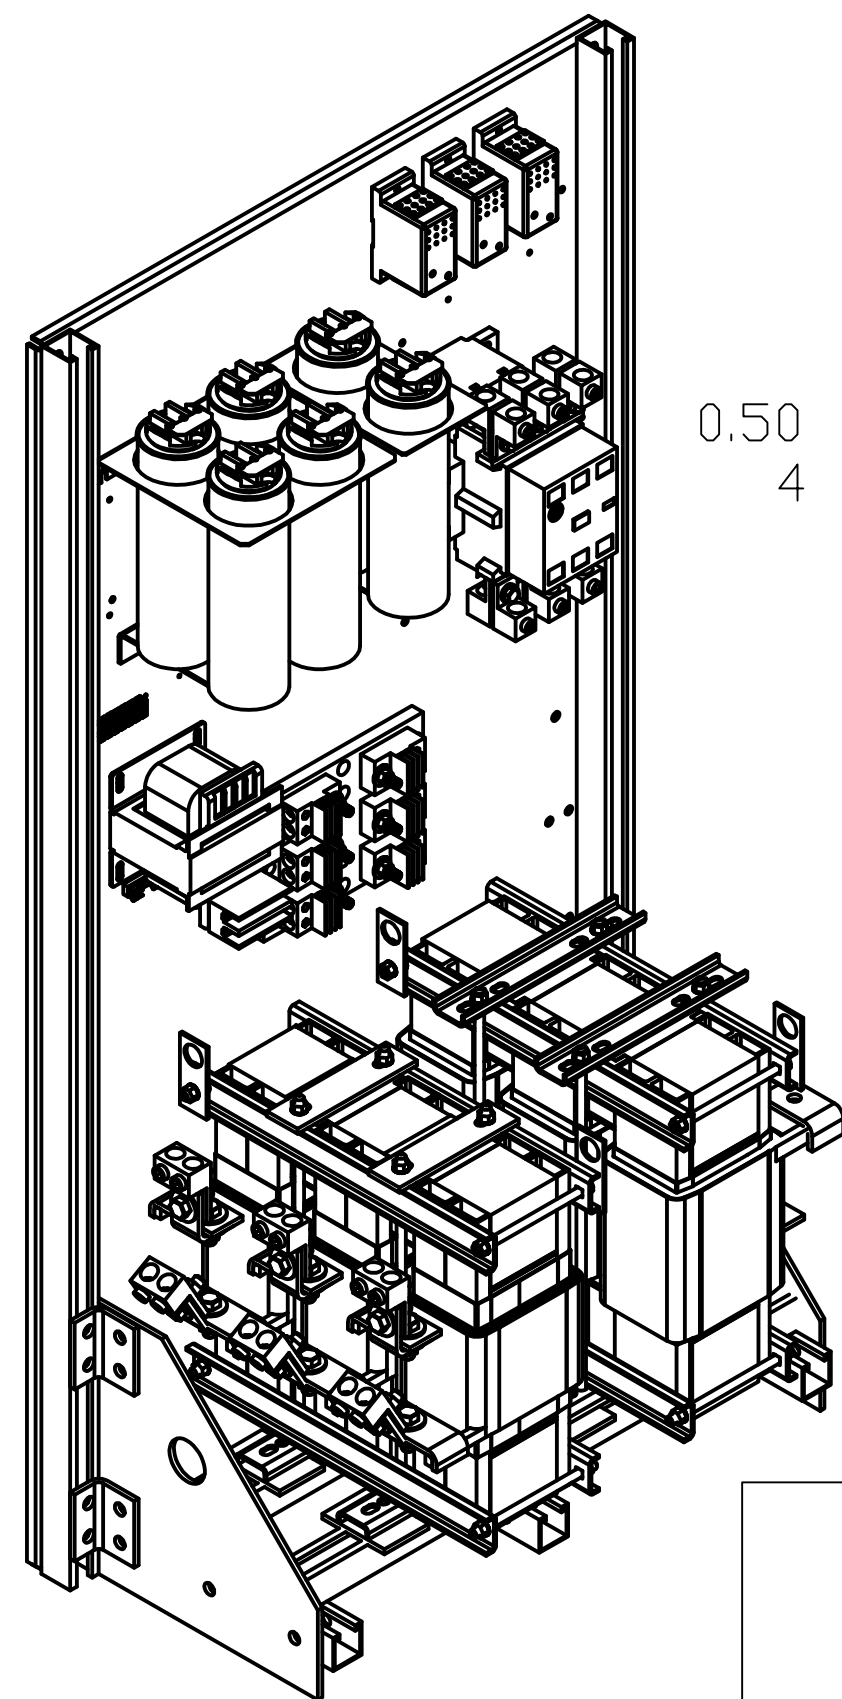

0.50 DIA HOLES
4 PLACES.

L1	L2	L3
T1	T2	T3

CUSTOMER OUTPUT CONNECTION
WIRE RANGE—TWO 350MCM—4
TIGHTENING TORQUE 275 IN.-LB.


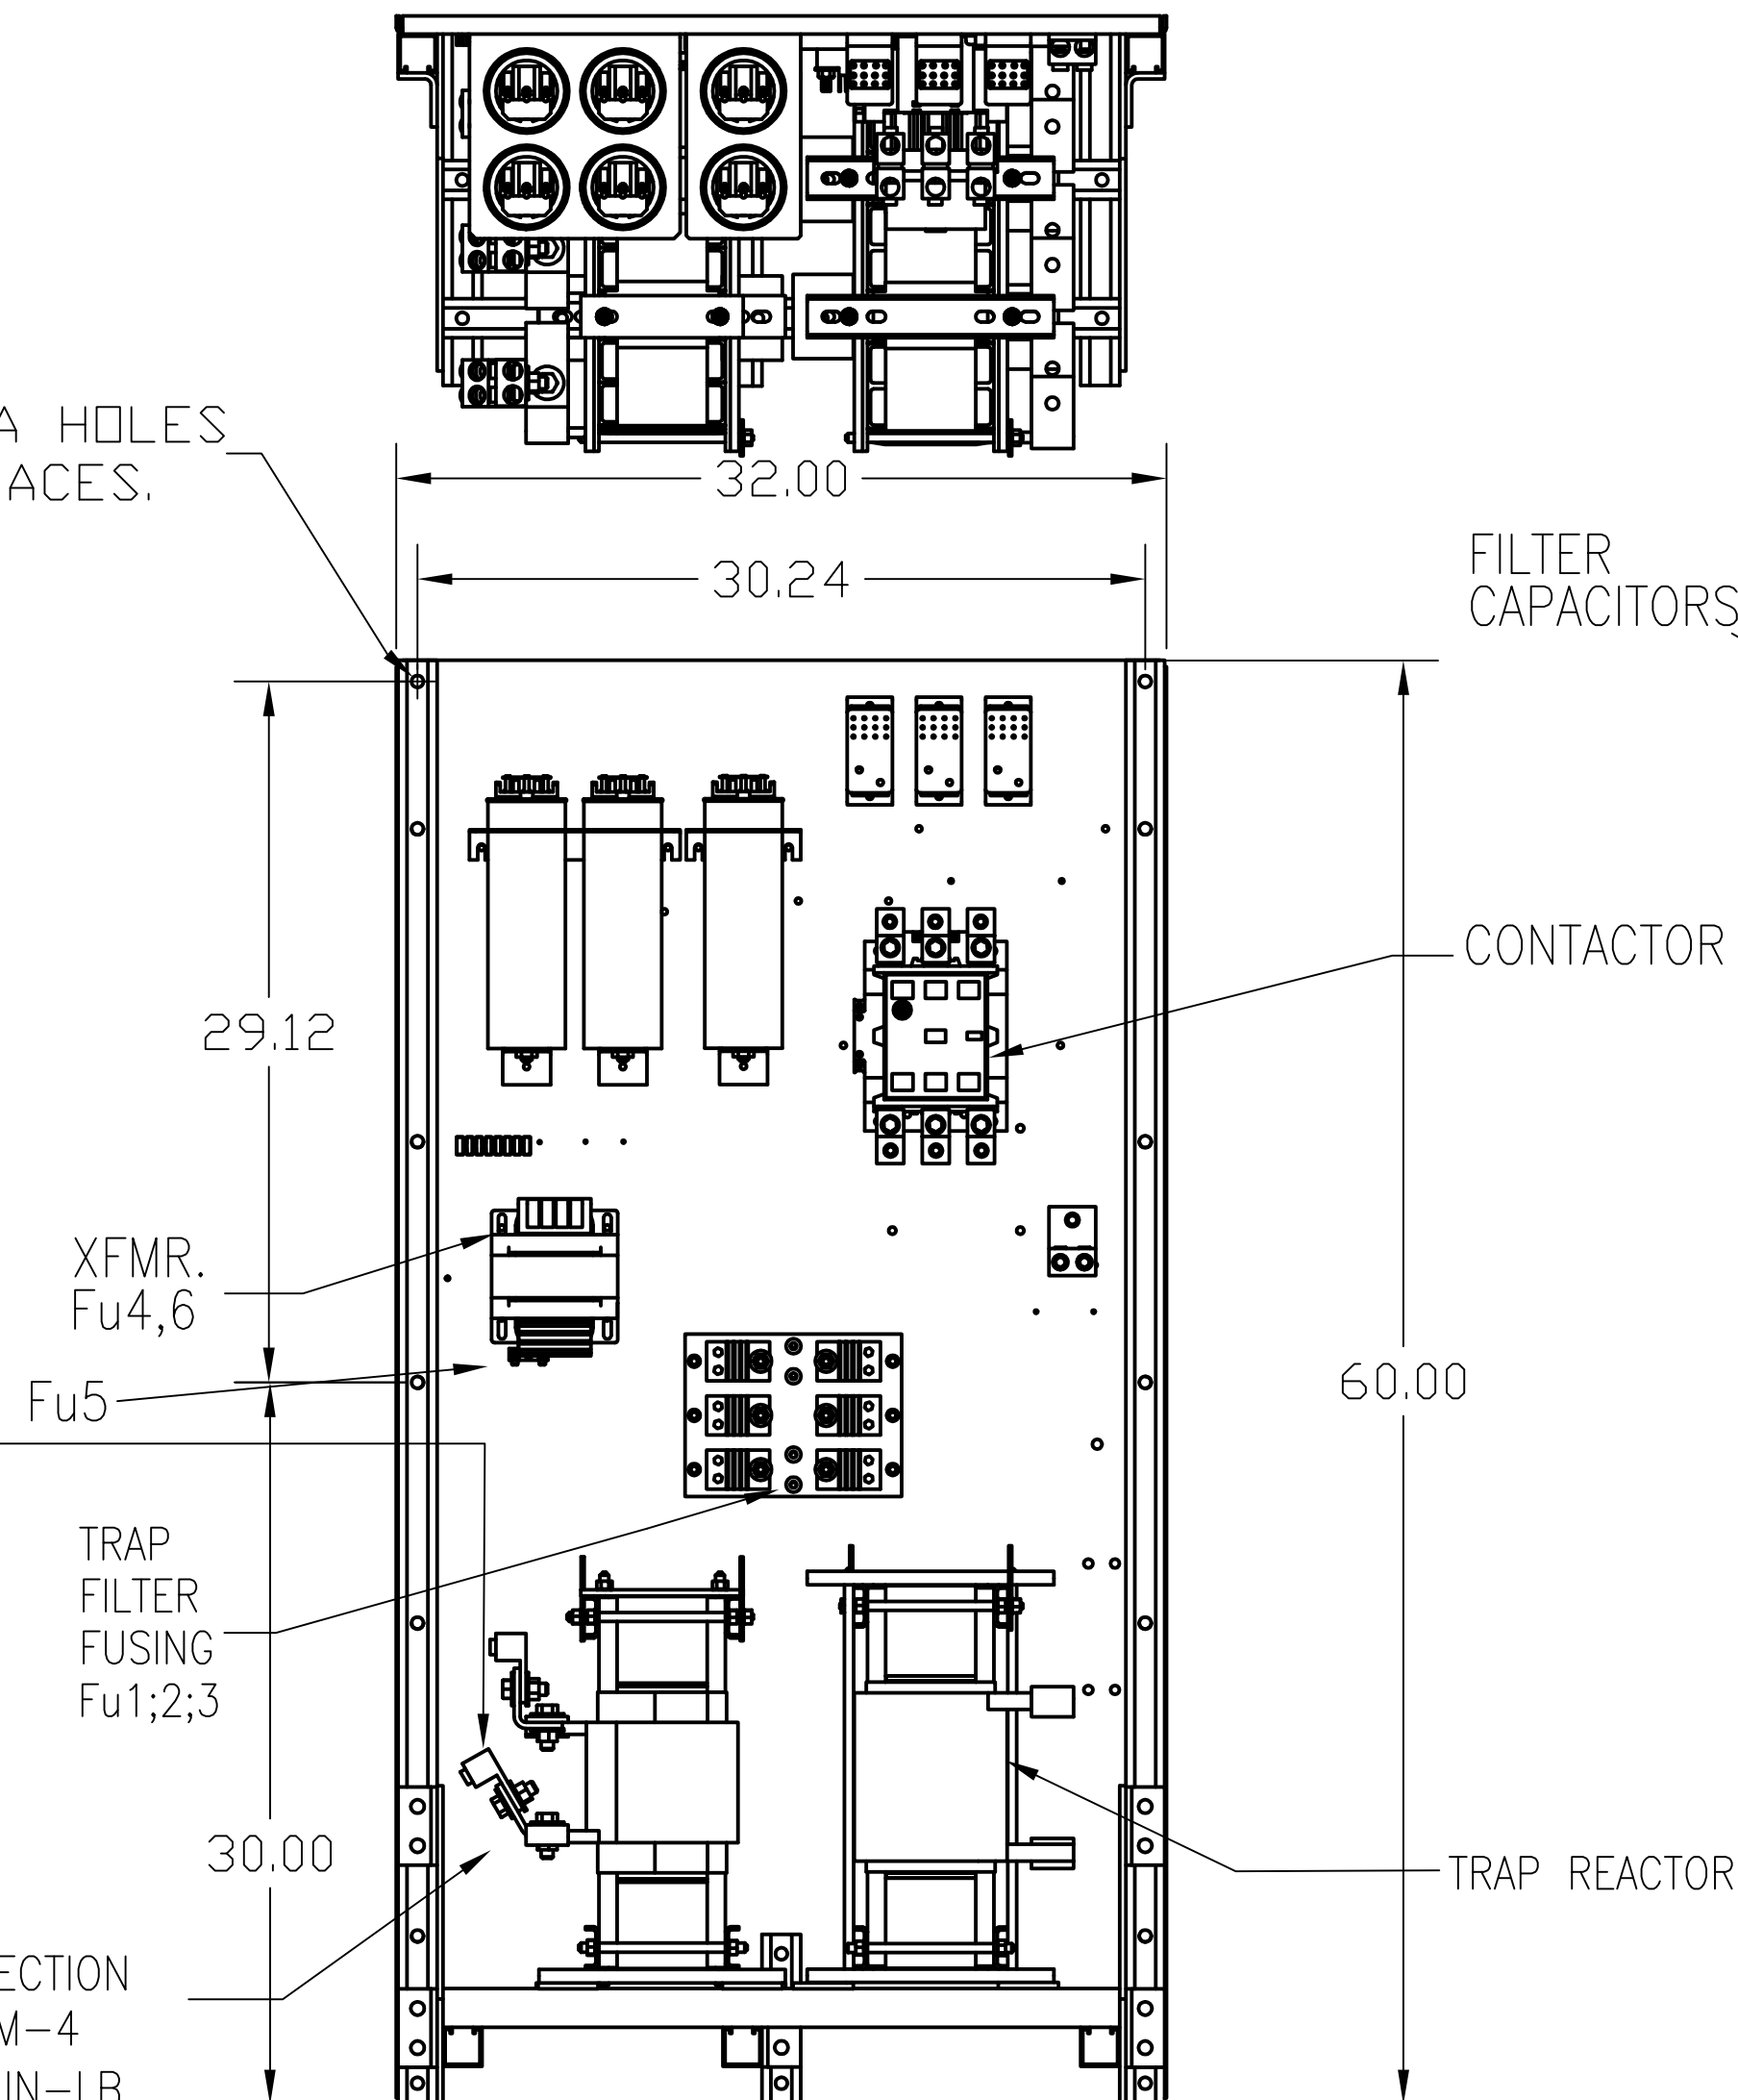


FILTER CAPACITORS

CONTACTOR

60.00

-TRAP REACTOR

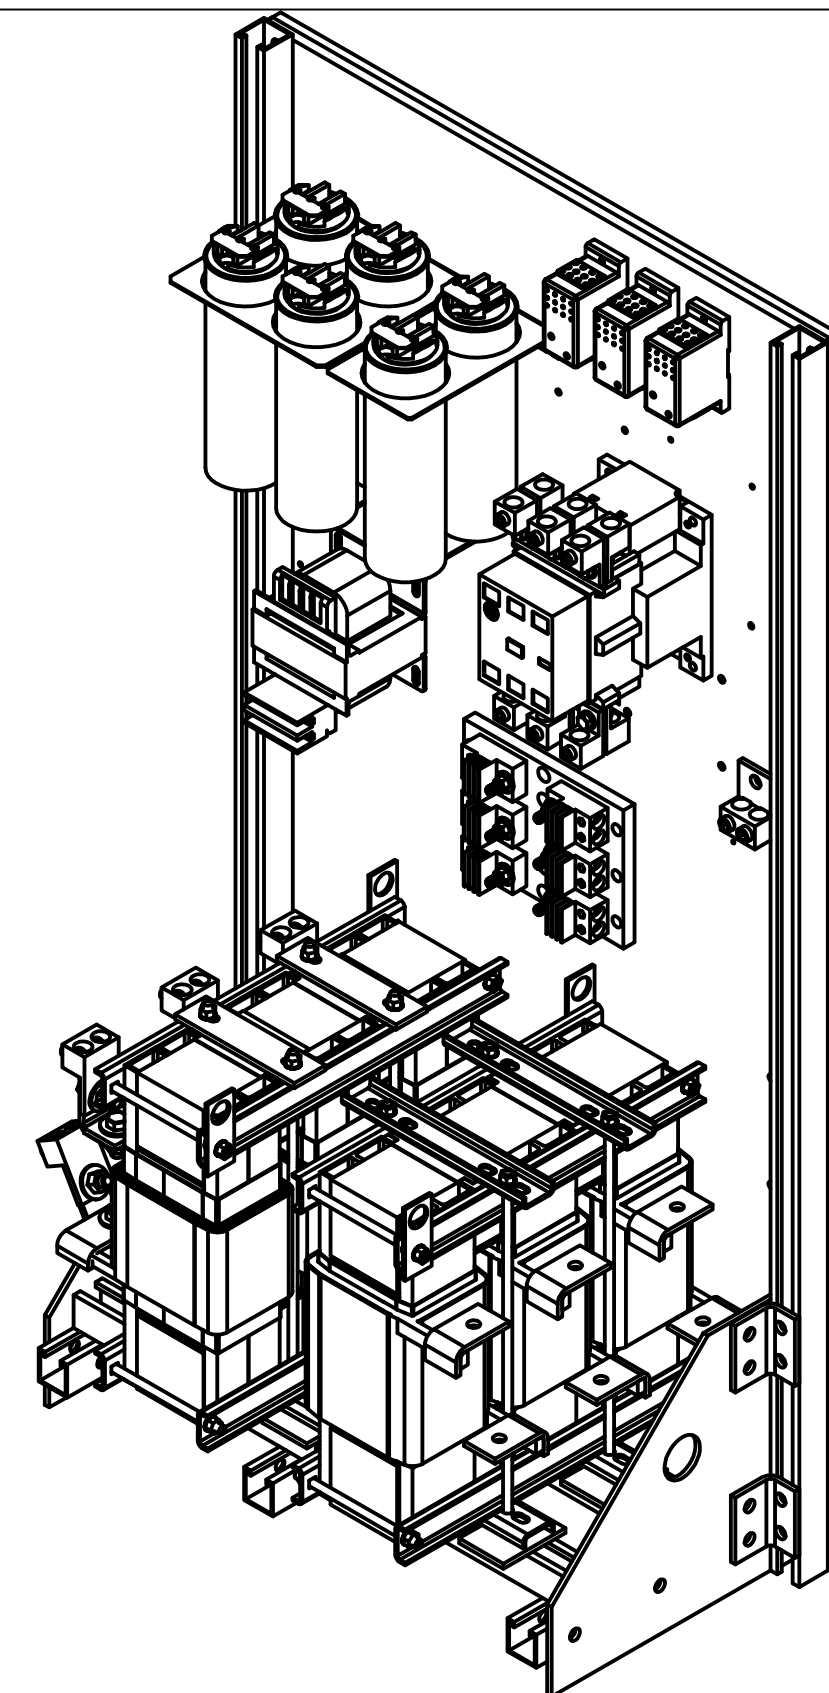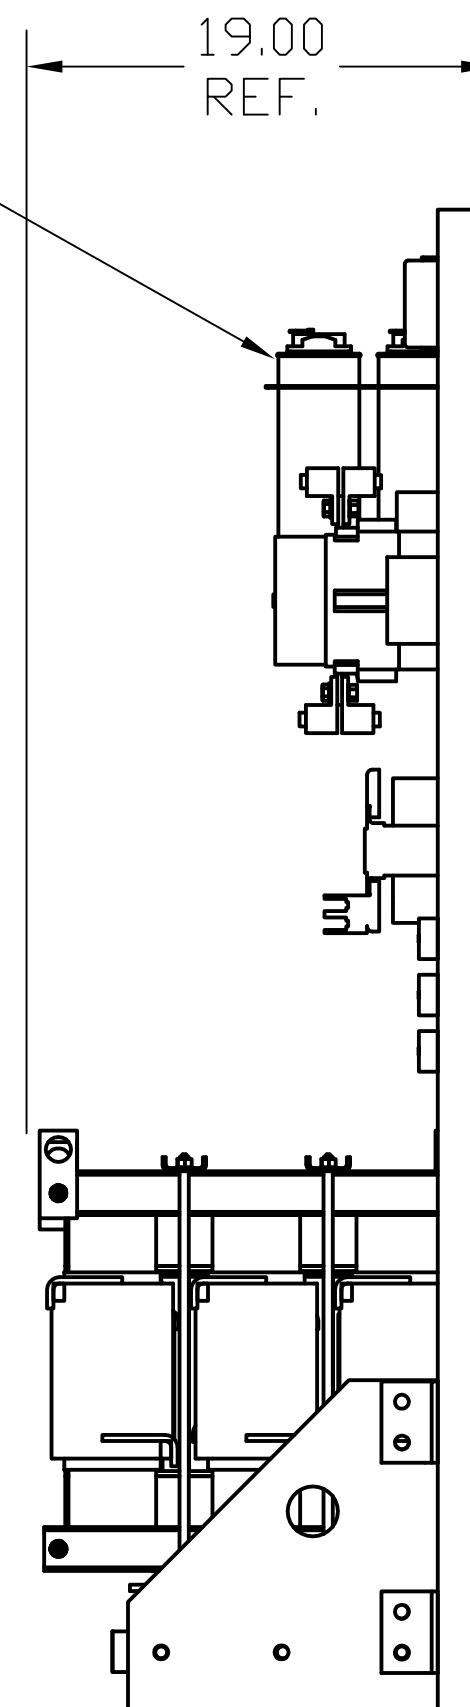

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C
PC BOARD MAX. AMBIENT 40°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
120	5TH	480	60	3	400
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		570			

FOR SCHEMATIC SEE DWG# 26690

SYMBOL	HG400AW00STC
LR	X
TR	X
CAPS	X
CONTACTOR	X
XFMR.	X
Fu1a;2a;3a	X
Fu4,6	X
Fu5	X

				TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 GRANT DRIVE GERMANTOWN, WI. 53022		
				DECIMAL			
				.XX ± .03			
				.XXX± .01			
				FRACTIONAL ± 1/32			
B	3267 CNT CHANGE	5/3/16	BWM	ANGULAR ± 1/2°	DRN. BY DSW	DATE 7/24/08	DWG. NO. C 103541
NO	REVISION	DATE	BY		SCALE 1 IN = 1 FT	APRVD.	SHT. 1 OF 1