UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
120	5TH	600	60	3	400
ENCLOSURE	WHITE OPEN PANEL				
APPROX.WT. LBS.	600				

SYMBOL	TCI PART NUMBER
LR	KDRX43T
TR	KTR120C65HG
CAP1–6 (20KVAR)	18612
Fu1, 2, 3	11175

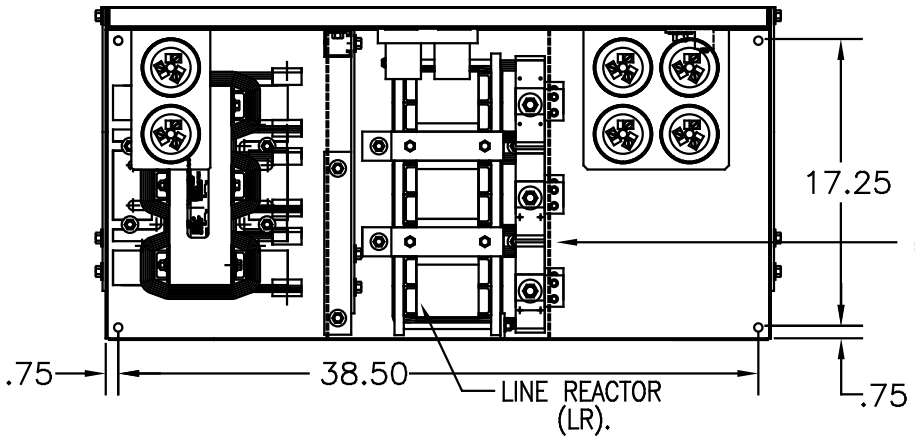

CUSTOMER CONNECTIONS:

L1 L2 L3

T1 T2 T3

SEE 25115 FOR SCHEMATIC

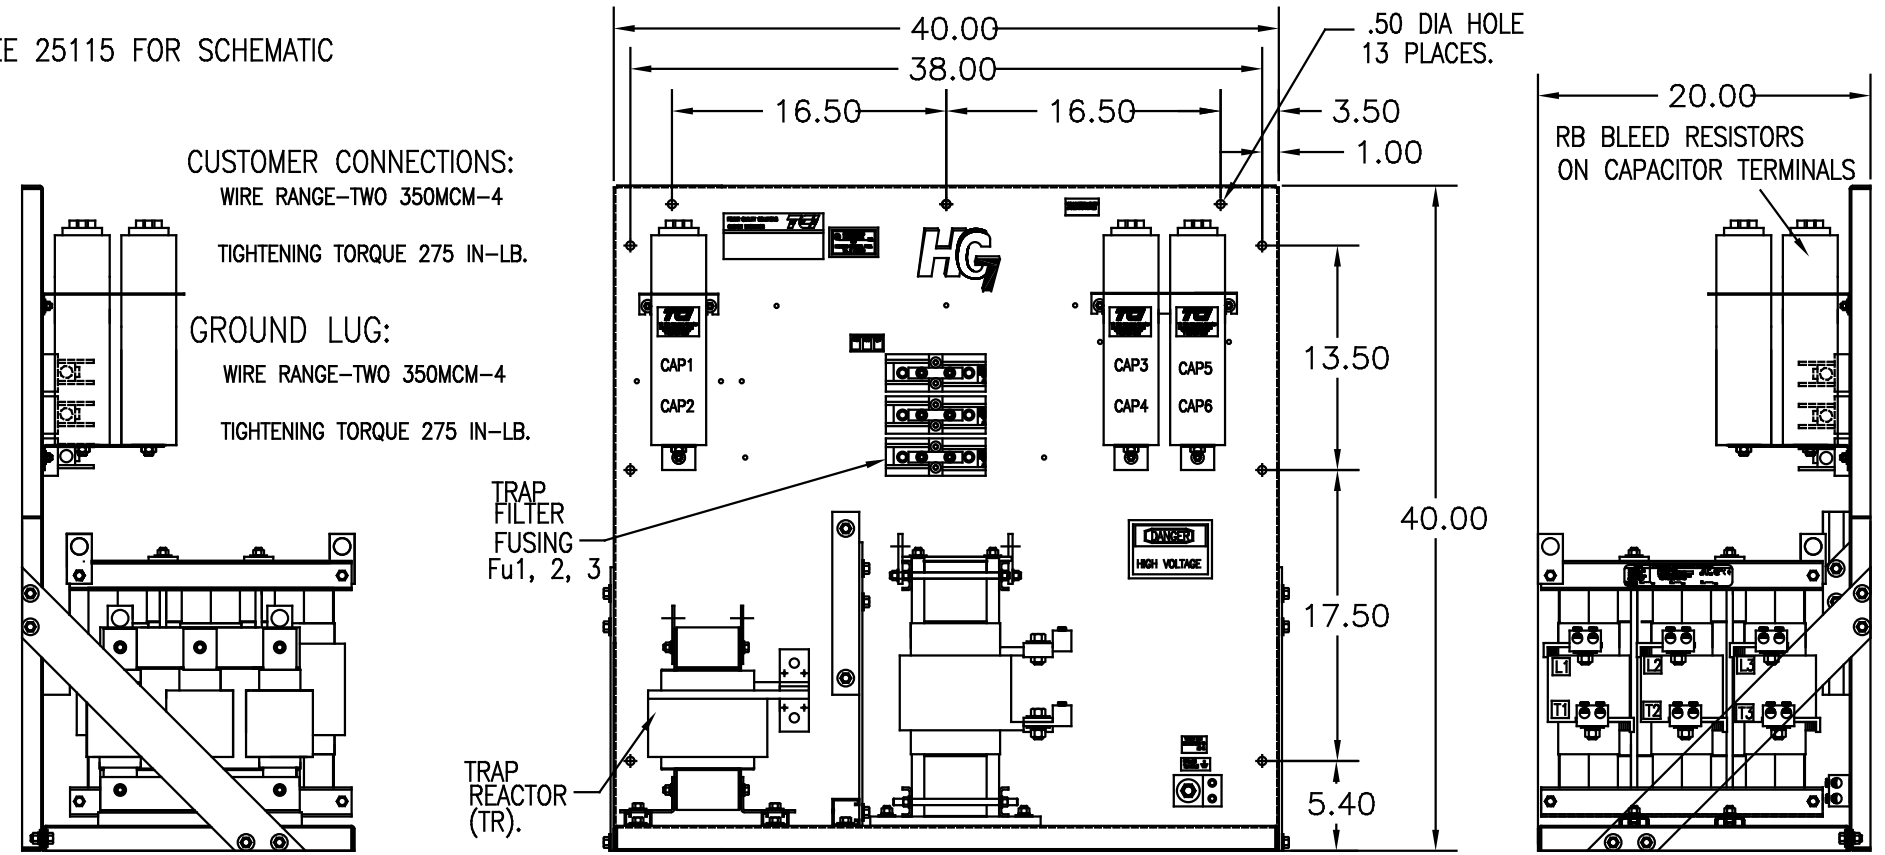

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
±1/32
ANGULAR
±1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

HG400CW00ST HG7 STANDARD 400HP, 600/3/60 OPEN

DRN. BY DSW | DATE 06/02/05 | DWG. NO. C 102694DG

SCALE TO FIT | APPVD. | SHT. 1 OF 1