


UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
120	5TH	600	60	3	400	
ENCLOSURE		NEMA 1				
FEATURES		WITH CONTACTOR				
APPROX.WT. LBS.		1005				

SYMBOL	TCI PART NUMBER
LR	KDRX43T
TR	KTR120C65HG
(20 KVAR) 6 PLACES.	KCAP20C6B
Fu1a;2a;3a	11175
Fu4,6	24390
Fu5	23977
CNT	19246

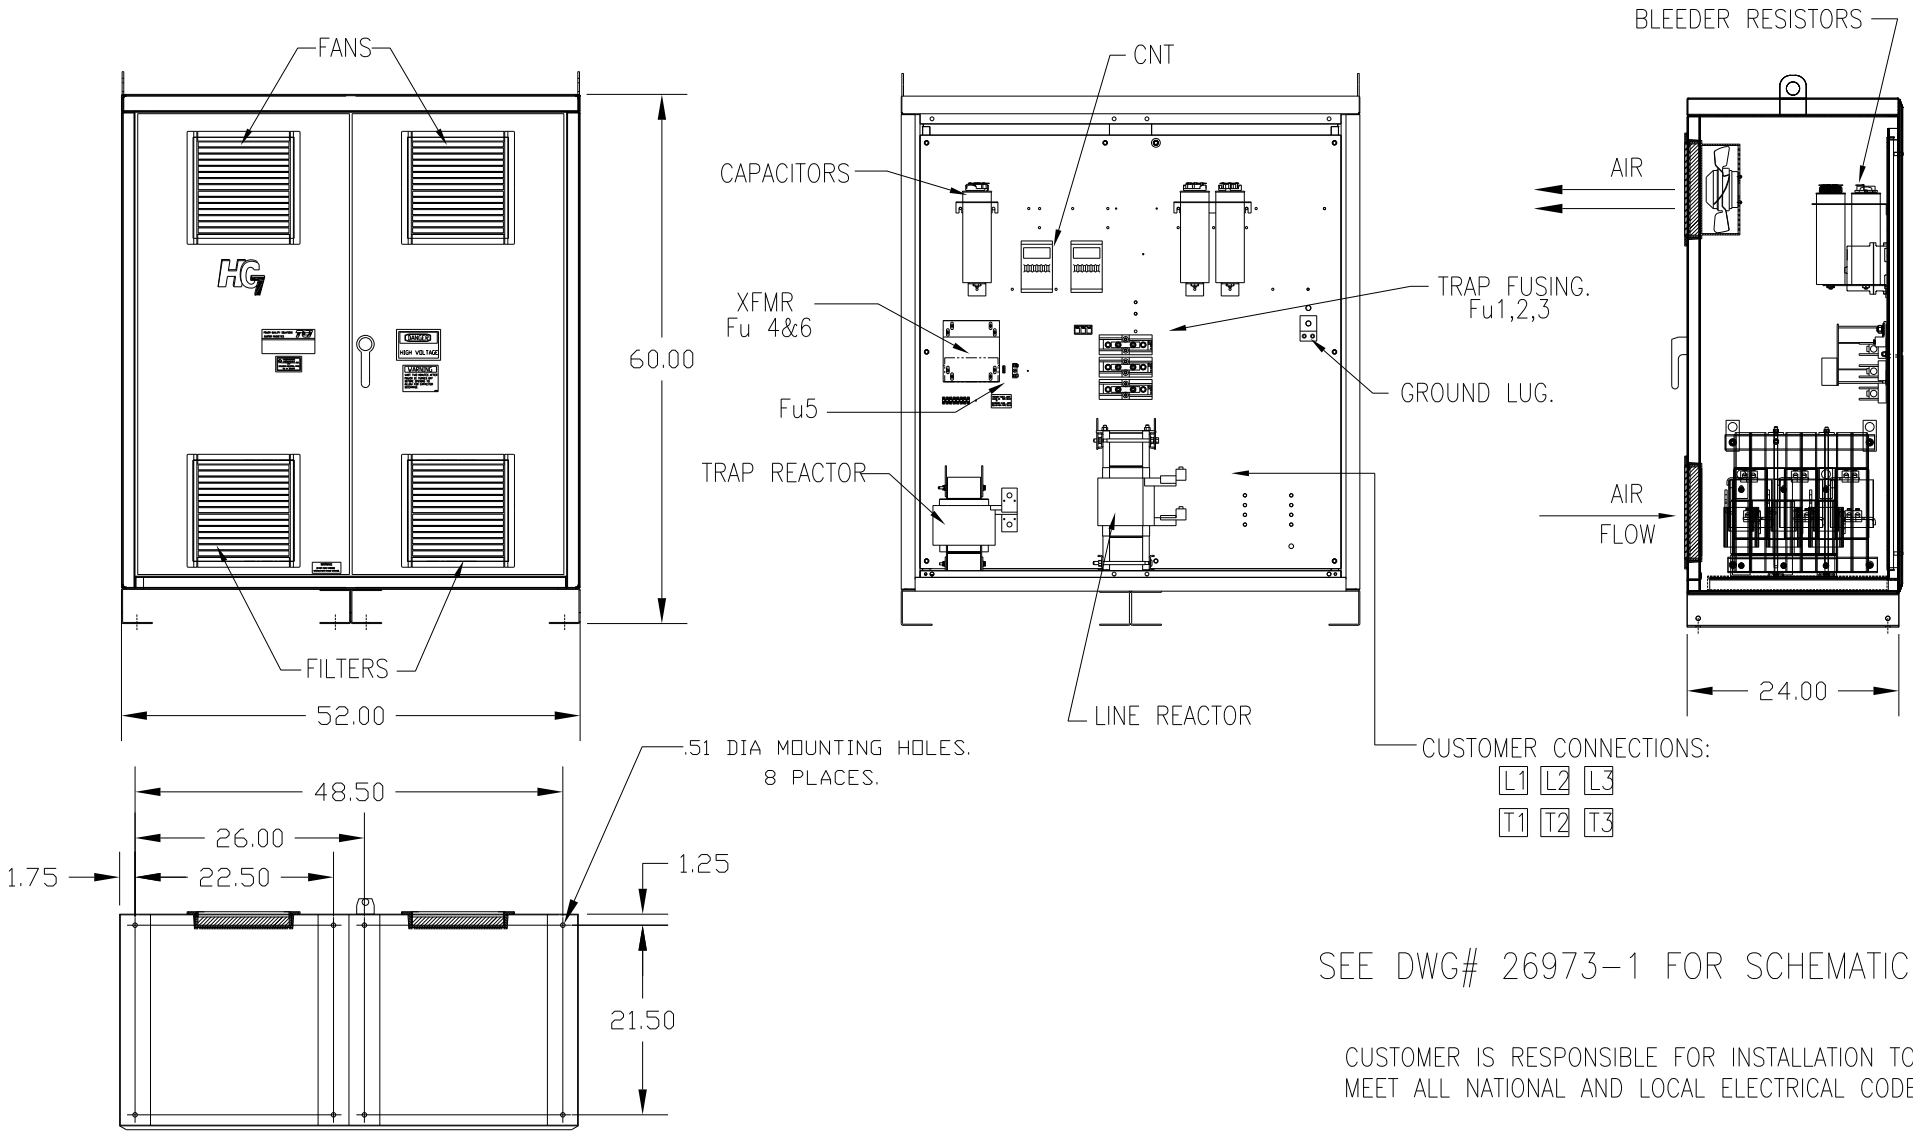

SEE DWG# 26973-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

CUSTOMER CONNECTIONS:
WIRE RANGE-TWO 350MCM-4
TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
WIRE RANGE-TWO 350MCM-4
TIGHTENING TORQUE 275 IN-LB.

				TOLERANCES (EXCEPT AS NOTED)	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		
				.XX ± .03		
				XXX ± .01		
B	2786 REMOVE COLOR	11/14/11	DSW	FRACTIONAL	HG400CW01STC, HG7	
B	CHG FUSEBLOCK, FUSE	11/14/11	DSW	± 1/32	400 HP, 600/3/60, TYPE 1	
A	2702 RVSD FUSEBLK&FUSE	9/2/10	RJC	ANGULAR	DRN. BY DSW	DATE 03/19/09
NO	REVISION	DATE	BY	± 1/2°	SCALE TO FIT	APRVD
					DWG. NO. 103561DG	
					SHT. 1 OF 1	