





SEE DWG# 26972-2 FOR SCHEMATIC
 CUSTOMER IS RESPONSIBLE FOR INSTALLATION
 TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.
 NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
120	5TH	600	60	3	400
ENCLOSURE		TYPE 3R- COLOR, WHITE			
APPROX.WT. LBS		966			

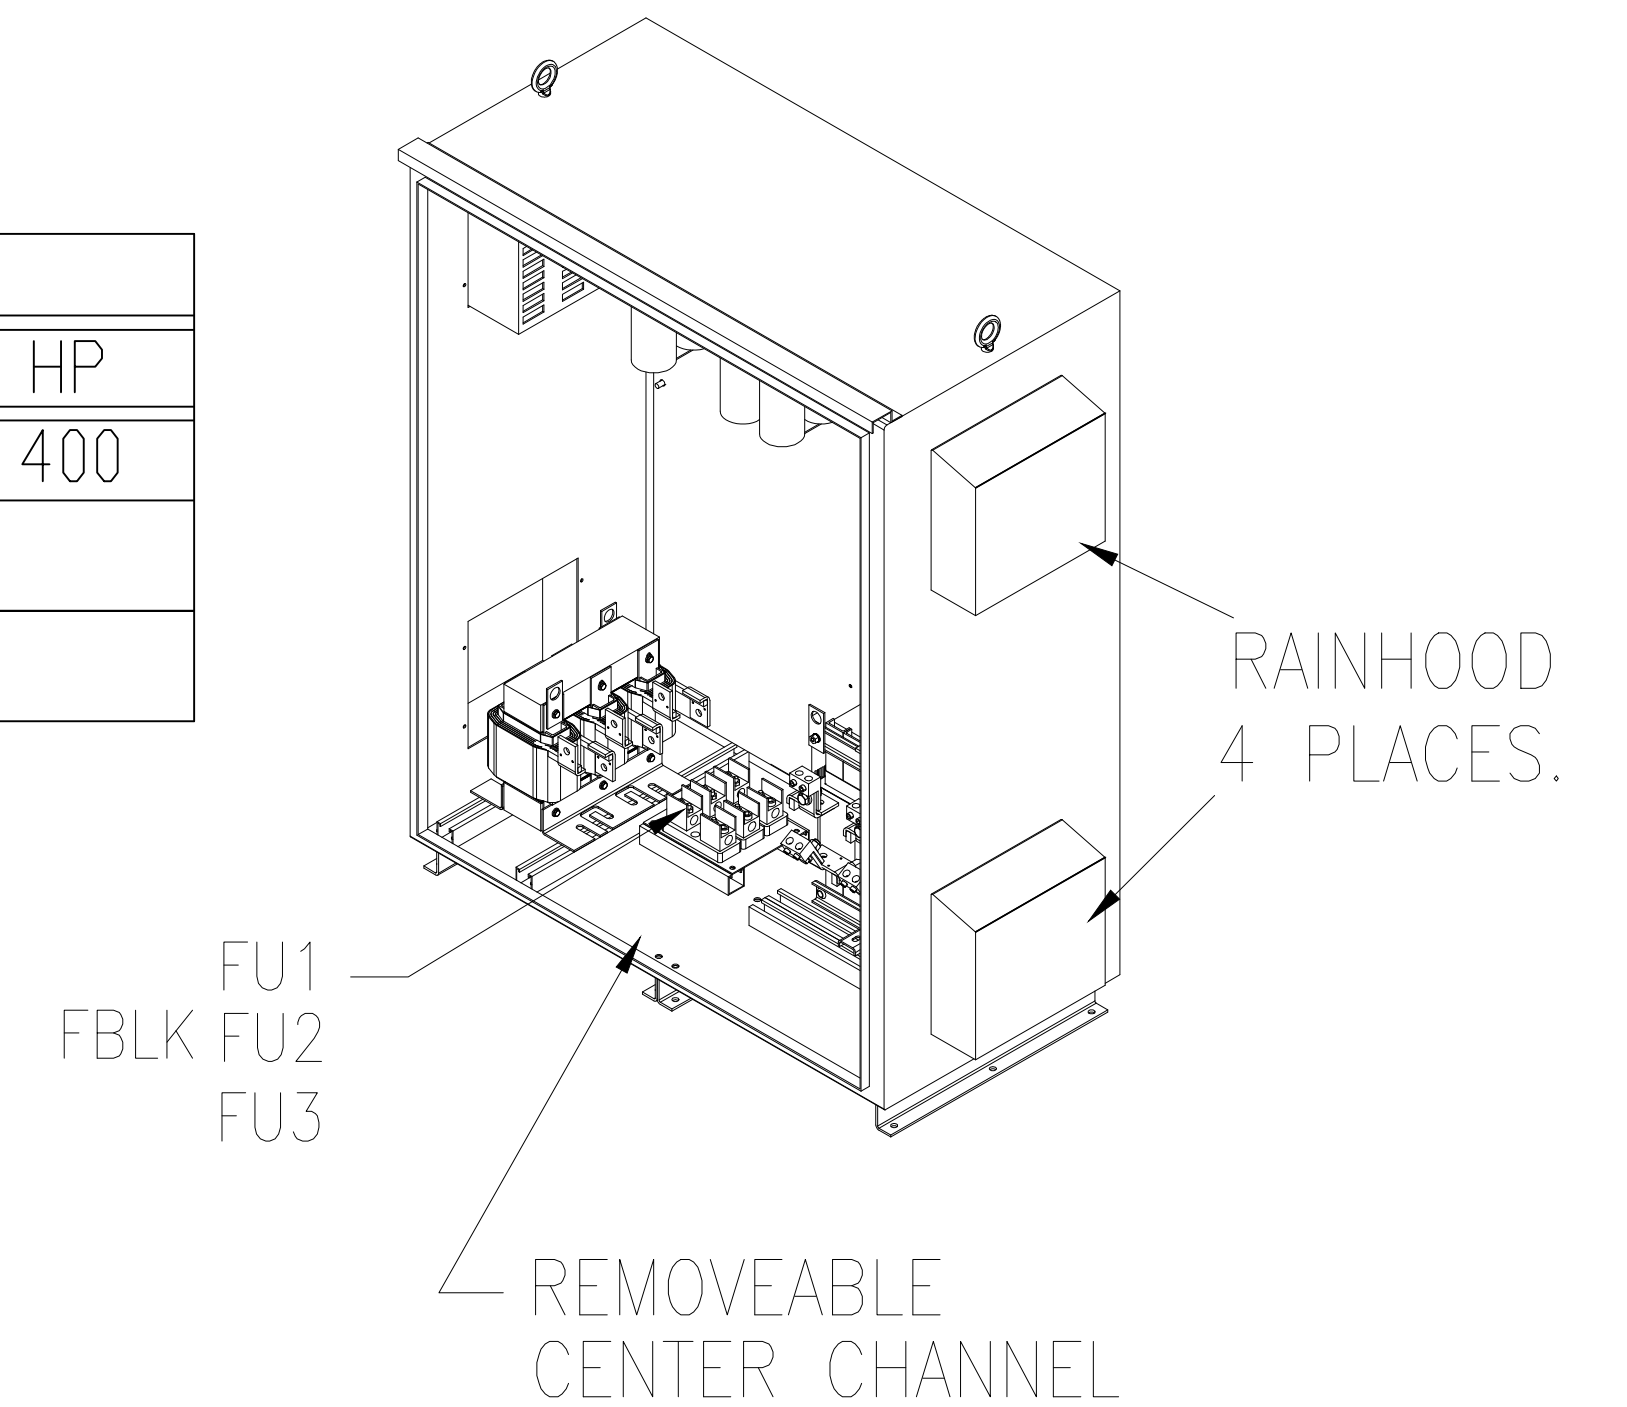



INSIDE
DOOR

SIDE VIEW

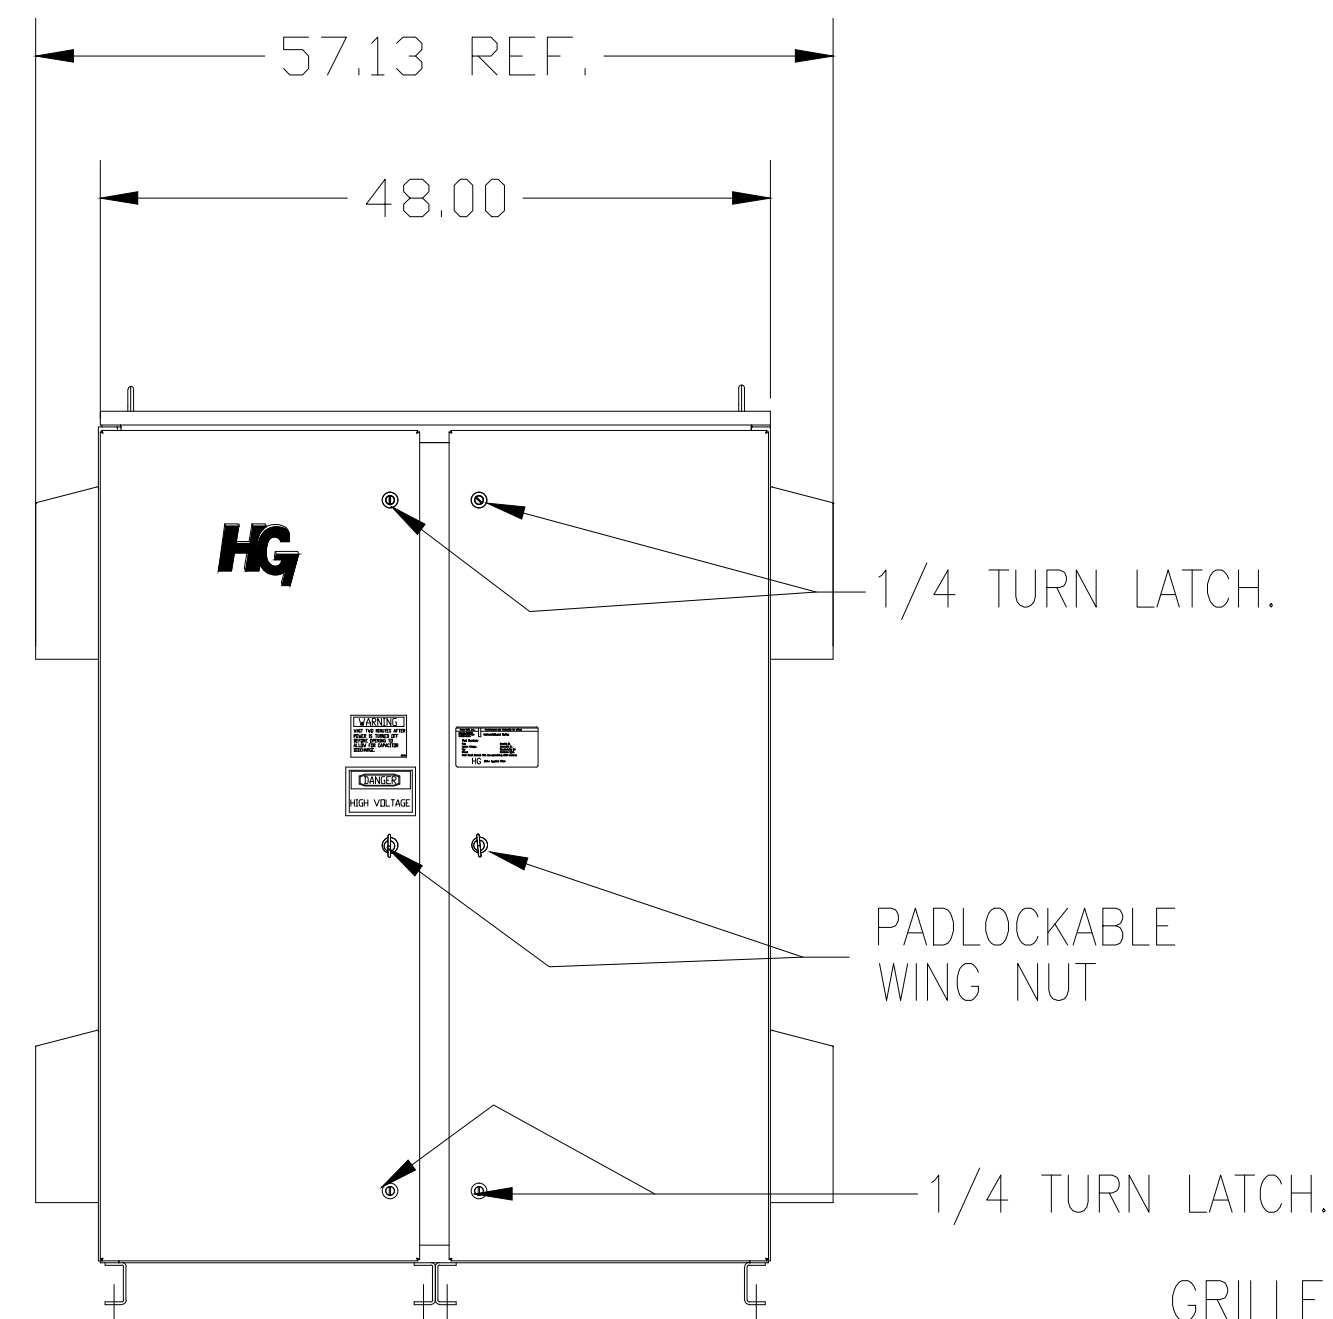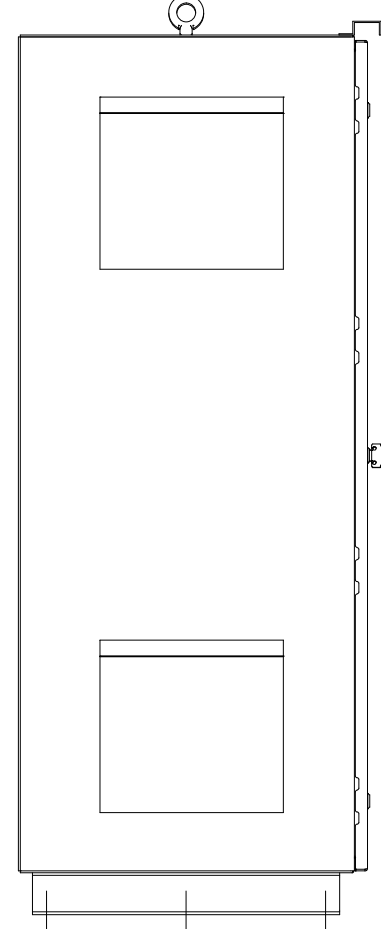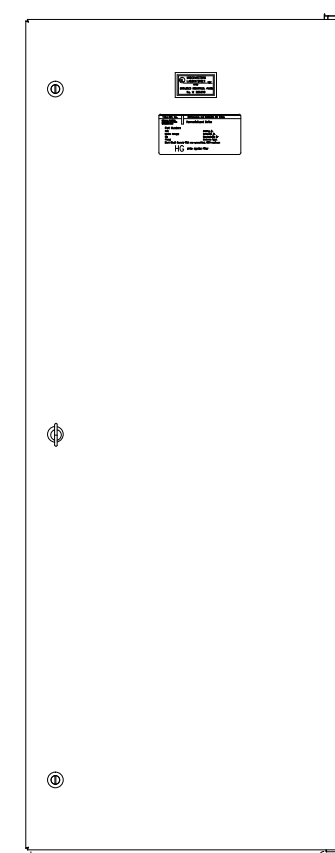

FRONT VIEW
WITH DOORS.


FRONT VIEW
WITHOUT DOORS

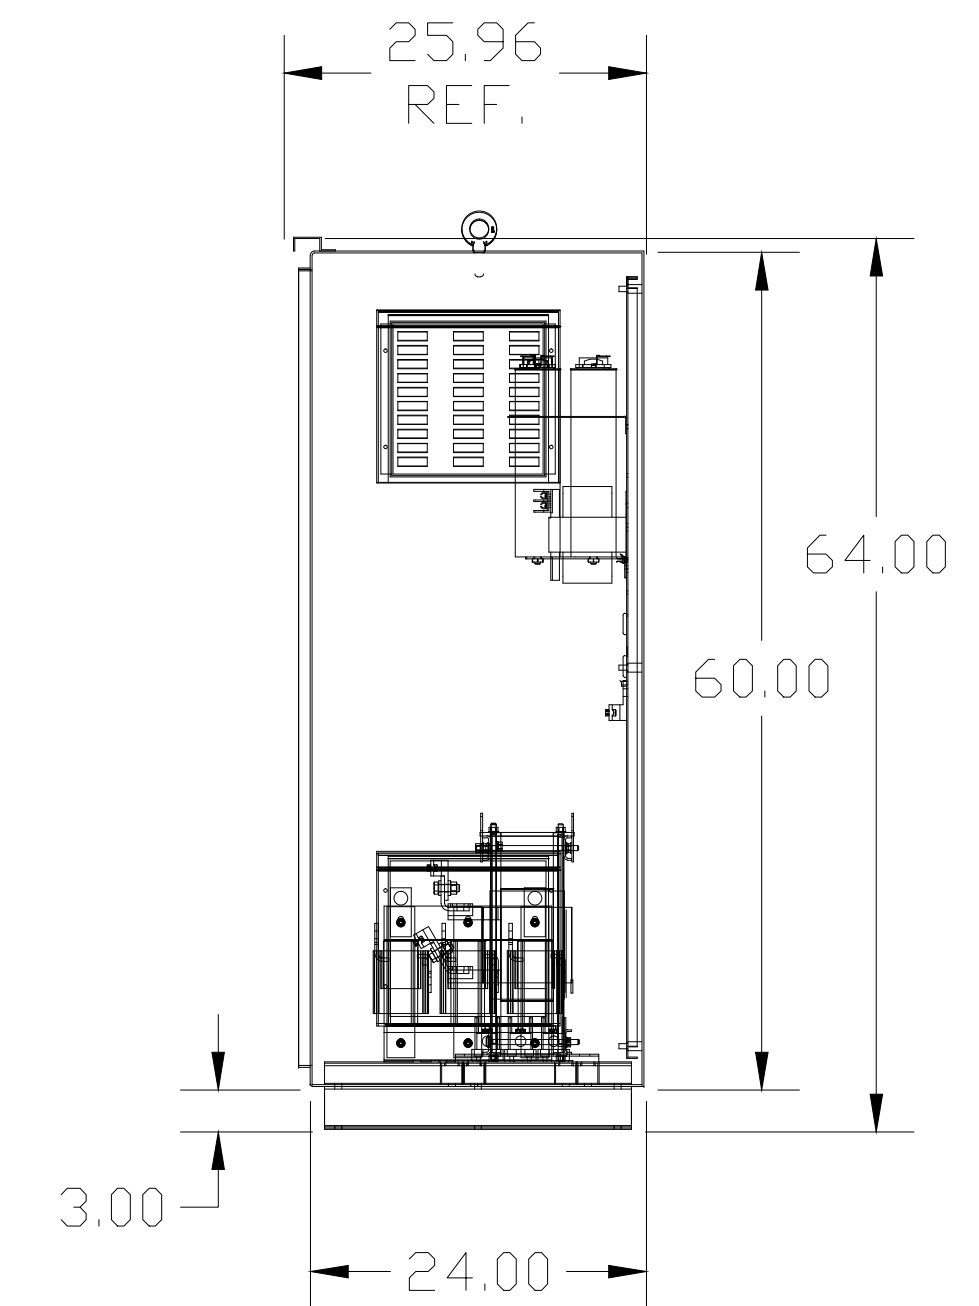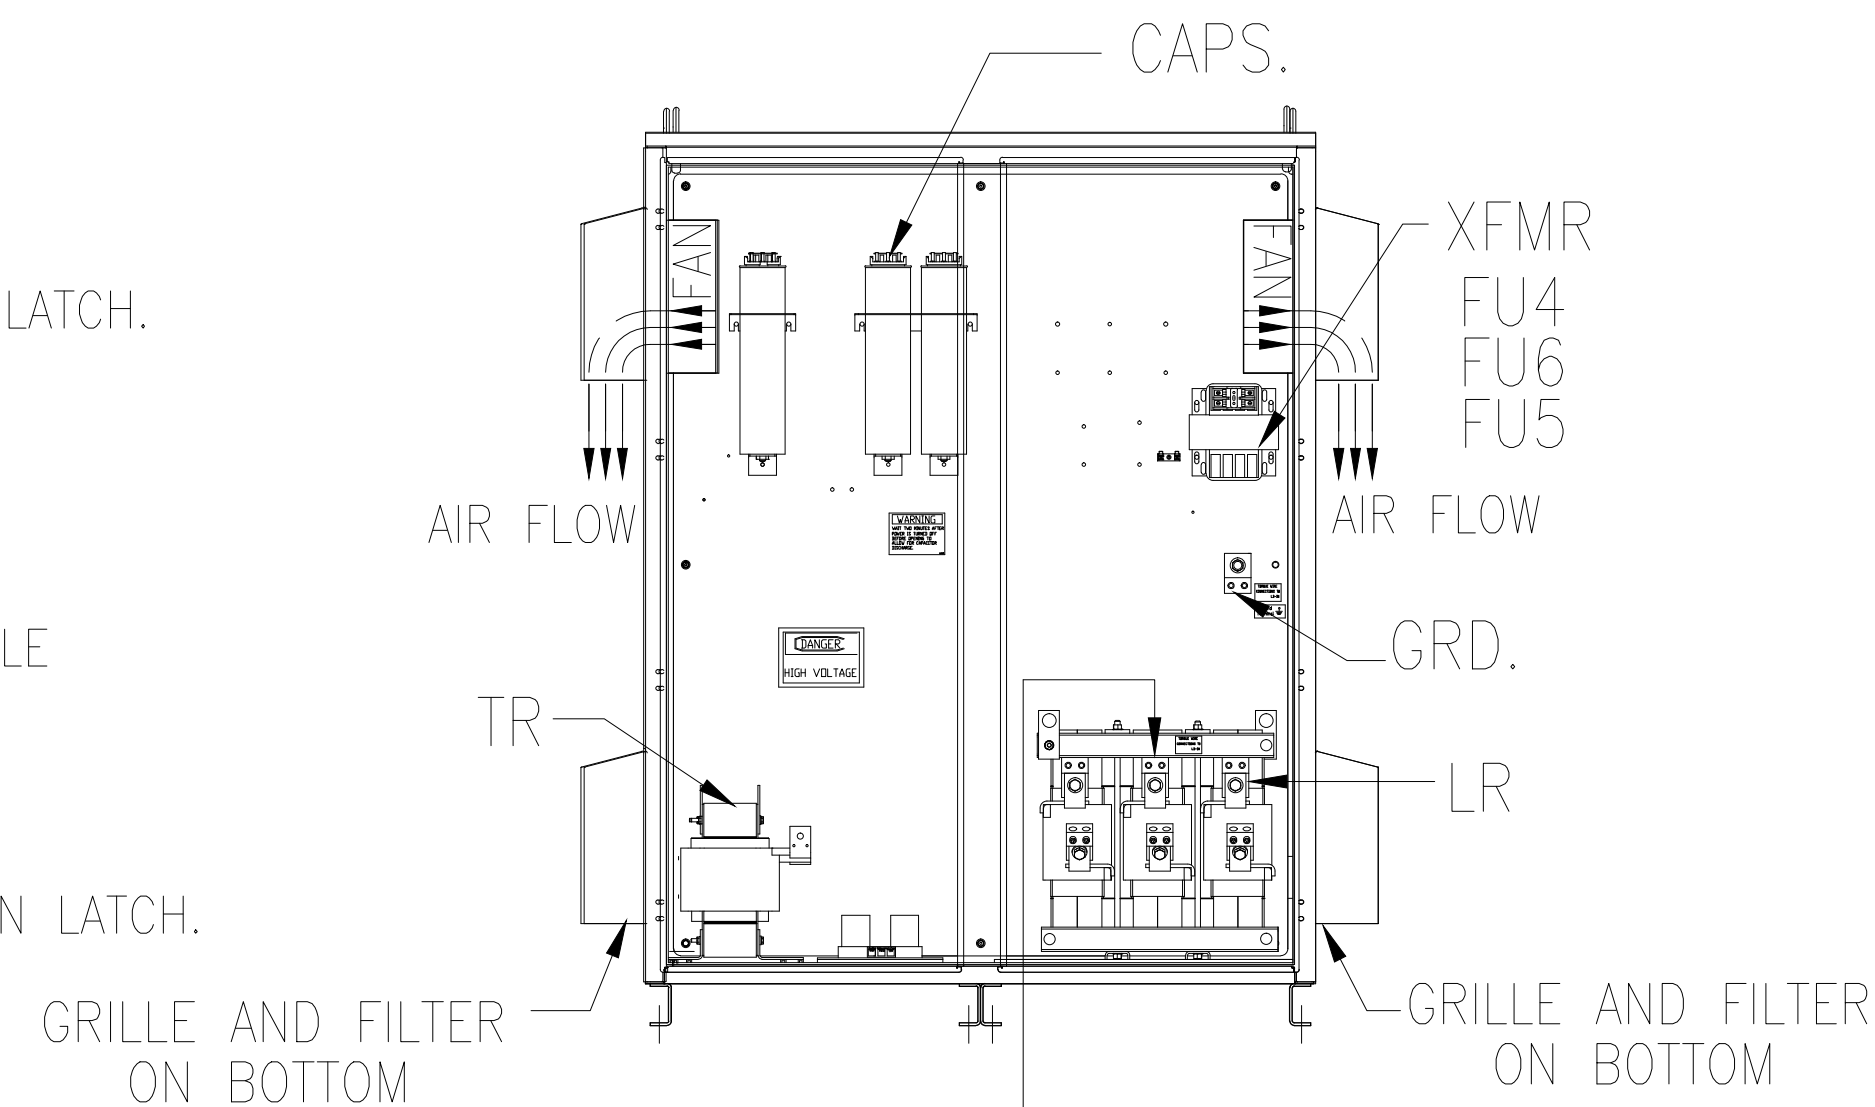

SIDE VIEW

L1 L2 L3 T1 T2 T3
 SUGGESTED CUSTOMER WIRE ENTRY
 AND EXIT LOCATION

.50 DIA HOLES
12 PLACES.

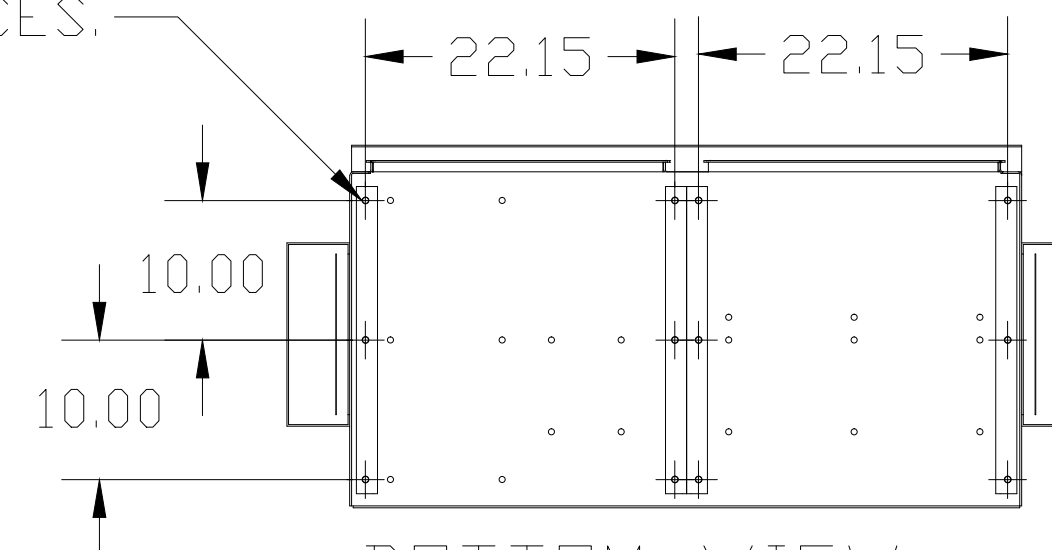

BOTTOM VIEW

GROUND LUG:
 WIRE RANGE-TWO 350MCM-4
 TIGHTENING TORQUE 275 IN-LB.

CUSTOMER INPUT/OUTPUT
 CONNECTIONS:
 WIRE RANGE-TWO 350MCM-4
 TIGHTENING TORQUE 275 IN-LB.

SYMBOL	TCI PART NUMBER
LR	KDRX43T
TR	KTR120C65HG
(20 KVAR) 6 PLACES.	KCAP20C6B
XFMR.	24389
Fu1;2;3	11175
Fu4,6	24390
Fu5	23977
CNT	19246

<small>TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.</small>	TOLERANCES (EXCEPT AS NOTED)	TCI® w132 N10611 Grant Drive Germantown, WI 53022	
	DECIMAL		
	XX ±.12		
	XXX ±.06		
FRACTIONAL	± 1/32	HG400CW03ST, 400HP 600/3/60 UL TYPE 3R	
ANGULAR	± 1/2°	DRN BY DSW DATE 2/26/09 DWG NO. 103647DG SCALE TO FIT SIZE D SHT.1 OF 1	
NO	REVISION	DATE	BY