



CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.





SEE DWG# 26900 FOR SCHEMATIC

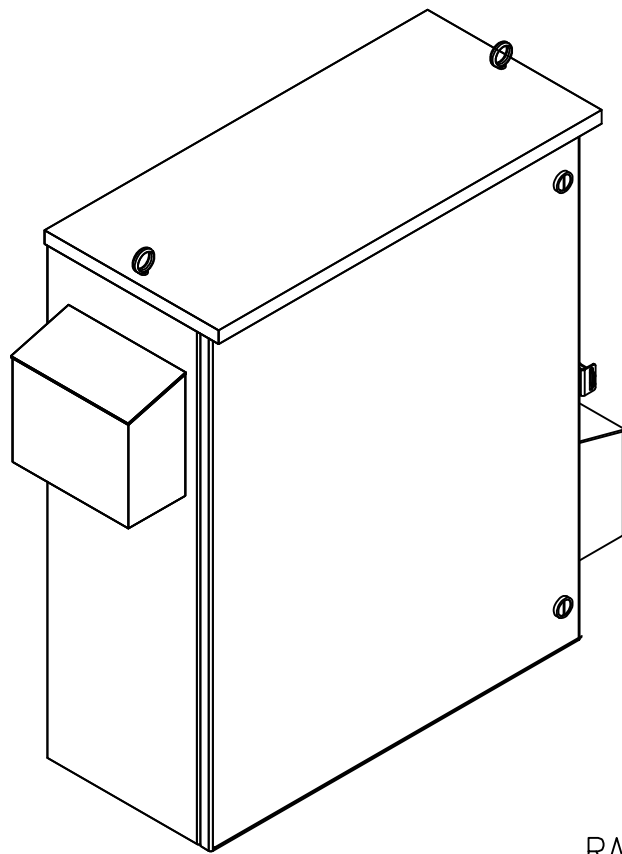


SIDE VIEW

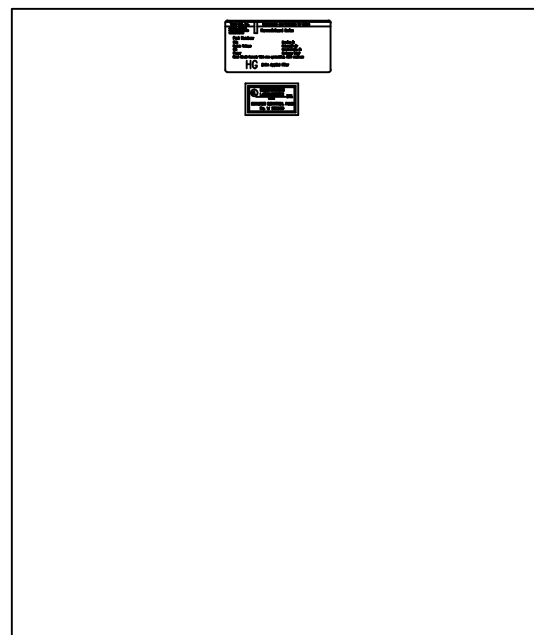

INSIDE DOOR

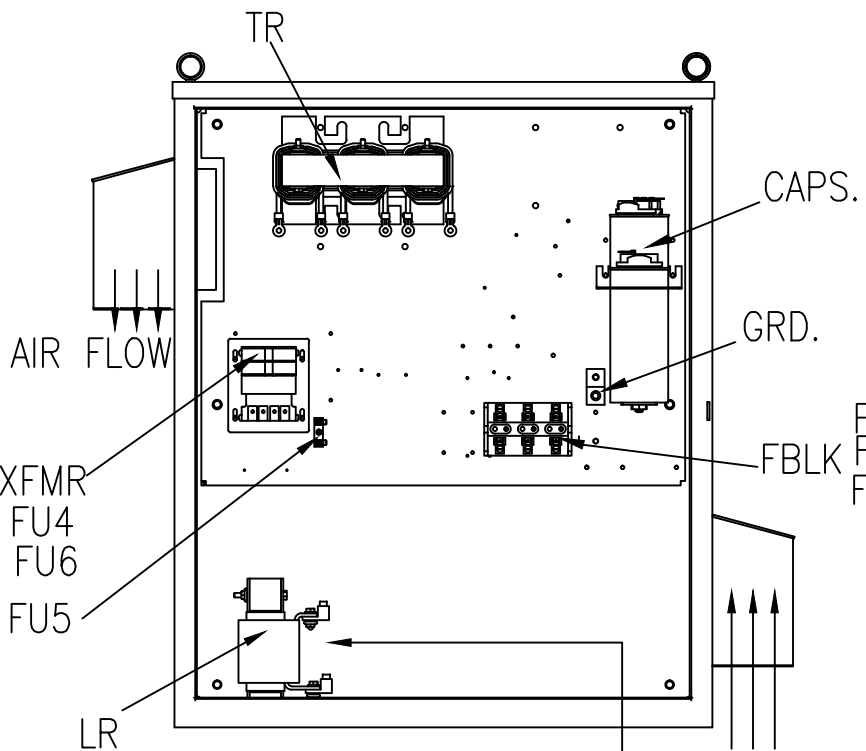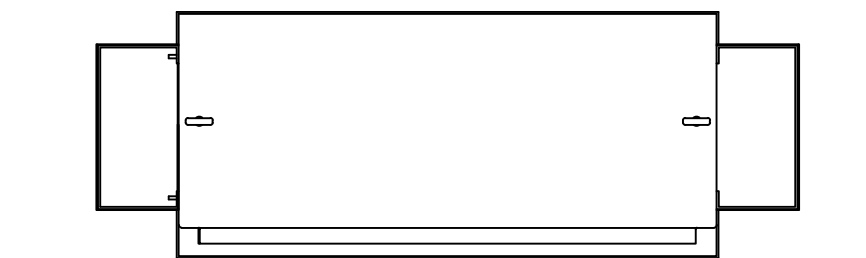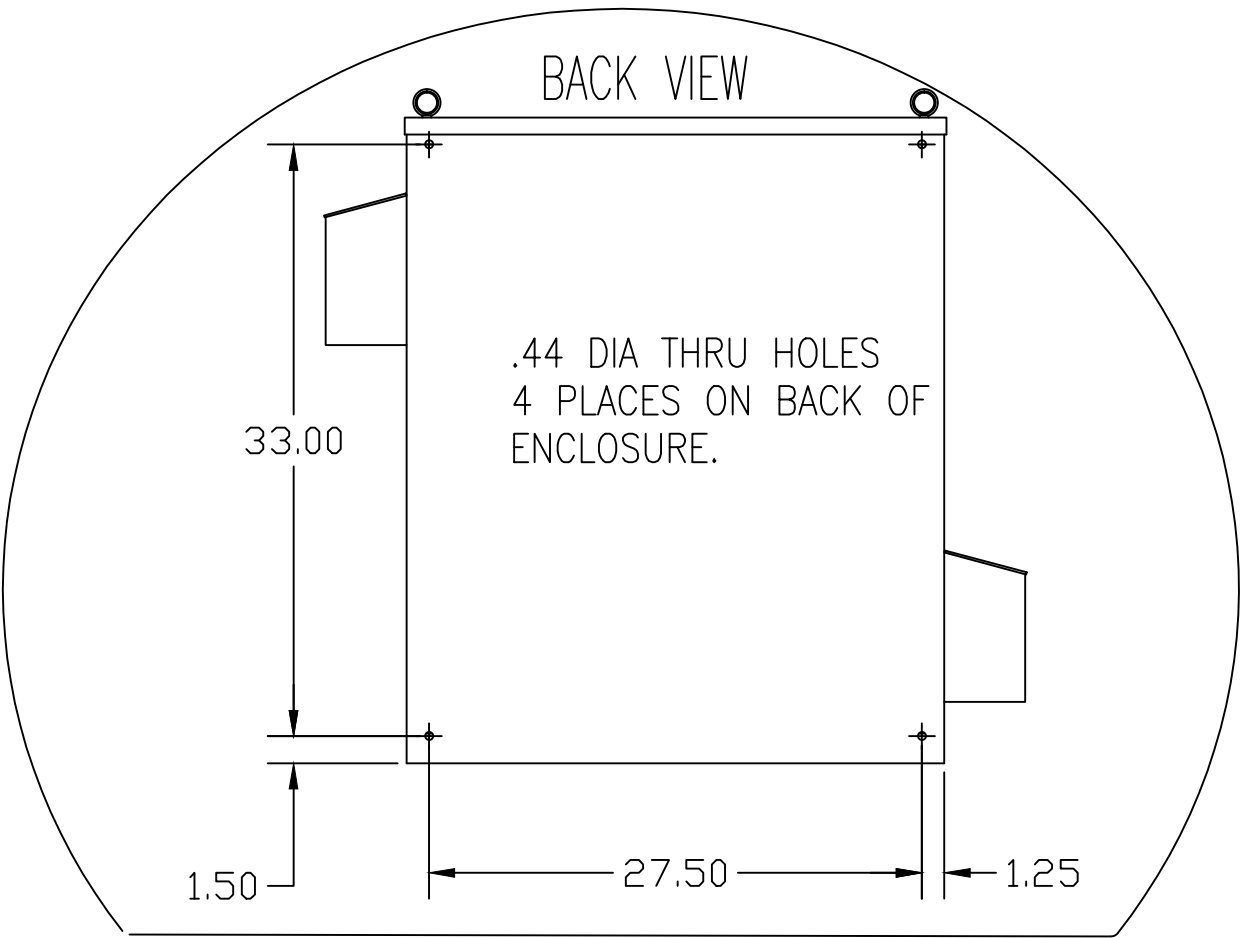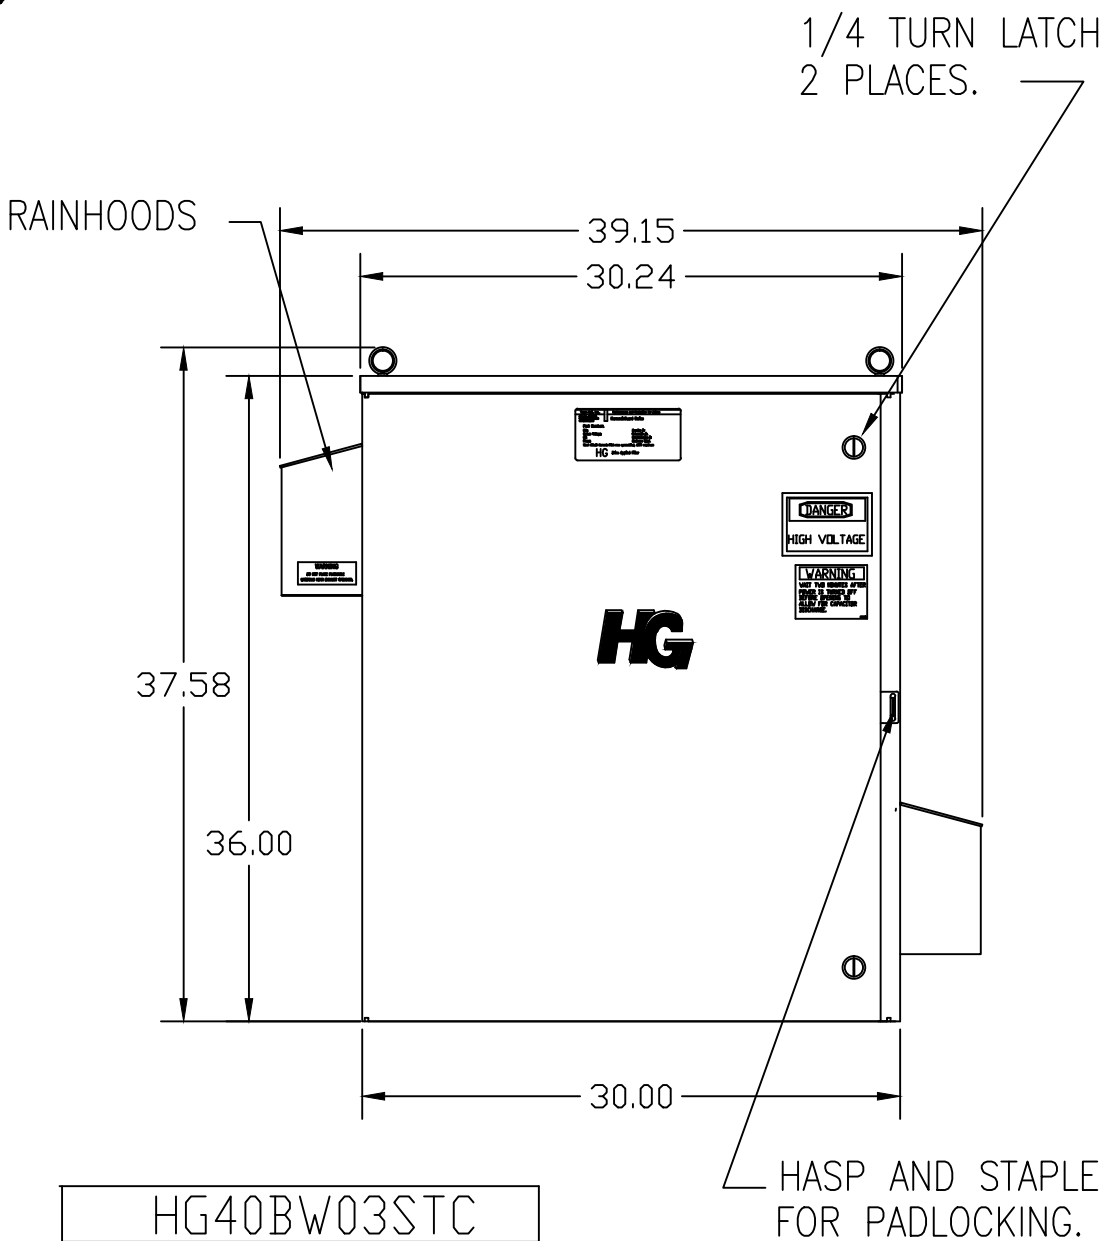

SIDE VIEW

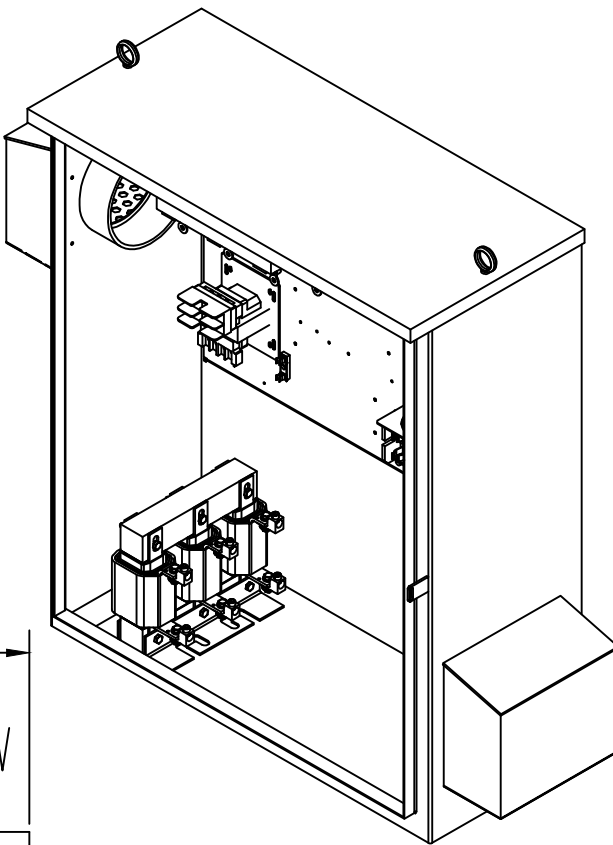

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
15	5TH	240	60	3	40
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS.		205			

HG40BW03STC		
COMPONENTS		
LINE REACTOR	LR	X
TRAP REACTOR	TR	X
CAPACITOR	CAP	X
TRAP FUSING	FU1,2,3	X
XFMR		X
XFMR	FU4,6	X
XFMR	FU5	X
CNT		X

WIRE SIZE (AWG)	RATED TORQUE (IN-LBS)
2/0-3	50
4-6	45
8	40
10-14	35

GROUND LUG:
WIRE RANGE-250MCM-6
TIGHTENING TORQUE 275 IN-LB.

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022
					DECIMAL	
					.XX ±.12	
					.XXX±.03	
					FRACTIONAL ± 1/32	
C 3033 UPDATE LAYOUT	2/24/14	DSW	BY	ANGULAR ± 1/2°	DRN. BY DSW	DATE 12/22/08
NO REVISION	DATE	BY			SCALE TO FIT	SIZE C
					DWG. NO. 103715DG	SHT.1 OF 1