
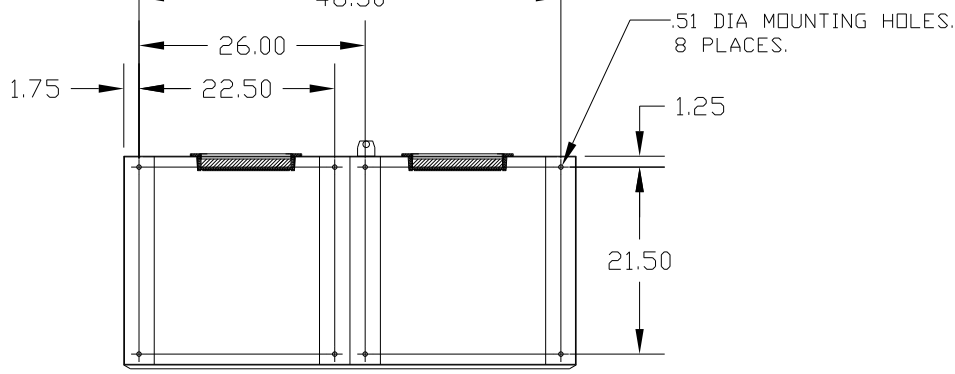


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
135	5TH	600	60	3	450
ENCLOSURE		NEMA 1			
FEATURES		WITH CONTACTOR			
APPROX.WT. LBS.		1215			

SYMBOL	TCI PART NUMBER
LR	KDRX44T
TR	KTR135C65HG
(20 KVAR) 6 PLACES.	KCAP20C6B
(15 KVAR) 1 PLACE.	KCAP15C6B
Fu1a;2a;3a	12462
Fu4,6	24390
Fu5	23977
CNT	19246

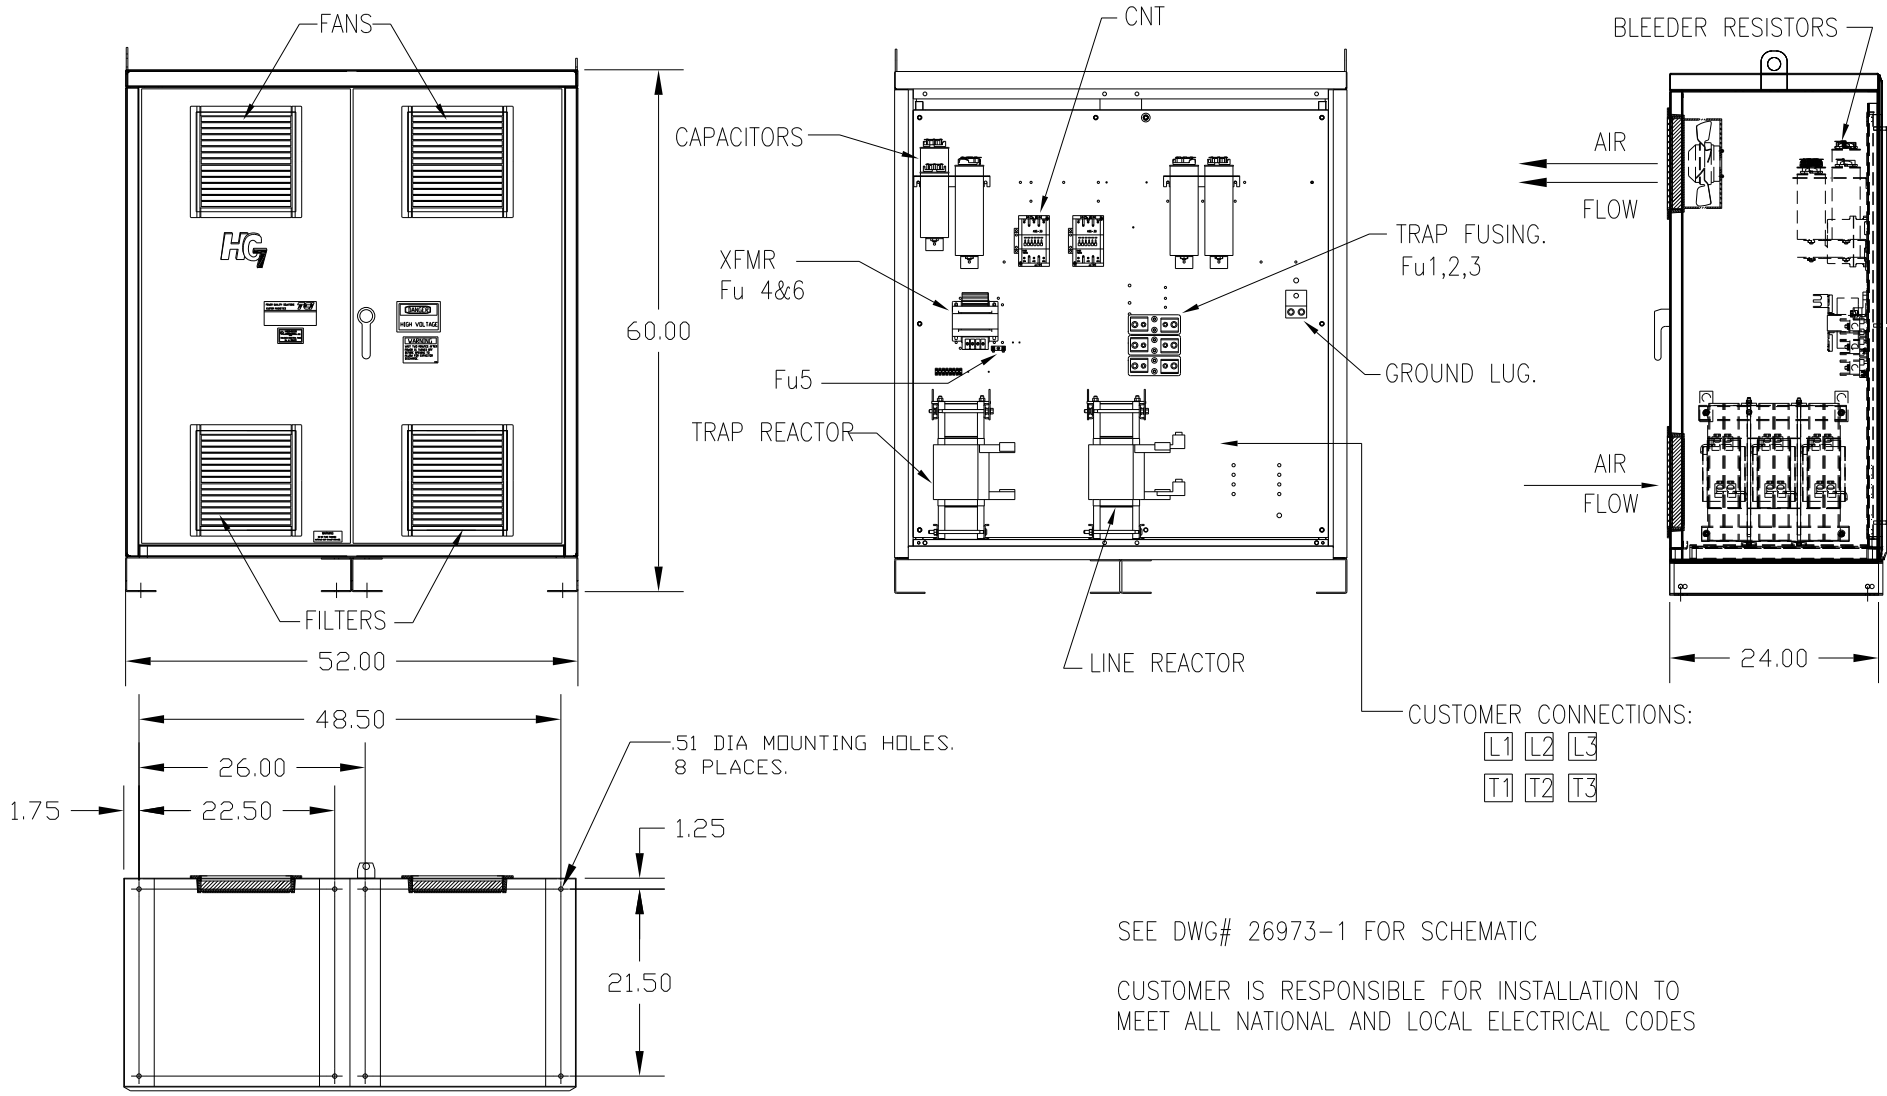

CUSTOMER CONNECTIONS:  
 WIRE RANGE-TWO 600MCM-2  
 TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:  
 WIRE RANGE-TWO 600MCM-2  
 TIGHTENING TORQUE 500 IN-LB.

SEE DWG# 26973-1 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED):		<b>TCI</b> 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL		
				.XX ± .03		HG450CW01STC, HG7 450 HP, 600/3/60, TYPE 1
				.XXX ± .01		
Updated Reactor to 135 KVAR				FRACTIONAL		DRN BY DSW DATE 03/19/09 DWG NO 103562DG
Rvsd wire chart and wires				± 1/32		
Rvsd view of caps,cnt				ANGULAR		SCALE TO FIT APPRVD
8/28/11RJC				± 1/2°		
NO	REVISION	DATE	BY	C 103562DG SHT. 1 OF 1		