


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
150	5TH	480	60	3	500
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		715			
SYMBOL	TCI PART NUMBER				
LR	KDRX5T				
TR	KTR150A65HG				
CAP1-7 (20KVAR)	23123				
CAP8 (10KVAR)	16448				
Fu1, 2, 3	13232				

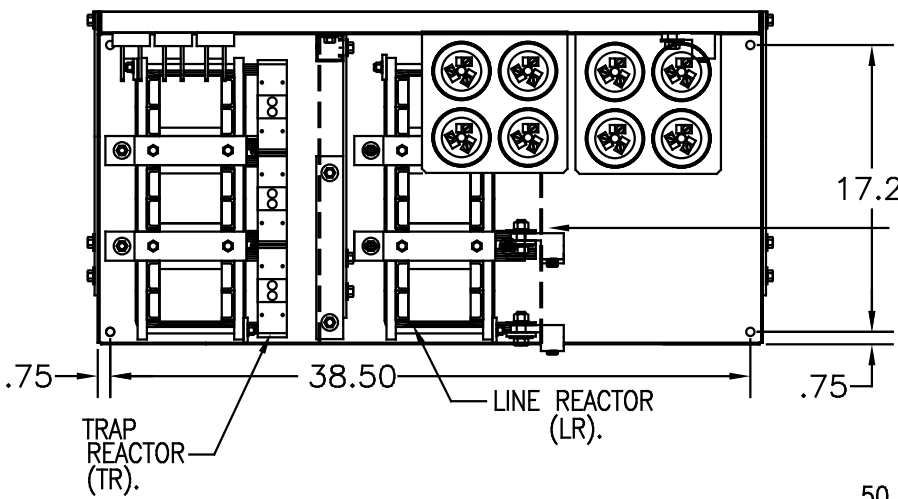

CUSTOMER CONNECTIONS:




L1 L2 L3

T1 T2 T3

SEE 25078 FOR SCHEMATIC

CUSTOMER CONNECTIONS:
WIRE RANGE-TWO 600MCM-2
TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:
WIRE RANGE-TWO 600MCM-2
TIGHTENING TORQUE 500 IN-LB.

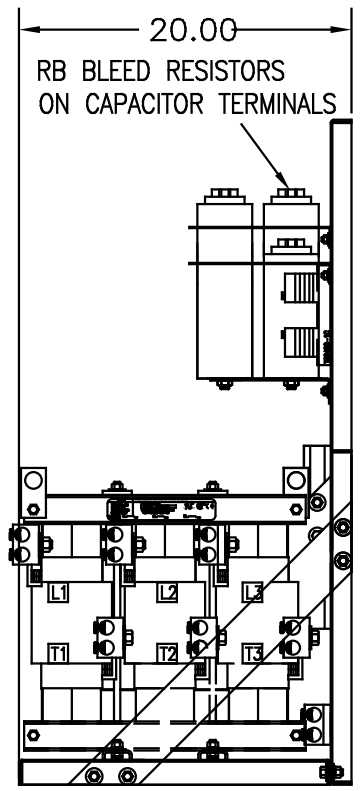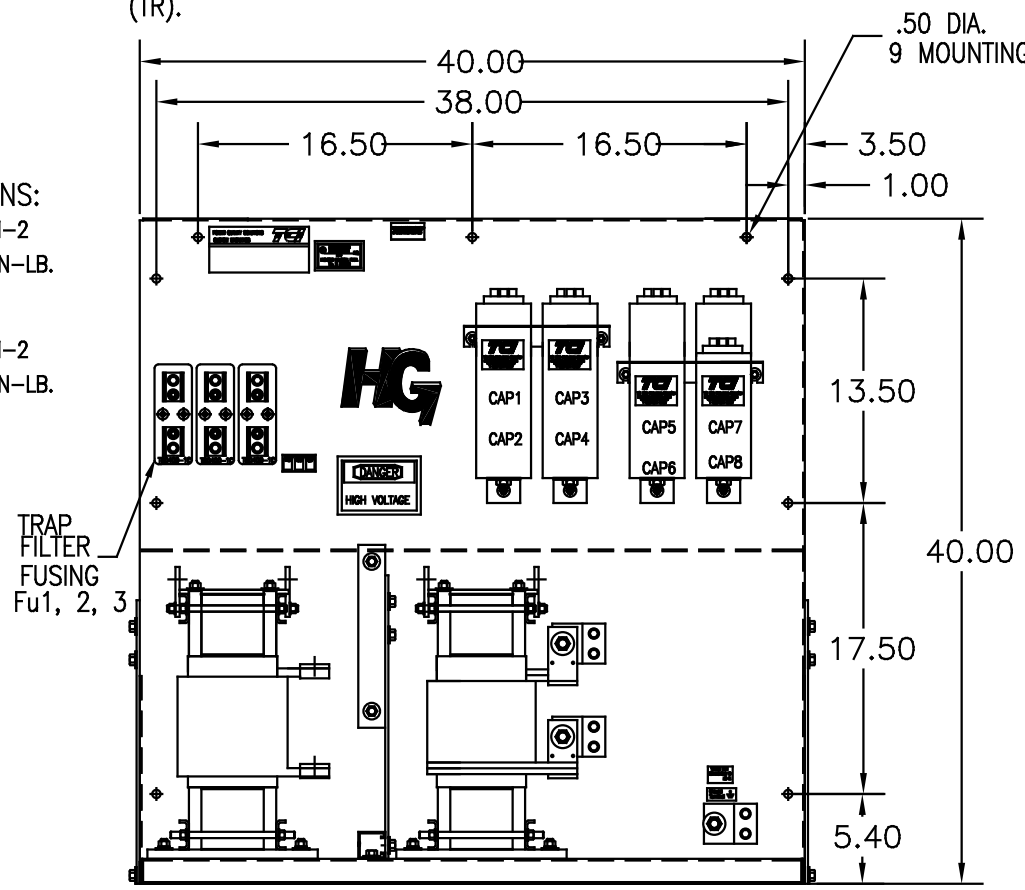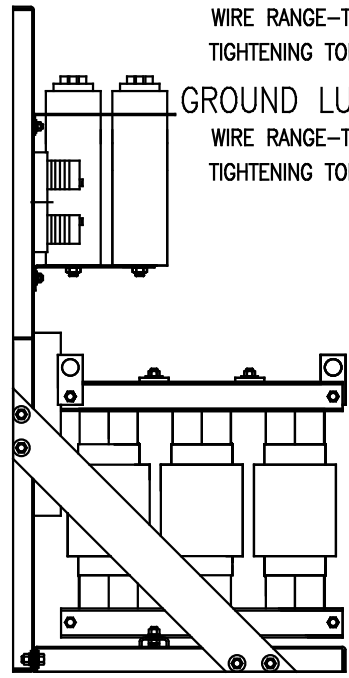

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (UNLESS AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ±.03			
				.XXX±.01			
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1/2°			
NO.	REVISION	DATE	BY	DESIGNER	DATE	DRWG. NO.	REV.
				DSW	05/12/05	102684DG	C
				SCALE TO FIT			