

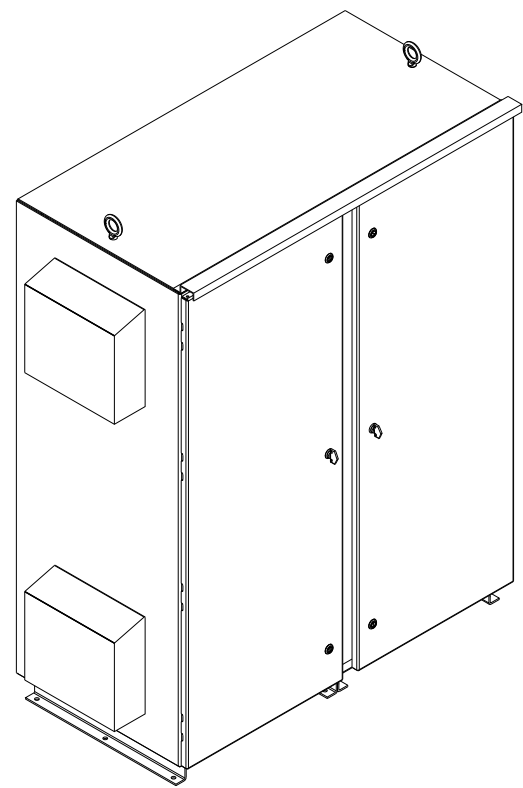


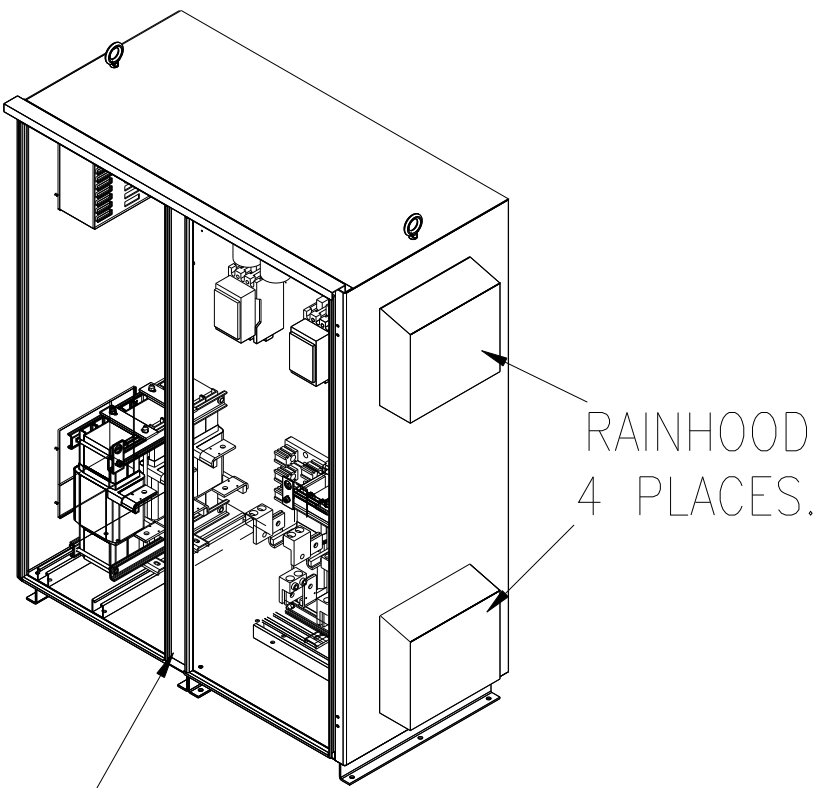

SEE DWG# 26753 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.



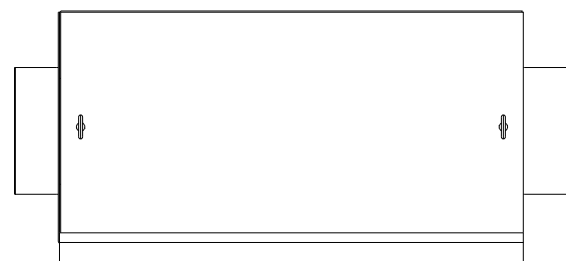


RAINHOOD
4 PLACES.

REMOVEABLE
CENTER CHANNEL



INSIDE
DOOR

SIDE VIEW

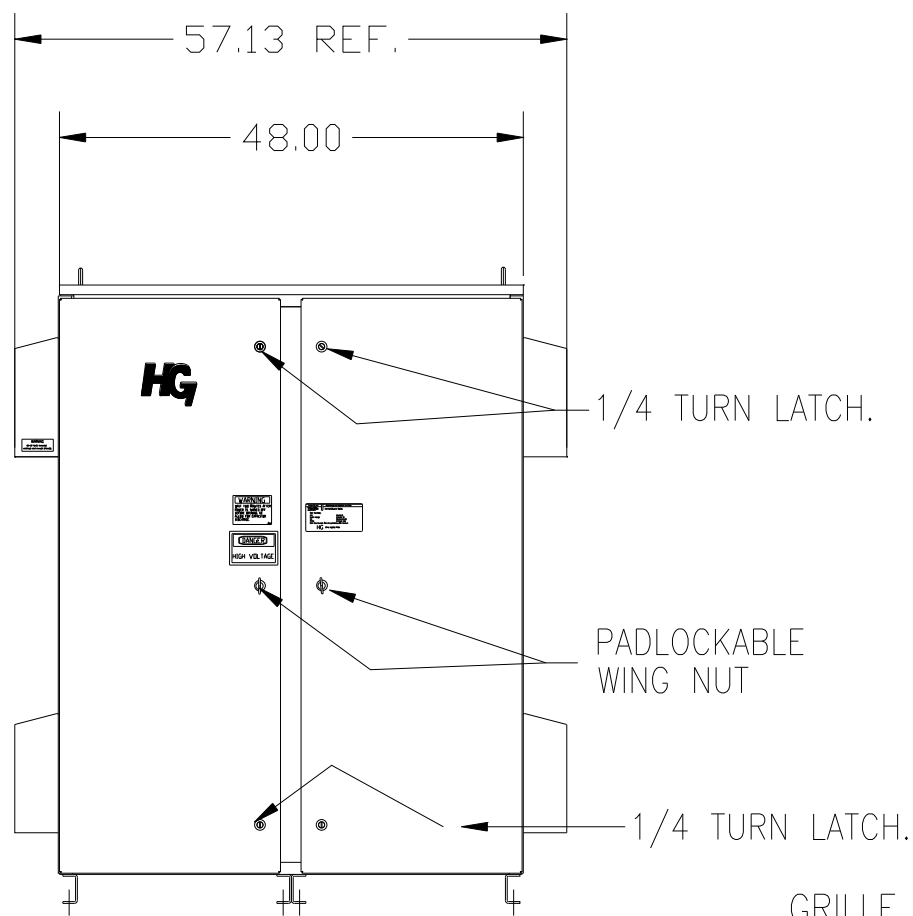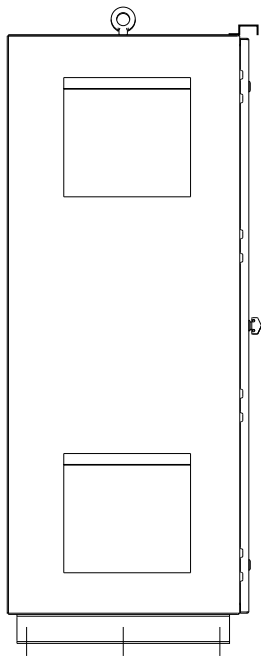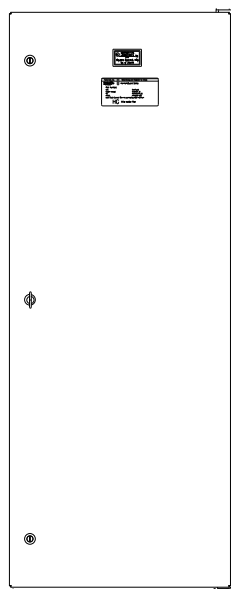

FRONT VIEW
WITH DOORS.

FRONT VIEW
WITHOUT DOORS

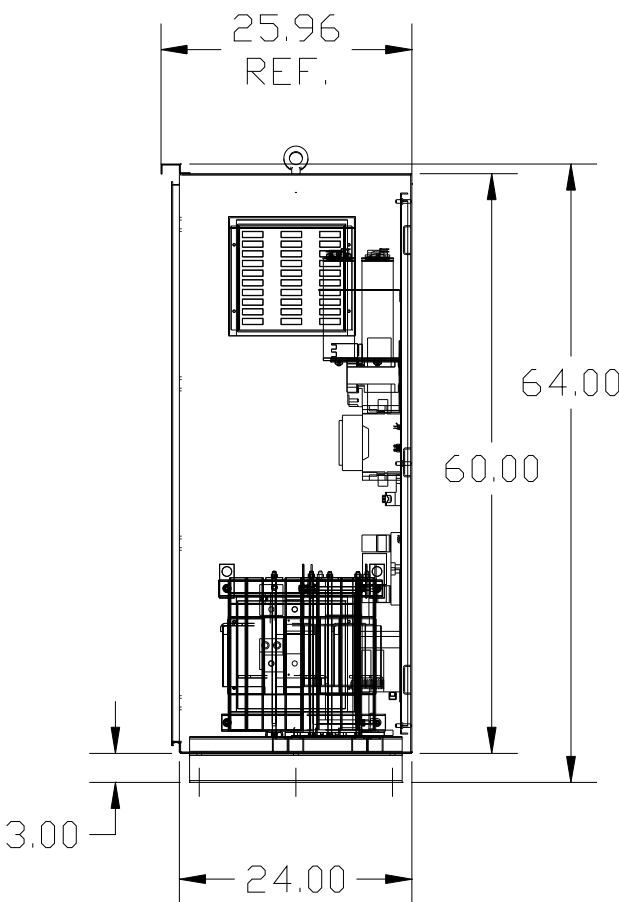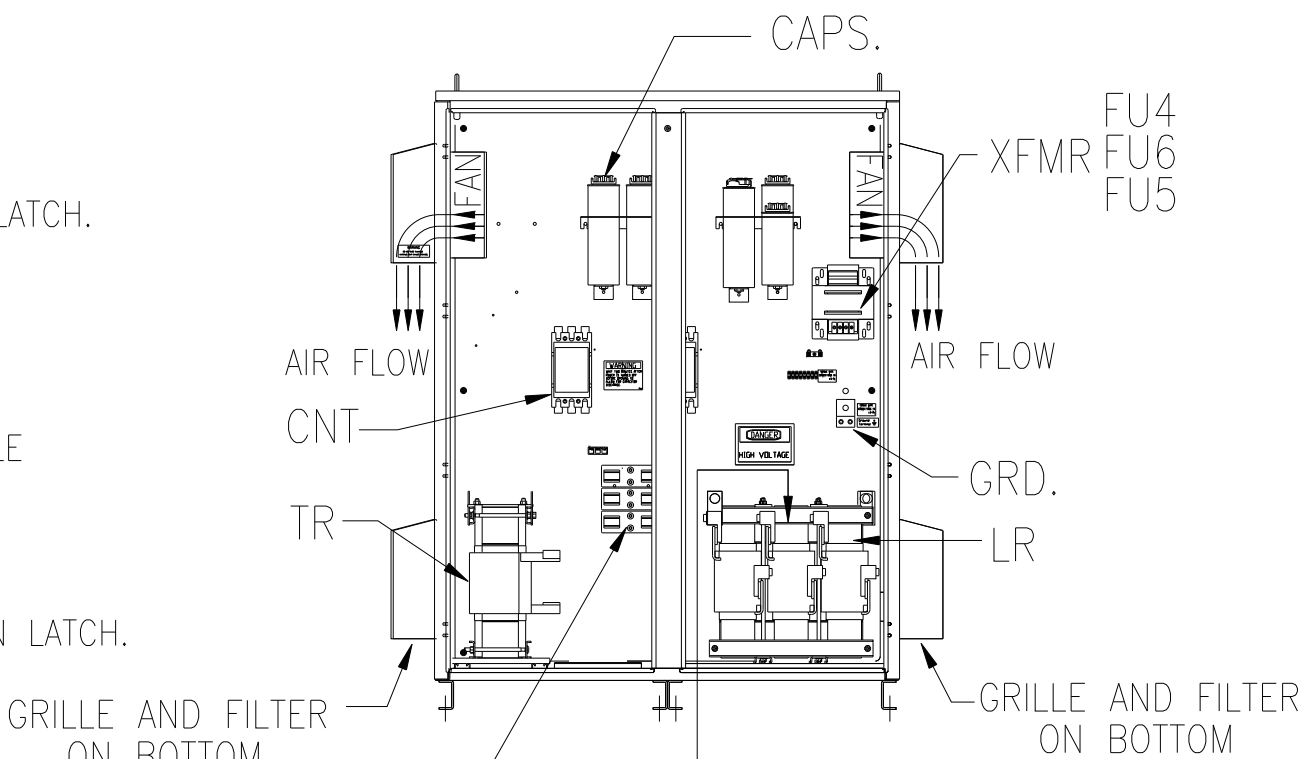

SIDE VIEW


SYMBOL	TCI PART NUMBER
LR	KDRX5T
TR	KTR150A65HG
CAP.1,2,3,4,5,6,7 (20 KVAR)	KCAP20A6B
CAP.8 (10 KVAR)	KCAP10A6B
XFMR.	24113
Fu1;2;3	13232
Fu4,6	14106
Fu5	24110
CNT	23368

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
150	5TH	480	60	3	500
ENCLOSURE	TYPE 3R- COLOR, WHITE				
FEATURES	CONTACTOR				
APPROX.WT. LBS	1019				

.50 DIA HOLES
12 PLACES.

GROUND LUG:
WIRE RANGE-TWO 600MCM-2
TIGHTENING TORQUE 500 IN-LB.

SUGGESTED CUSTOMER WIRE ENTRY
AND EXIT LOCATION

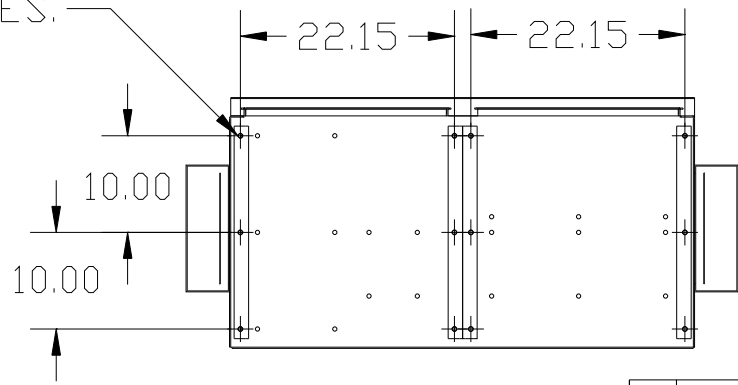

BOTTOM VIEW

CUSTOMER INPUT/OUTPUT
CONNECTIONS:
WIRE RANGE-TWO 600MCM-2
TIGHTENING TORQUE 500 IN-LB.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ±.12 .XXX±.06	
				FRACTIONAL ± 1/32	
				ANGULAR ± 1/2°	DRN. BY DSW DATE 9/18/08 DWG. NO. 103684DG
NO	REVISION	DATE	BY	SCALE TO FIT	APRVD. SHT. 1 of 1