


| UNIT SPECIFICATIONS: |                 |                  |    |       |     |
|----------------------|-----------------|------------------|----|-------|-----|
| KVAR                 | HARMONIC        | VOLT             | HZ | PHASE | HP  |
| 150                  | 5TH             | 600              | 60 | 3     | 500 |
| ENCLOSURE            |                 | WHITE OPEN PANEL |    |       |     |
| APPROX.WT. LBS.      |                 | 930              |    |       |     |
| SYMBOL               | TCI PART NUMBER |                  |    |       |     |
| LR                   | KDRY41T         |                  |    |       |     |
| TR                   | KTR150C65HG     |                  |    |       |     |
| CAP1-7 (20KVAR)      |                 | 18612            |    |       |     |
| CAP8 (10KVAR)        |                 | 17816            |    |       |     |
| Fu1, 2, 3            |                 | 12462            |    |       |     |



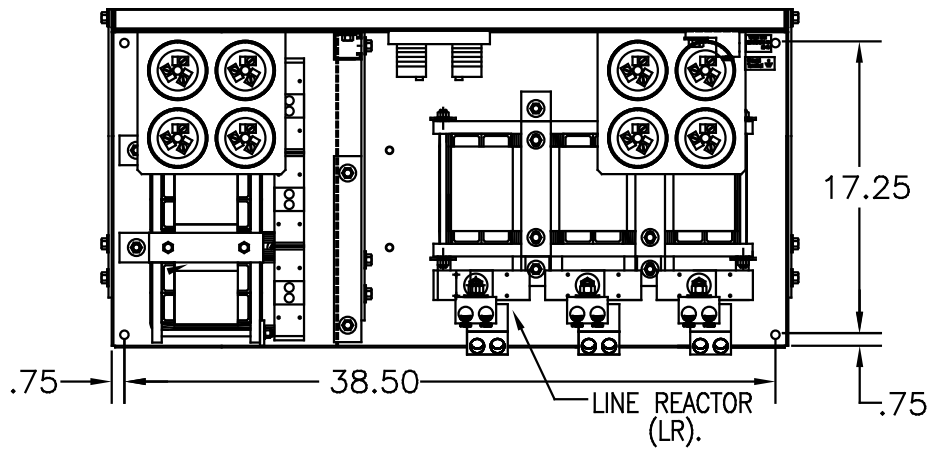


CUSTOMER CONNECTIONS:  
 L1 L2 L3  
 T1 T2 T3

SEE 25115 FOR SCHEMATIC

CUSTOMER CONNECTIONS:  
 WIRE RANGE-TWO 600MCM-2  
 TIGHTENING TORQUE 500 IN-LB.

GROUND LUG:  
 WIRE RANGE-TWO 600MCM-2  
 TIGHTENING TORQUE 500 IN-LB.

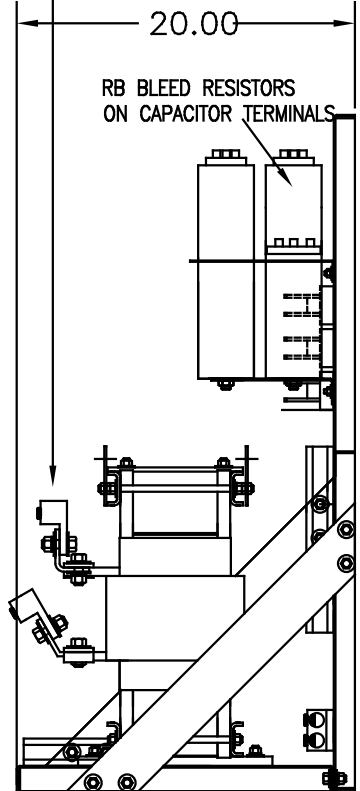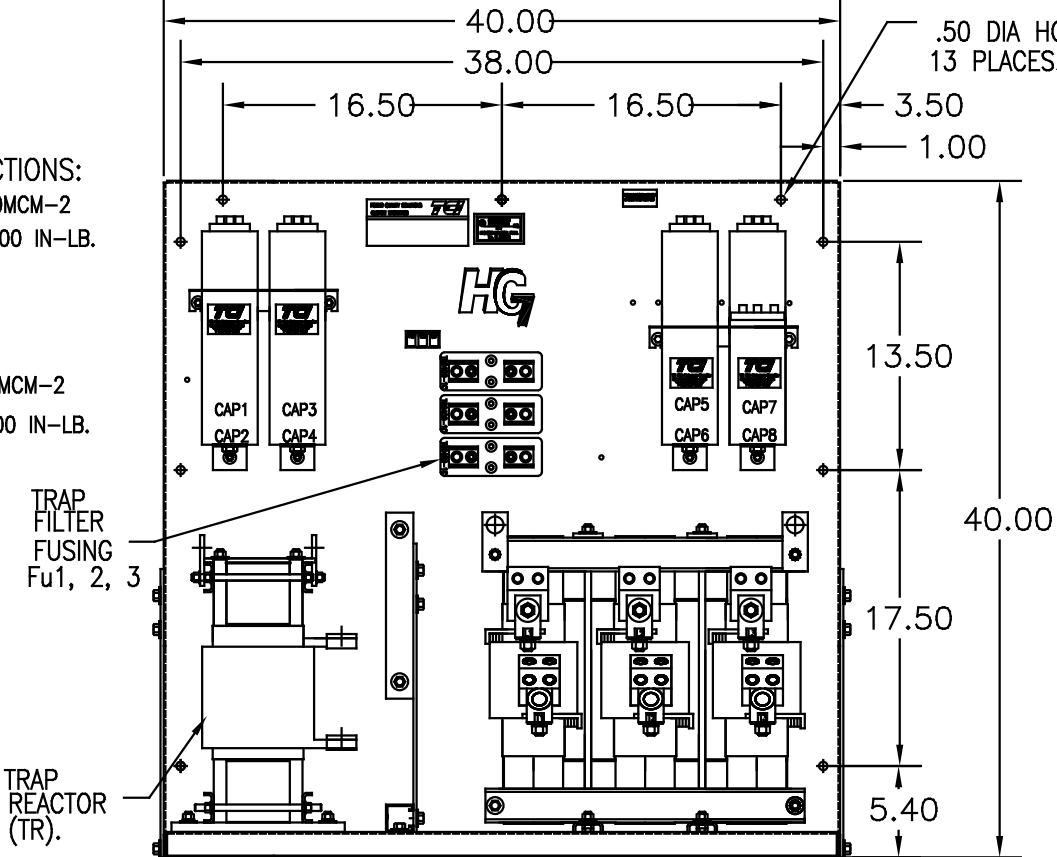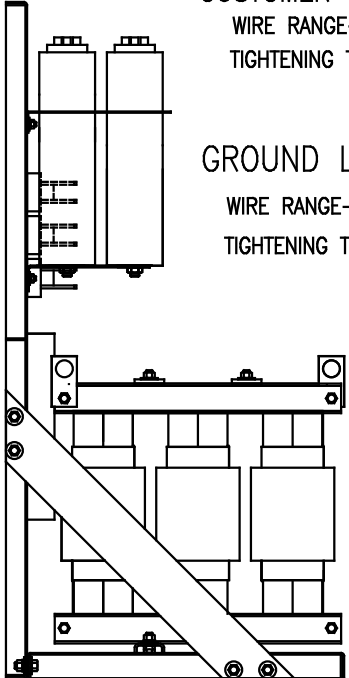

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

| NO | REVISION | DATE | BY | TOLERANCES (UNLESS AS NOTED) | DESIGN |
|----|----------|------|----|------------------------------|--------|
|    |          |      |    | .XX ±.03                     |        |
|    |          |      |    | .XXX ±.01                    |        |
|    |          |      |    | FRACTIONAL ± 1/32            |        |
|    |          |      |    | ANGULAR ± 1/2°               |        |
|    |          |      |    | NO                           |        |

|  |                  |  |                     |
|--|------------------|--|---------------------|
|  |                  | 7878 N. 86th STREET<br>MILWAUKEE, WI 53224 |                     |
| HG500CW00ST HG7 STANDARD<br>500HP, 600/3/60 OPEN |                  |  |                     |
| DESIGNED BY<br>DSW                               | DATE<br>06/02/09 | DRAWING NO.<br>C 102698DG                  | SHEET NO.<br>1 OF 1 |