


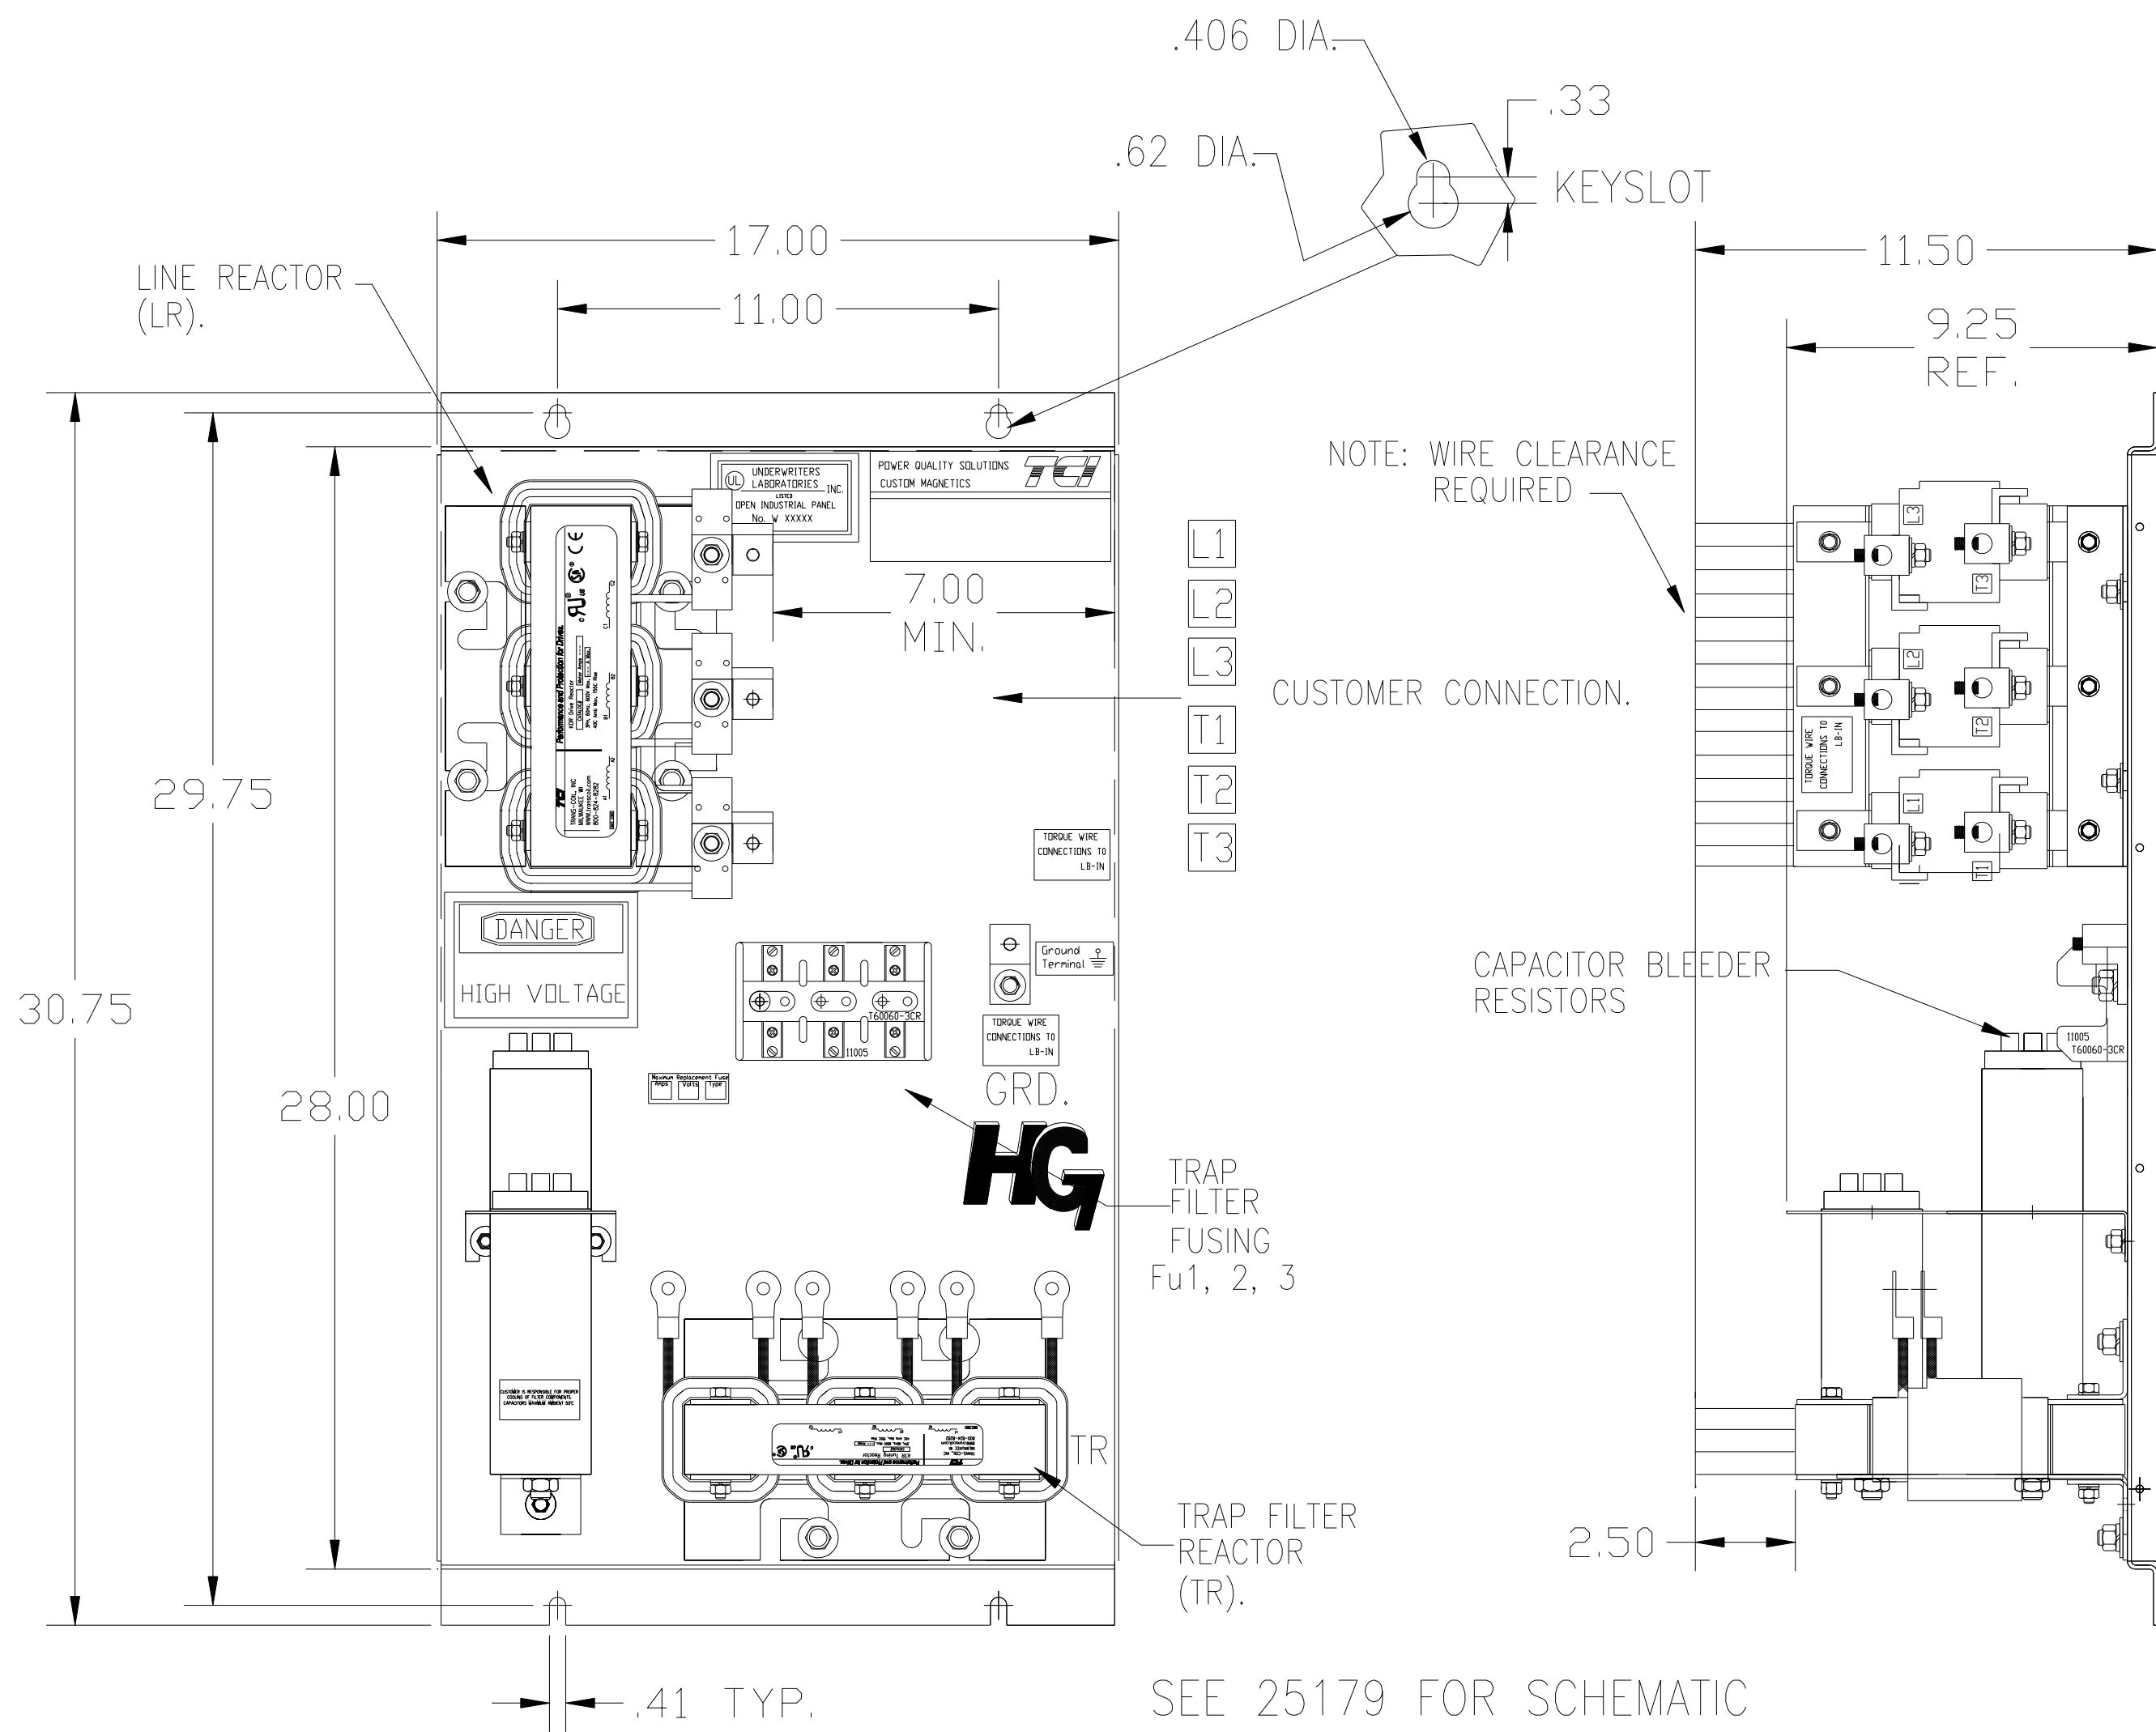

UNIT SPECIFICATIONS:					
KVAR HARMONIC	VOLT	HZ	PHASE	HP	
15	5TH	240	60	3	50
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		120			

SYMBOL	TCI PART NUMBER
LR	KDRG21T
TR	KTR15B65HG
CAP1 10 KVAR	KCAP10B6B
CAP2. 5 KVAR	KCAP5B6B
Fu1, 2, 3	11006

CUSTOMER CONNECTIONS:
WIRE RANGE-250MCM-6
TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
WIRE RANGE-250MCM-6
TIGHTENING TORQUE 275 IN-LB.

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C
CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL		
				.XX ±.03 .XXX±.01		
				FRACTIONAL ± 1/32		
△	2516, CAPS WERE 17812			ANGULAR ± 1/2°	DRN. BY DSW	DATE 04/14/05
	AND 17813	9/30/07	RJC		SCALE TO FIT	DWG. NO. 102518DG
NO	REVISION	DATE	BY			B 102518DG SHT.1 OF1