



CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.






NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.
SEE DWG# 26898 FOR SCHEMATIC

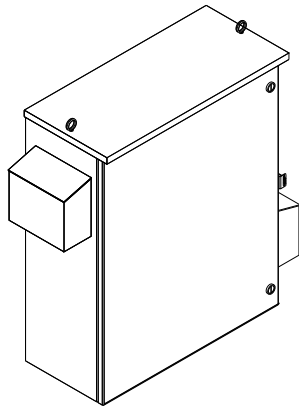

SIDE VIEW



INSIDE DOOR

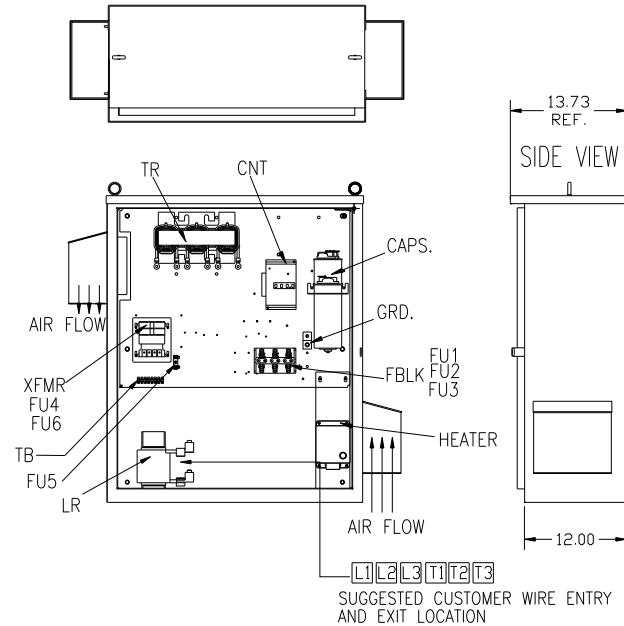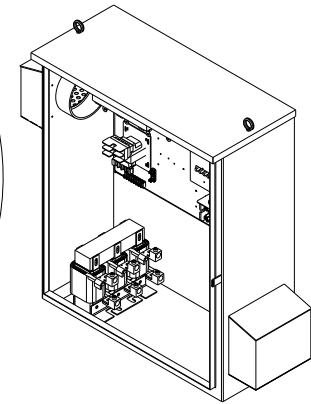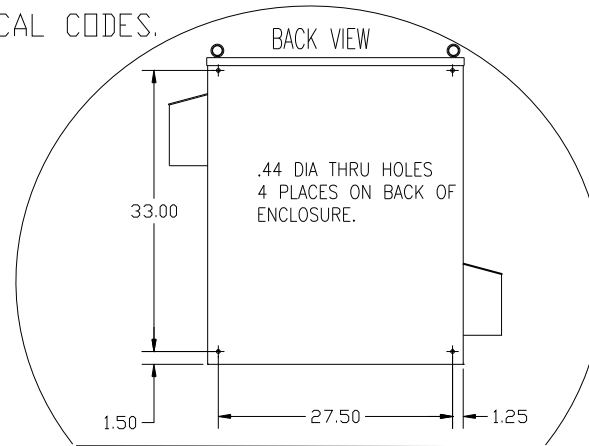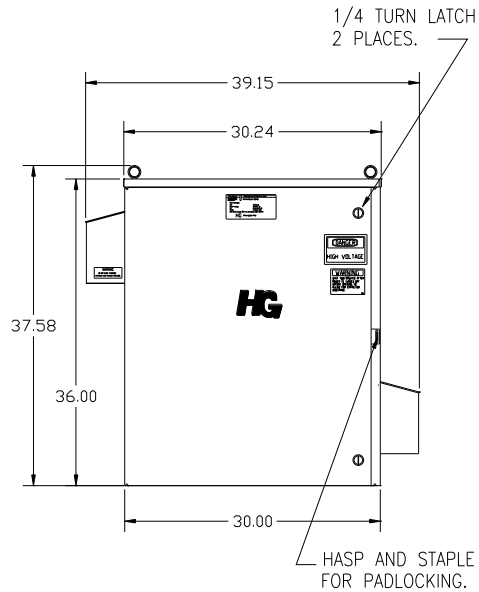

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
15	5TH	240	60	3	50
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX. WT. LBS.		220			

HG50CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
TRANSFORMER XFMR	X
TRANSFORMER FUSING FU4,6	X
TRANSFORMER FUSING FU5	X
CONTACTOR CNT	X
HEATER	X

CUSTOMER CONNECTIONS:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			HG50BW03STCH, 50HP 240/3/60 UL TYPE 3R
				XX ±.12			
				XXX ±.03			
3033 UPDATE LAYOUT				FRACTIONAL ± 1/32			SCALE TO FIT
A 2641 ADD EYEBOLTS				ANGULAR ± 1/2°			
NO.	REVISION	DATE	BY			SHT. 1 of 1	