


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
180	5TH	480	60	3	600
OPEN		WHITE PANEL			
APPROX.WT. LBS.		950			

SYMBOL	TCI PART NUMBER
LR	KDRY1T
TR	KTR180A65HG
CAP1 - 9 (20KVAR)	27609
Fu1, 2, 3	12596



ALTERNATE	TCI PART NUMBER
CAP1 - 9 (20KVAR)	KCAP20A6B

SEE 25078 FOR SCHEMATIC

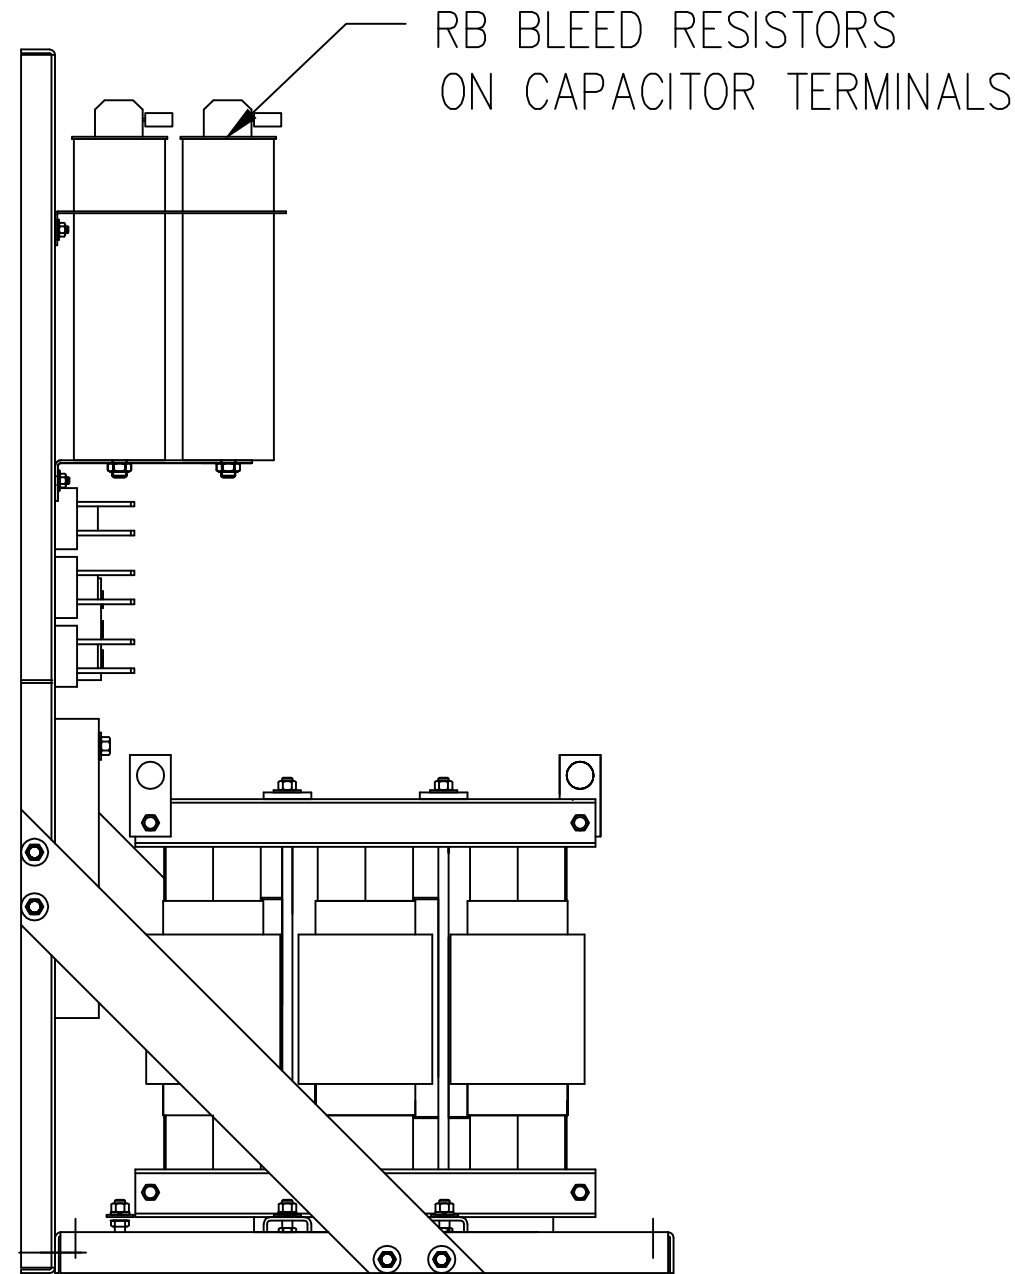

.50 DIA. HOLES
13 PLACES


TRAP
FILTER
FUSING
Fu1, 2, 3

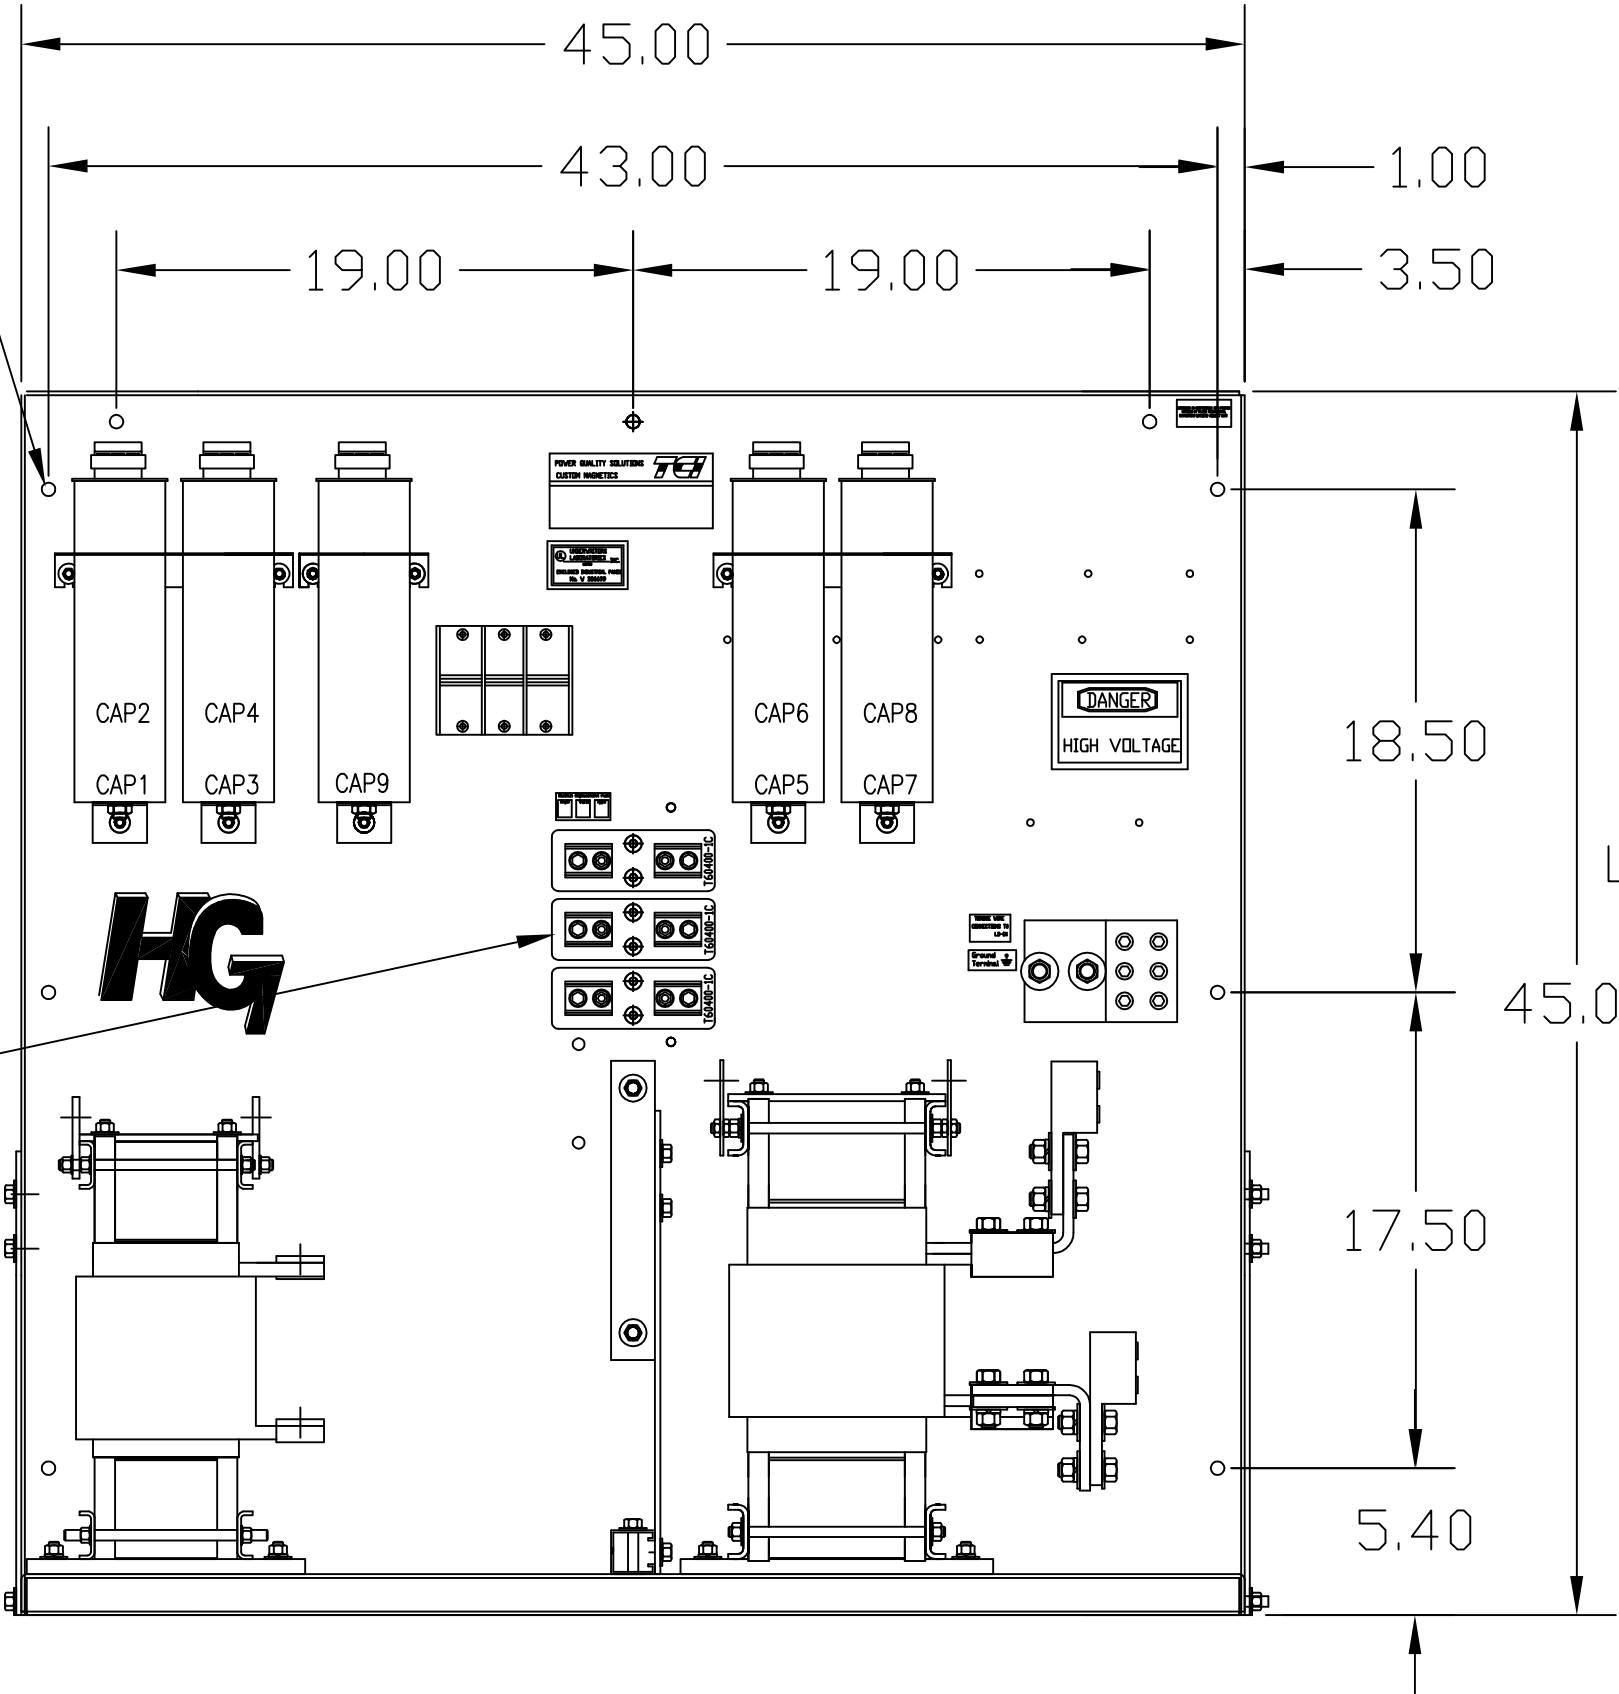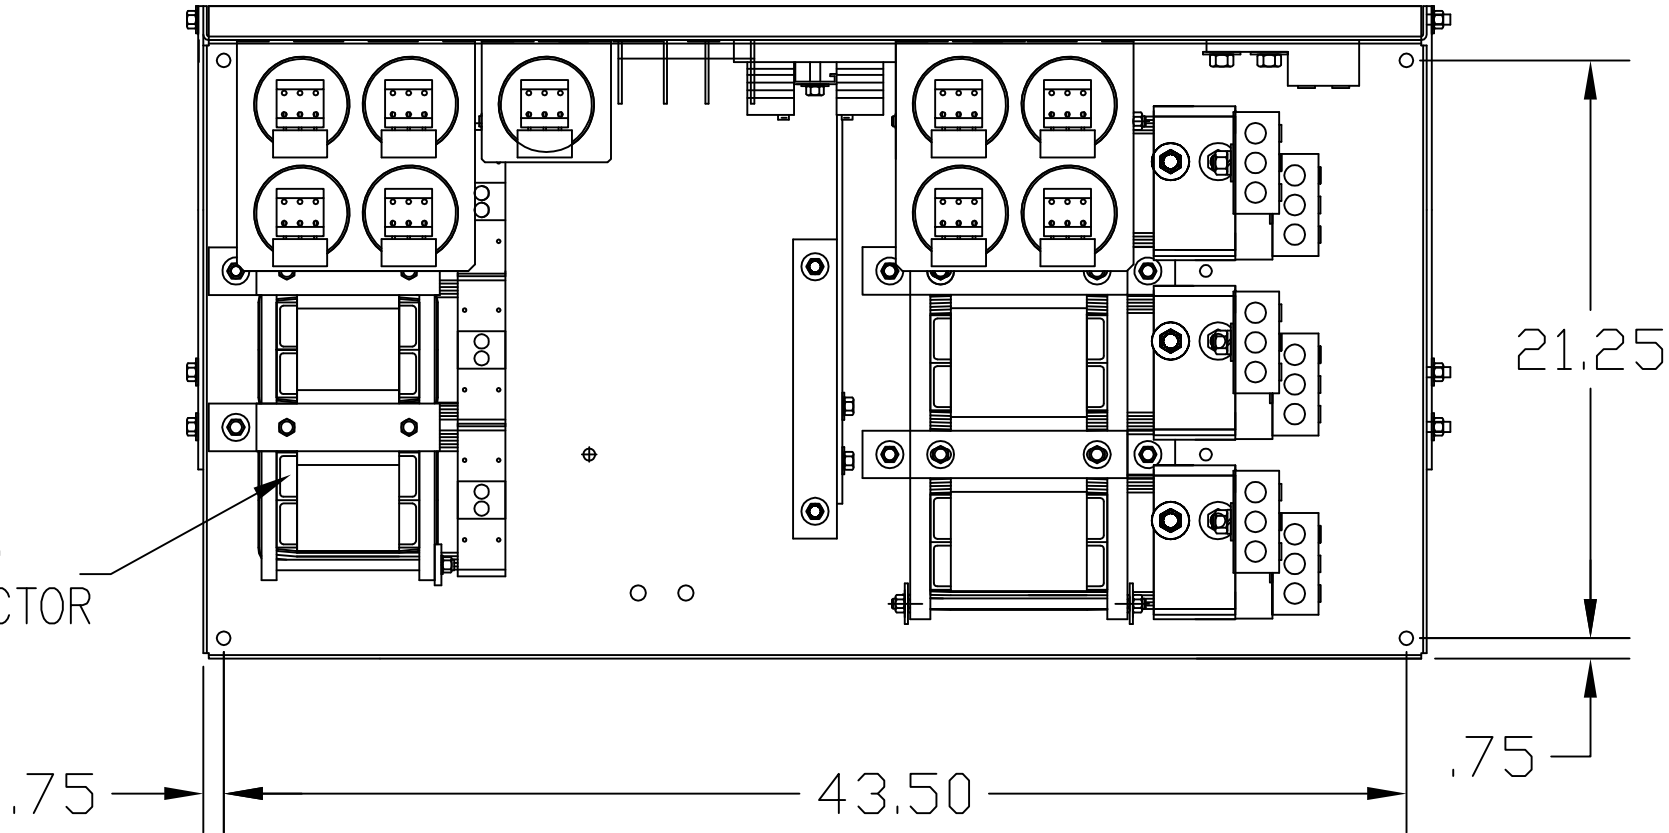

CUSTOMER CONNECTIONS:
WIRE RANGE-THREE 600MCM-2
TIGHTENING TORQUE 375 IN-LB.

GROUND LUG:
WIRE RANGE-THREE 600MCM-2
TIGHTENING TORQUE 375 IN-LB.

CUSTOMER CONNECTIONS:
L1 L2 L3
T1 T2 T3

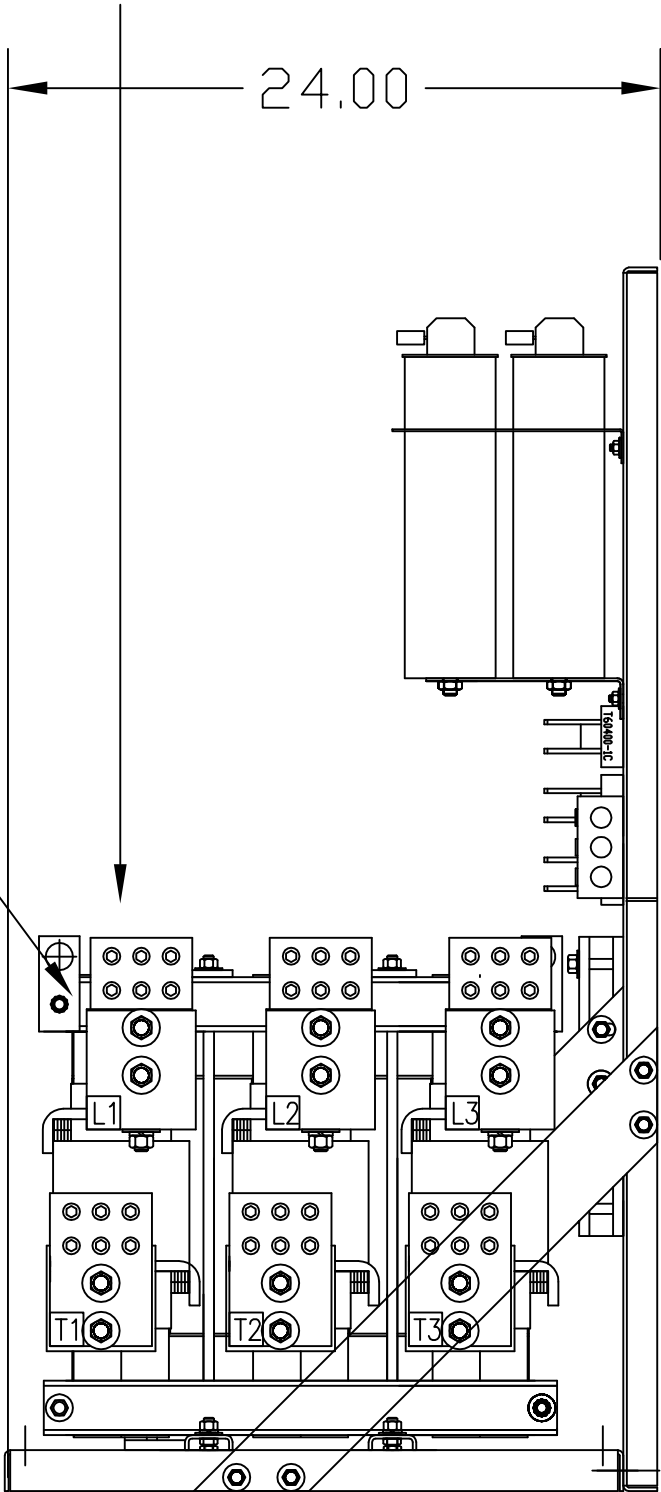

CUSTOMER IS RESPONSIBLE FOR PROPER
COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)		7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			
				.XX ± .03		HG600AW00ST HG7 STANDARD 600HP, 480/3/60 OPEN	
				.XXX± .01			
B 2920 ASC CAP CHANGE				10/10/13	MJS	FRACTIONAL ± 1/32	DRN. BY DSW DATE 05/25/05 DWG. NO. 102686DG
△ 2516, CAP WAS 23123				9/30/07	RJC	ANGULAR ± 1/2°	
NO	REVISION		DATE	BY	SCALE TO FIT		SHT.1 OF1