
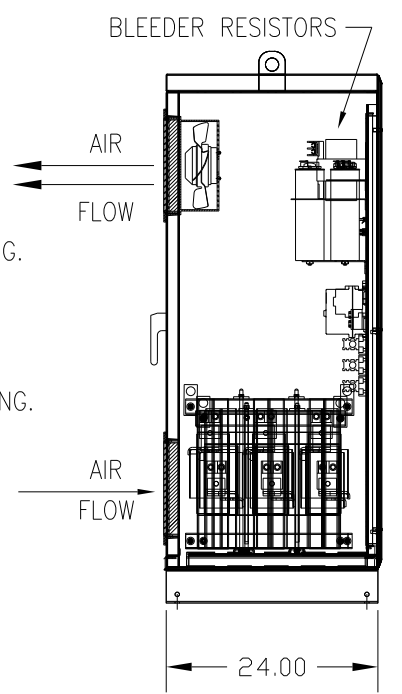
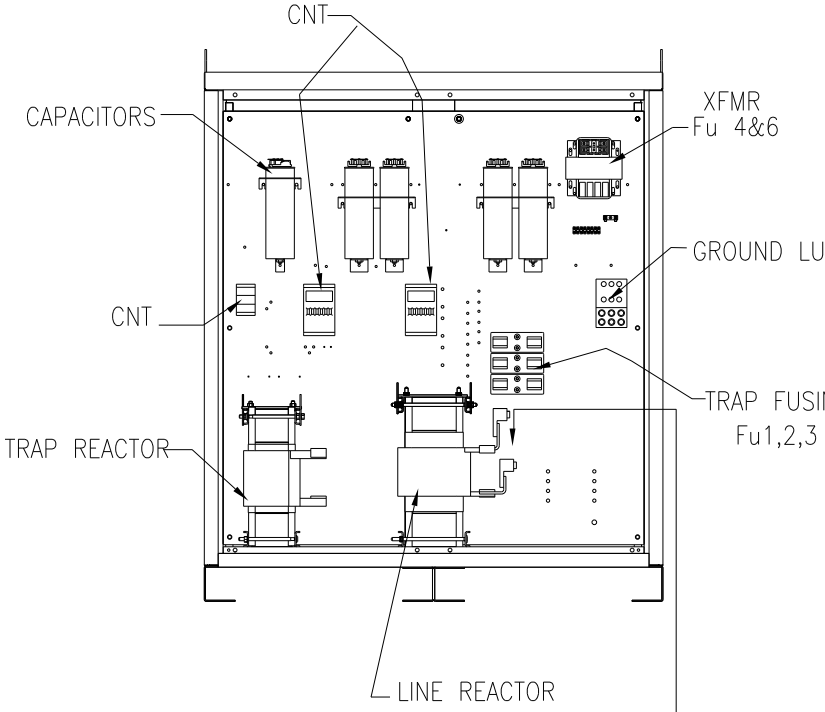


UNIT SPECIFICATIONS:						
KVAR	HARMONIC	VOLT	HZ	PHASE	HP	
180	5TH	600	60	3	600	
ENCLOSURE		NEMA 1				
FEATURES		WITH CONTACTOR				
APPROX.WT. LBS.		1415				

SYMBOL	TCI PART NUMBER	
LR	KDRY42T	
TR	KTR180C65HG	
(20 KVAR) 9 PLACES.	KCAP20C6B	
Fu1a;2a;3a	13232	
Fu4,6	24390	
Fu5	23977	
CNT	2 PLACES.	19246
CNT	1 PLACE.	25315

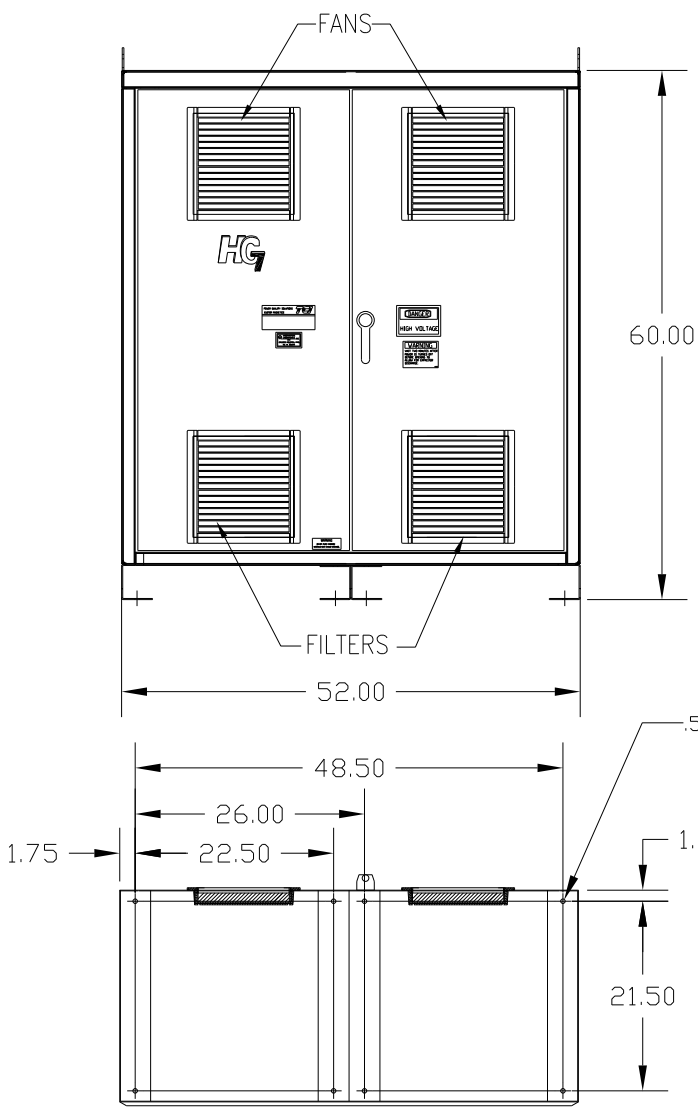

CUSTOMER CONNECTIONS:  

L1	L2	L3
T1	T2	T3

CUSTOMER CONNECTIONS:  
 WIRE RANGE-THREE 600MCM-2  
 TIGHTENING TORQUE 375 IN.-LB.

GROUND LUG:  
 WIRE RANGE-THREE 600MCM-2  
 TIGHTENING TORQUE 375 IN.-LB.

SEE DWG# 26973-1 FOR SCHEMATIC  
 CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO  
 MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL			HG600CW01STC, HG7 600 HP, 600/3/60, TYPE 1
				.XX ±.03			
				.XXX ±.01			
				FRACTIONAL			DRN. BY DSW DATE 03/19/09 DWG. NO. 103564DG
				± 1/32			
2786	REMOVE COLOR	11/14/11	DSW	ANGULAR			SCALE TO FIT
NO	REVISION	DATE	BY	± 1/2°			