


UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	480	60	3	60
OPEN		GALVANIZED PANEL			
APPROX.WT. LBS.		135			

SYMBOL	TCI PART NUMBER
LR	KDRG2T
TR	KTR20A65HG
CAP. 20kVAR	27609
Fu1, 2, 3	12515

ALTERNATE	TCI PART NUMBER
CAP (20 KVAR)	KCAP20A6B

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS.  
CAPACITORS MAXIMUM AMBIENT 50°C

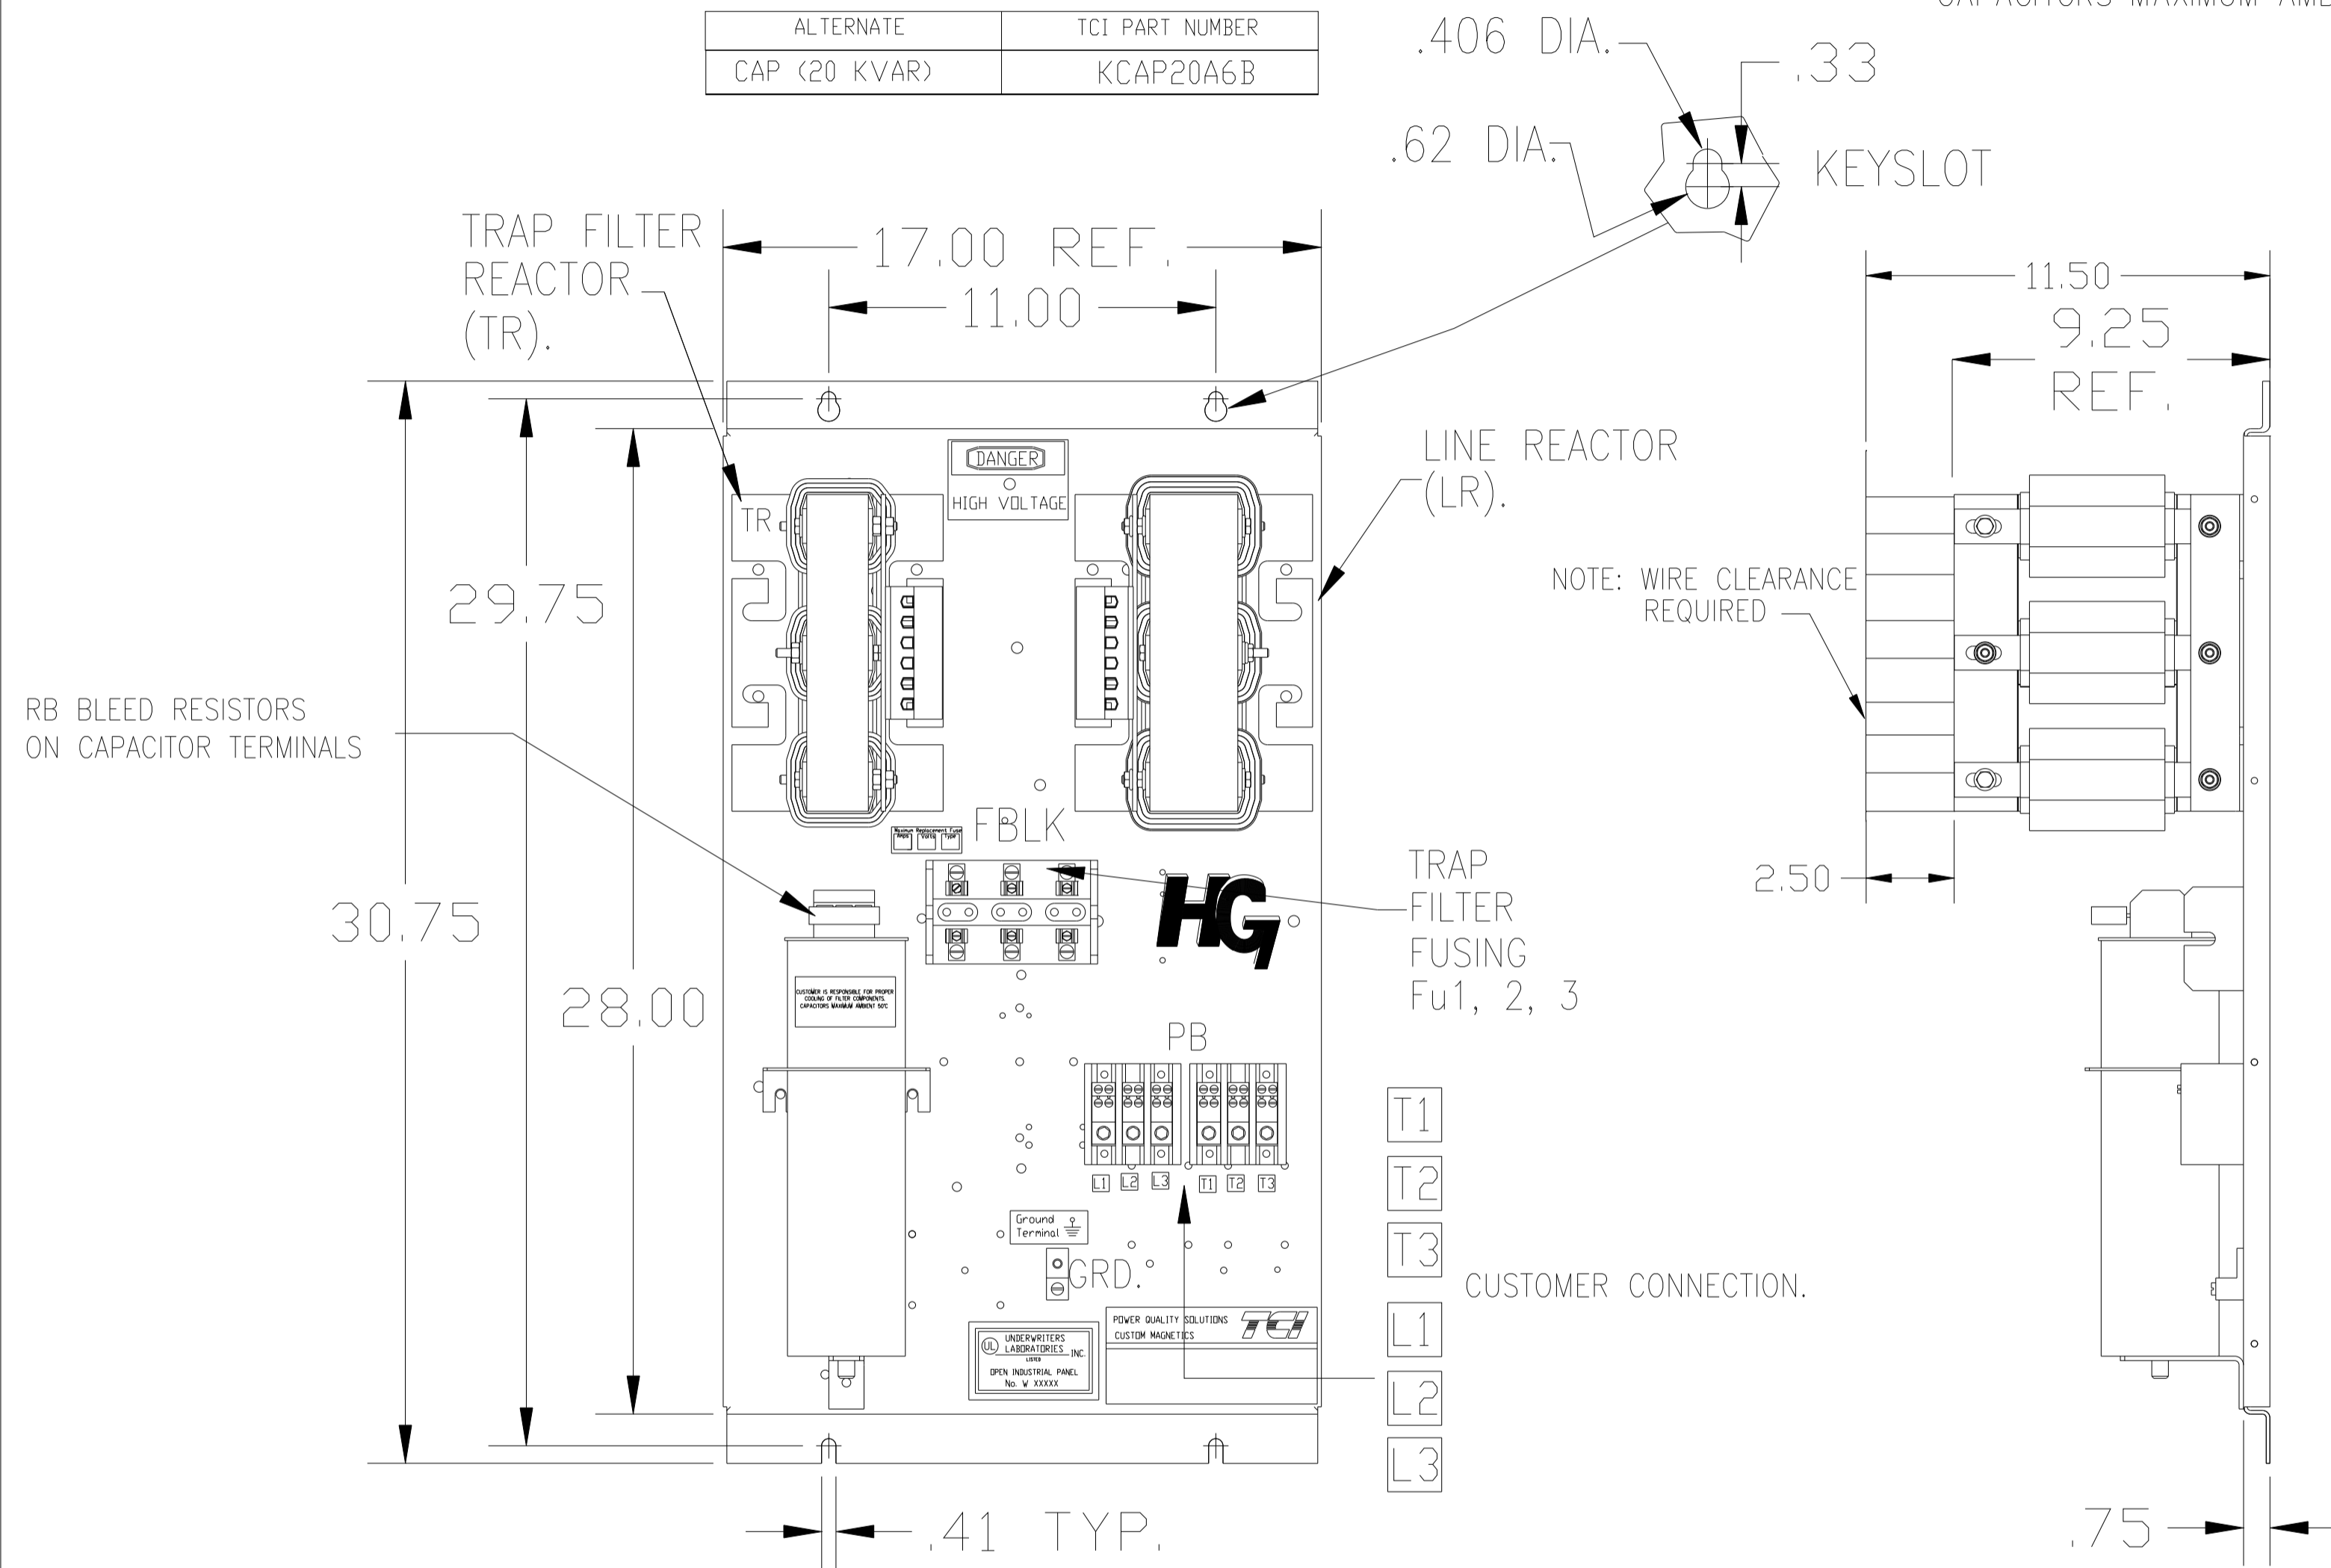

- T1
  - T2
  - T3
  - L1
  - L2
  - L3
- CUSTOMER CONNECTION.

PB--POWER INPUT BLOCK:

GROUND LUG:  
WIRE RANGE--1/0 TO #14 AWG.  
1/0 AWG thru 2 AWG 50 IN-LBS. MAX.  
4 AWG thru 6 AWG 45 IN-LBS. MAX.  
8 AWG 40 IN-LBS. MAX.  
10 AWG thru 14 AWG 35 IN-LBS. MAX.

2/0 AWG thru 6 AWG 120 IN-LBS. MAX.  
8 AWG 40 IN-LBS. MAX.  
10 AWG thru 14 AWG 35 IN-LBS. MAX.

SEE 25077 FOR SCHEMATIC

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

			TOLERANCES (EXCEPT AS NOTED)	7878 N. 86th STREET MILWAUKEE, WI 53224	
			DECIMAL		
			.XX ± .03	HG60AW00ST, HG7 STANDARD 60HP, 480/3/60, OPEN	
			.XXX ± .01		
			FRACTIONAL	DRN BY DSW DATE 03/03/05 DWG. NO. 102543DG SCALE TO FIT APRVD. C	
			± 1/32		
A	2900 CHG TO ASC CAPS	2/18/13	DSW	SHT. 1 OF 1	
NO	REVISION	DATE	BY		