

SEE DWG# 26689 FOR SCHEMATIC

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	480	60	3	60
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		140			

SYMBOL	TCI PART NUMBER
LR	KDRG2T
TR	KTR20A65HG
CAP. (20 KVAR)	27609
XFMR.	23891
Fu1, 2, 3	12515
Fu4,6	21270
Fu5	13364
CNT	23048

ALTERNATE	TCI PART NUMBER
CAP (20 KVAR)	KCAP20A6B


GROUND LUG:
WIRE RANGE-1/0 TO #14 AWG.

1/0 AWG thru 2 AWG 50 IN-LBS. MAX.

4 AWG thru 6 AWG 45 IN-LBS. MAX.


8 AWG 40 IN-LBS MAX.

10 AWG thru 14 AWG 35 IN-LBS. MAX.

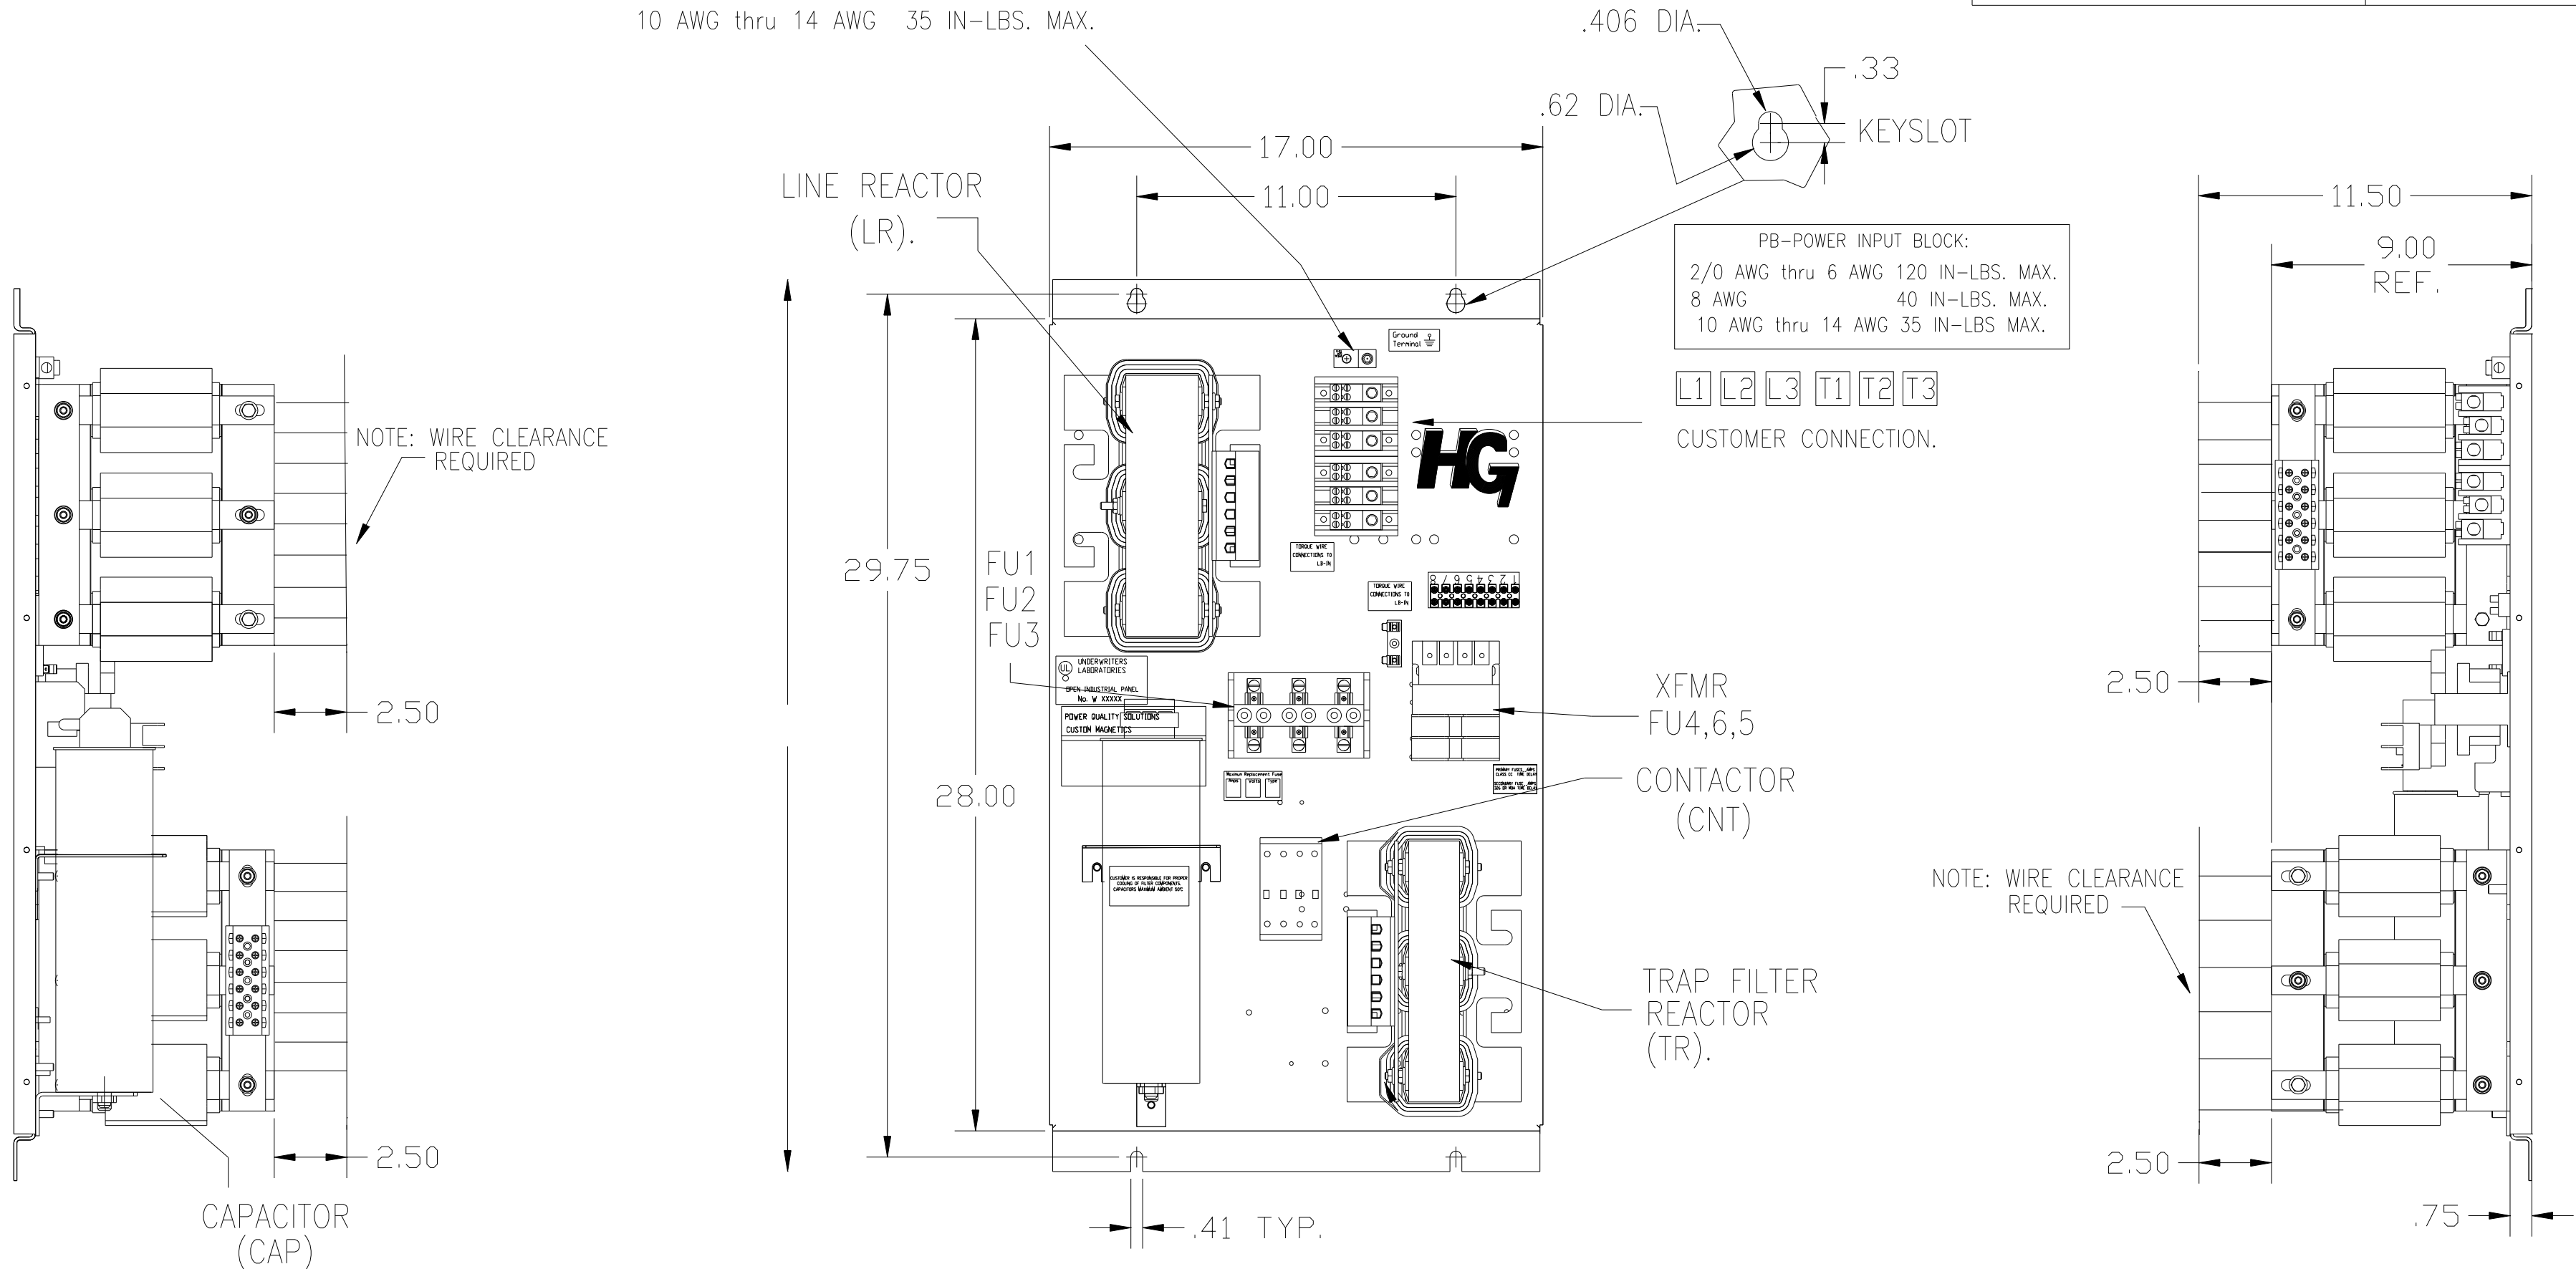

CUSTOMER IS RESPONSIBLE FOR
PROPER COOLING OF FILTER COMPONENTS.
CAPACITORS MAXIMUM AMBIENT 50°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)			7878 N. 86th STREET	
				DECIMAL			MILWAUKEE, WI 53224	
				.XX ± .03	HG60AW00STC, 60HP 480/3/60, OPEN, WITH CNT			
				.XXX± .01				
				FRACTIONAL ± 1/32	DRN. BY DSW		DATE 7/2/08	
B2900 CHG TO ASC CAPS	6/3/13	DSW		ANGULAR ± 1/2°				
NO	REVISION	DATE	BY		SCALE TO SCALE		DVG. NO. C 103532DG	
							SHT. 1 OF 1	

