




CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.
NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.
SEE DWG# 26756 FOR SCHEMATIC

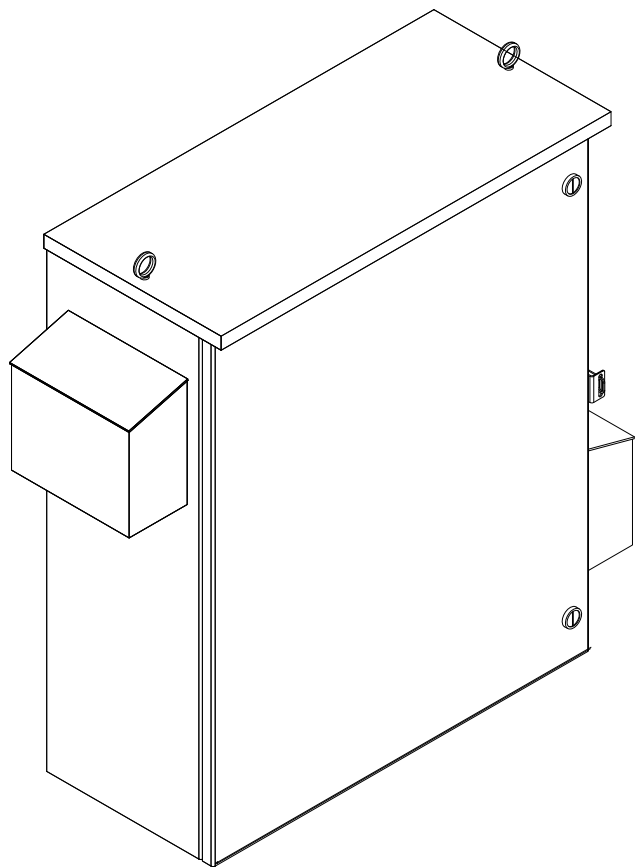

SIDE VIEW

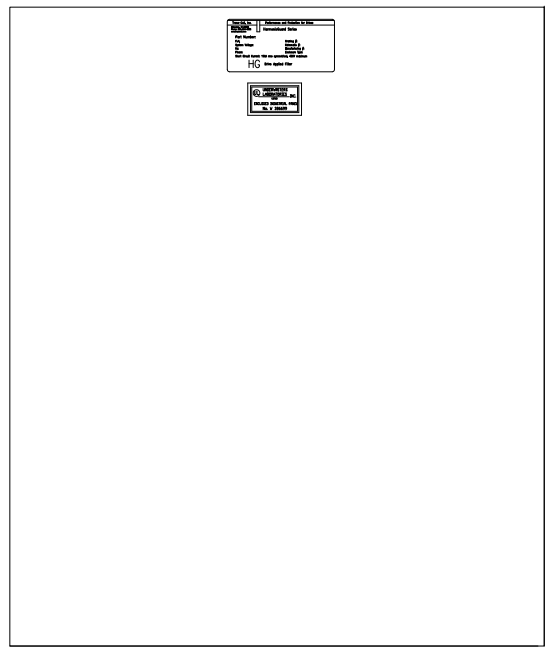


INSIDE DOOR

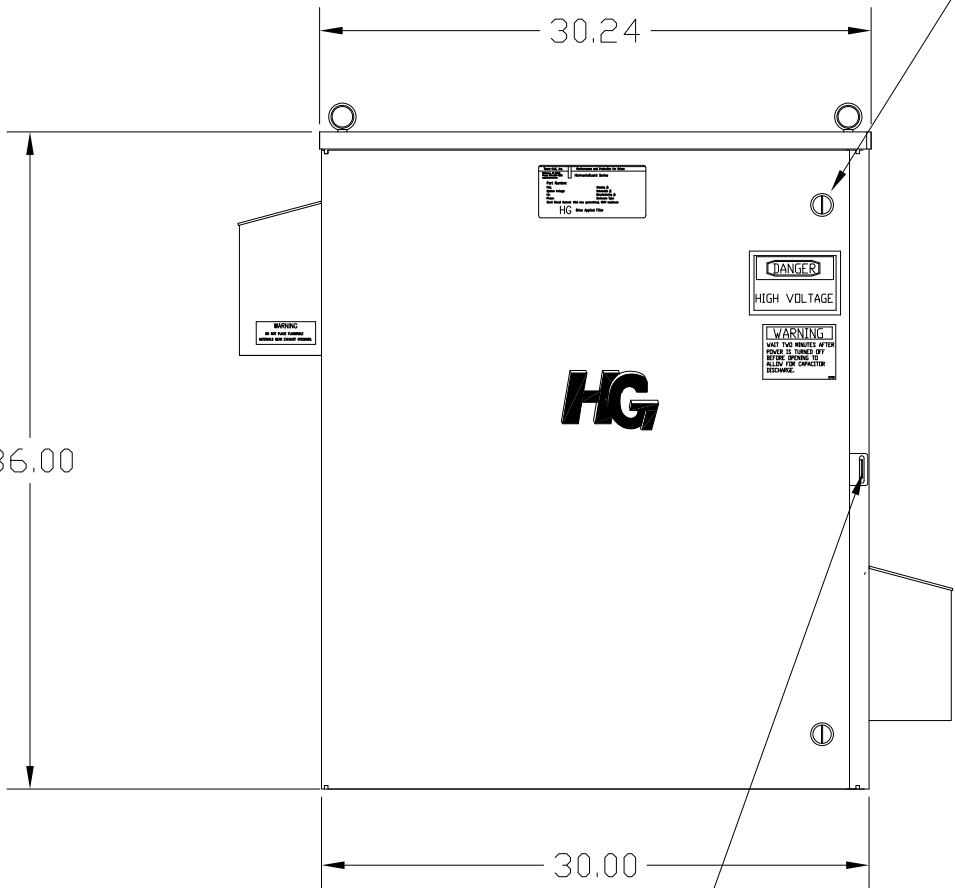


1/4 TURN LATCH
2 PLACES.



HASP AND STAPLE
FOR PADLOCKING.

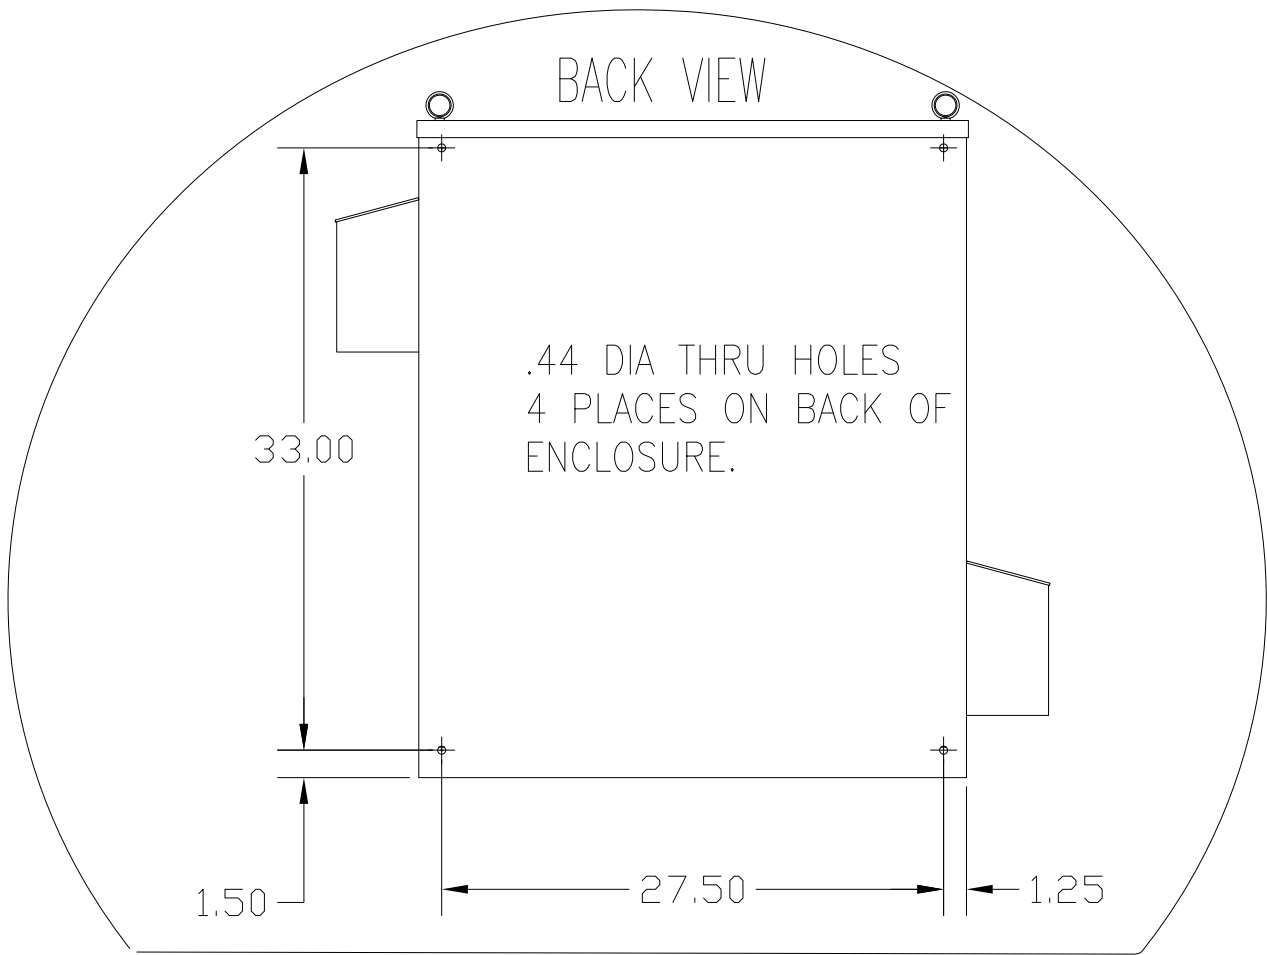

BACK VIEW

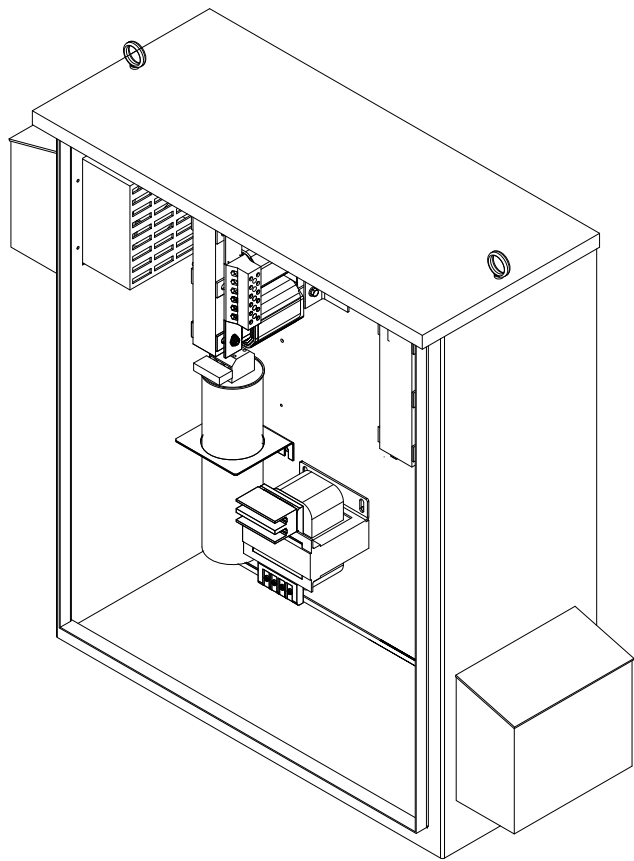

13.73
REF.
SIDE VIEW

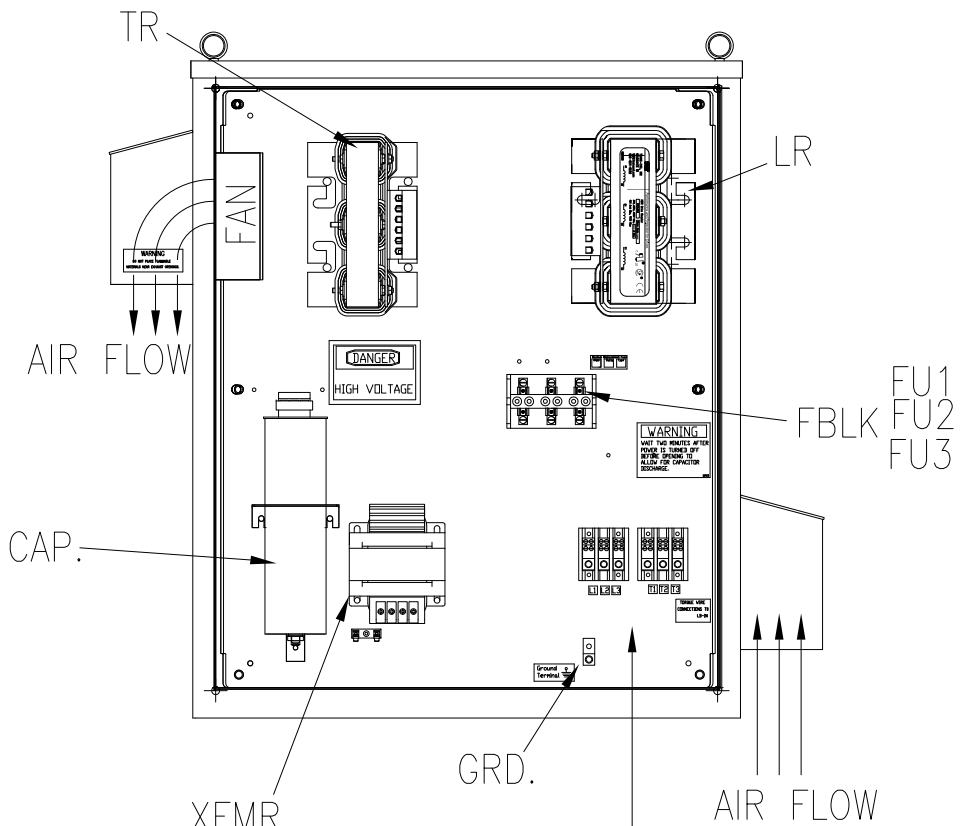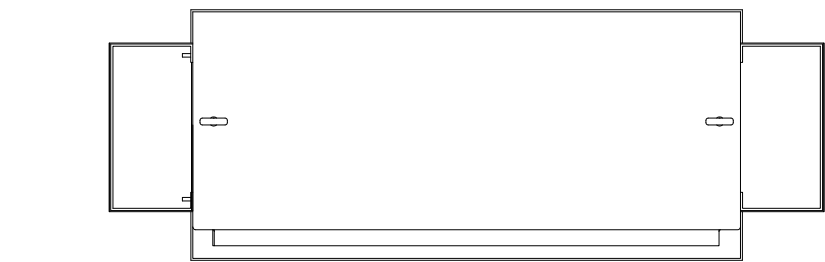

FRONT VIEW
WITHOUT DOOR

L1 L2 L3 T1 T2 T3

SUGGESTED CUSTOMER WIRE ENTRY
AND EXIT LOCATION

GROUND LUG:

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	480	60	3	60
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
APPROX.WT. LBS.		239			

SYMBOL	TCI PART NUMBER
LR	KDRG2T
TR	KTR20A65HG
CAP (20 KVAR)	27609
XFMR.	23896
Fu1, 2, 3	12515
Fu4,6	24009
Fu5	17567

ALTERNATE	TCI PART NUMBER
CAP (20 KVAR)	KCAP20A6B

CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

CUSTOMER CONNECTION			
PB-POWER INPUT BLOCK:			
2/0 AWG thru 6 AWG 120 IN-LBS. MAX.			
8 AWG 40 IN-LBS. MAX.			
10 AWG thru 14 AWG 35 IN-LBS MAX.			

WIRE RANGE-1/0 TO #14 AWG.	
1/0 AWG thru 2 AWG 50 IN-LBS. MAX.	
4 AWG thru 6 AWG 45 IN-LBS. MAX.	
8 AWG 40 IN-LBS MAX.	
10 AWG thru 14 WG 35 IN-LBS. MAX.	

TCI, LLC CLAIMS PROPRIETARY RIGHTS IN THE MATERIAL HEREIN DISCLOSED. IT IS SUPPLIED WITHOUT PREDJUDICE TO ANY PATENT RIGHTS OF TCI AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN THEREIN WITHOUT WRITTEN PERMISSION FROM TCI.					TOLERANCES (EXCEPT AS NOTED)	 W132 N10611 Grant Drive Germantown, WI 53022					
					DECIMAL						
						.XX ±.12	HG60AW03ST, 60HP 480/3/60 UL TYPE 3R				
						.XXX±.06					
	Δ	2900 CHG TO ASC CAPS	3/5/13	DSW	FRACTIONAL ± 1/32		DRN. BY DSW DATE 08/26/08 DWG. NO. 103618DG				
Δ	2641 ADD EYEBOLTS	10/13/09	DSW	ANGULAR ± 1/2°		SCALE TO FIT SIZE C SHT. 1 OF 1					
NO	REVISION	DATE	BY								