

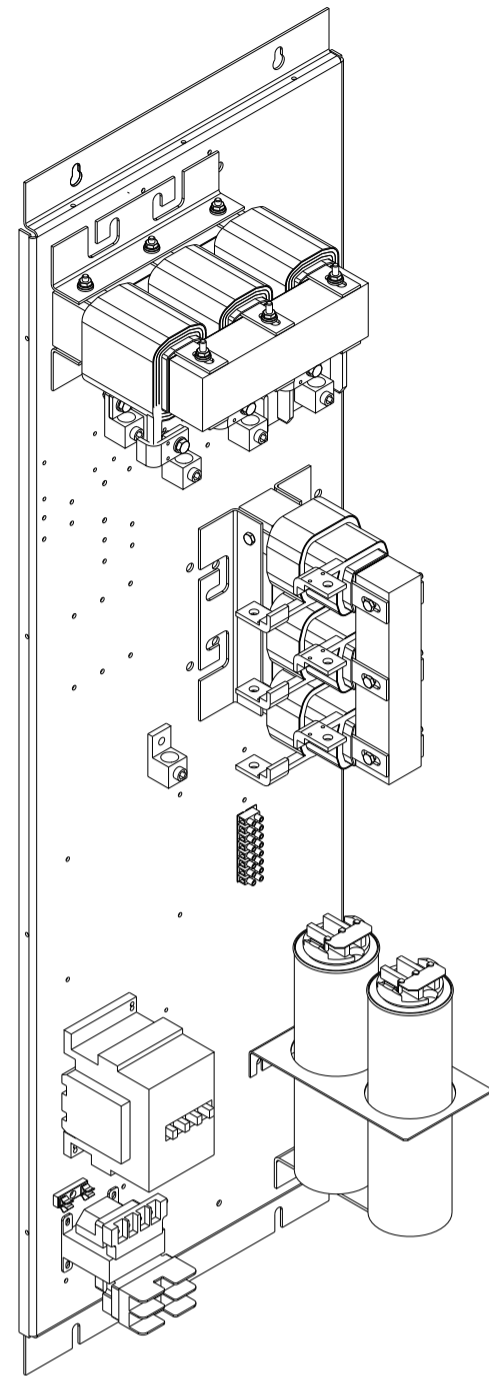


SEE 26824 FOR SCHEMATIC

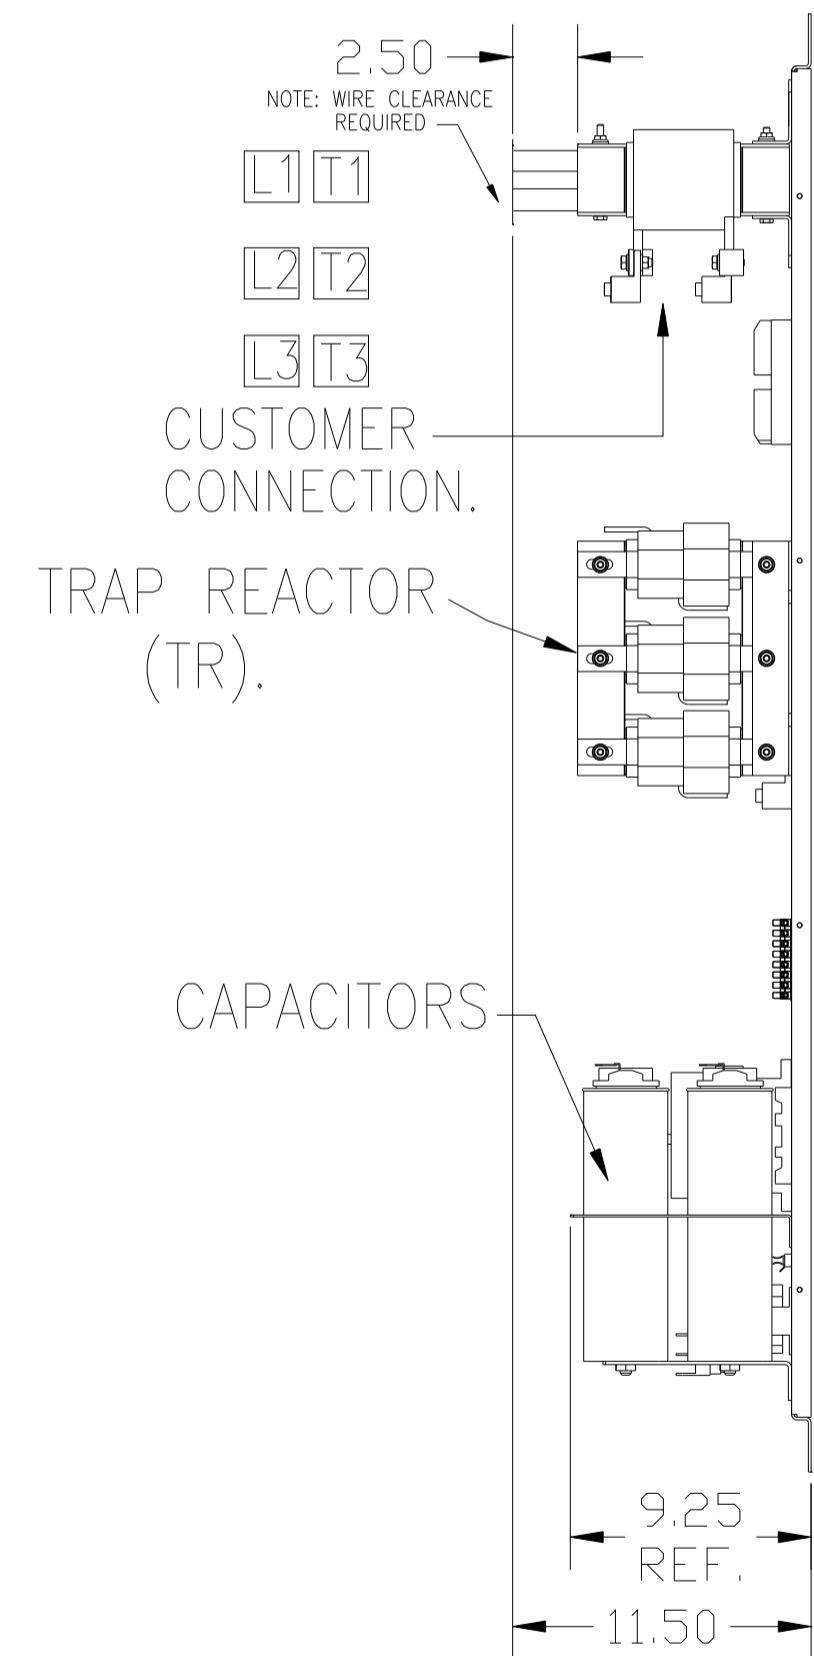

CUSTOMER CONNECTIONS:
WIRE RANGE-250MCM-6
TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:
WIRE RANGE-250MCM-6
TIGHTENING TORQUE 275 IN-LB.

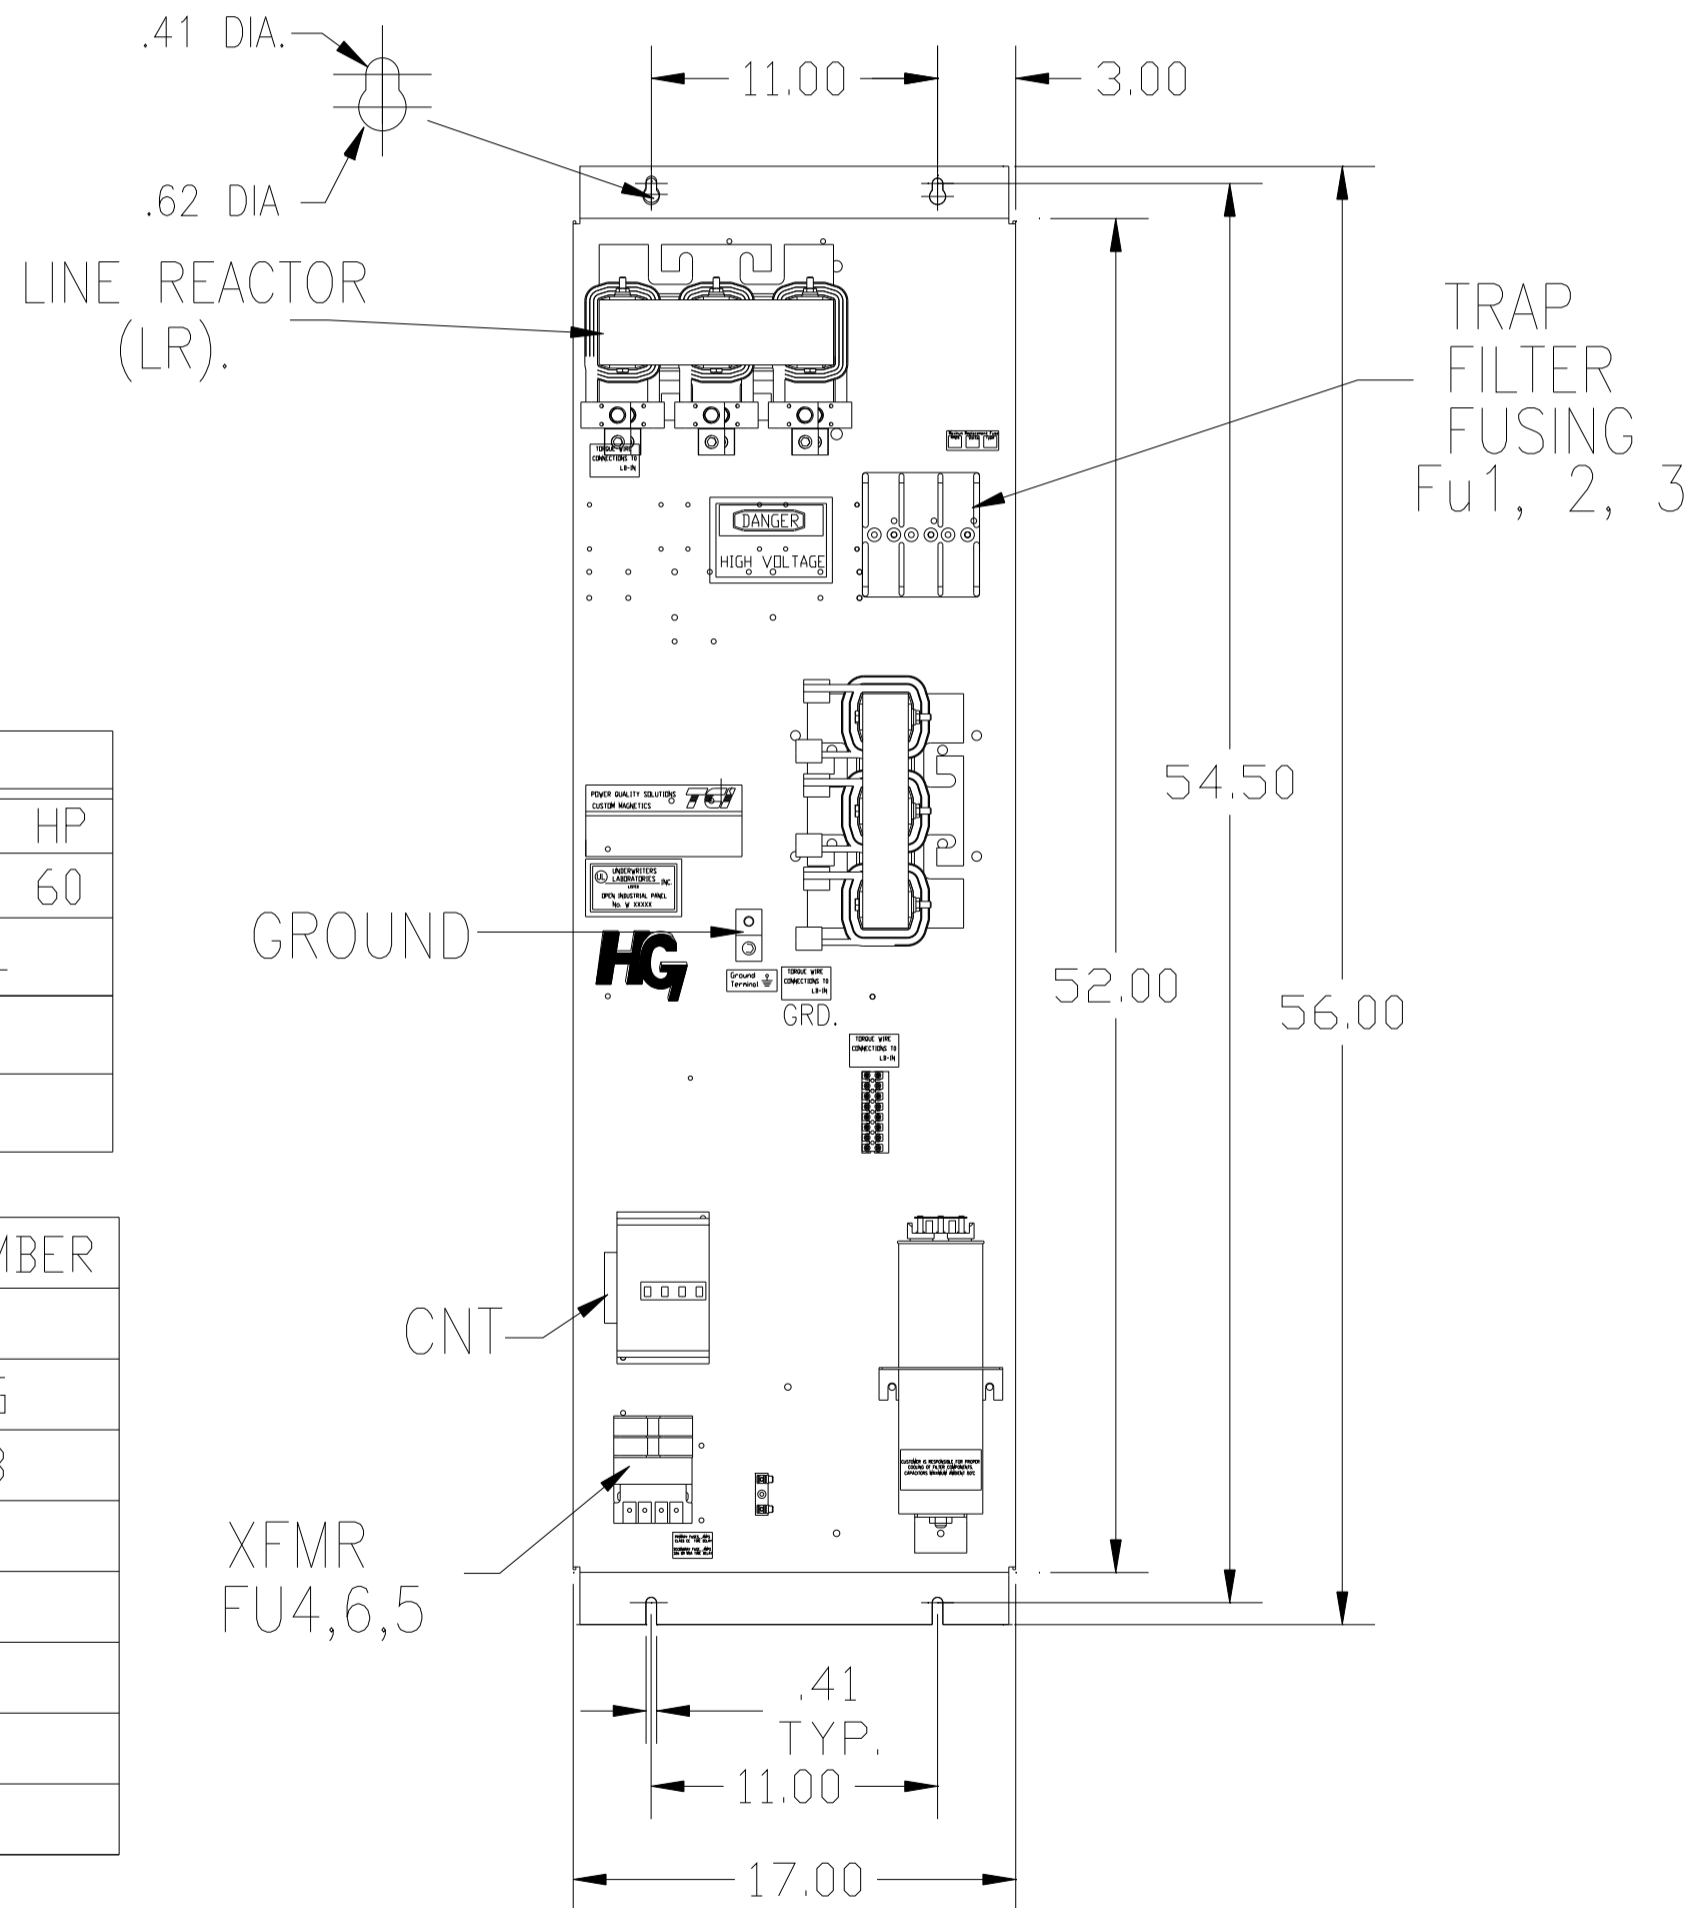

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	240	60	3	60
ENCLOSURE		WHITE OPEN PANEL			
		WITH CONTACTOR			
APPROX.WT. LBS.		140			

SYMBOL	TCI PART NUMBER
LR	KDRG22T
TR	KTR20B65HG
CAP1, 2 (10 KVAR)	KCAP10B6B
XFMR.	23891
Fu1a;2a;3a	15740
Fu4,6	24073
Fu5	13364
CNT	19245

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C.

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

				TOLERANCES (EXCEPT AS NOTED)	TCI 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ± .03	HG60BW00STC, 60HP 240/3/60, OPEN, WITH CNT
				.XXX ± .01	
				FRACTIONAL	DRN BY DSW DATE 10/10/08 DWG. NO. 103607DG
				± 1/32	
				ANGULAR	SCALE TO SCALE
				± 1/2°	
NO	REVISION	DATE	BY		SHT. 1 OF 1