
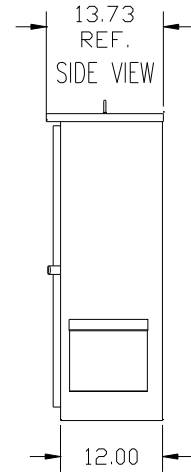
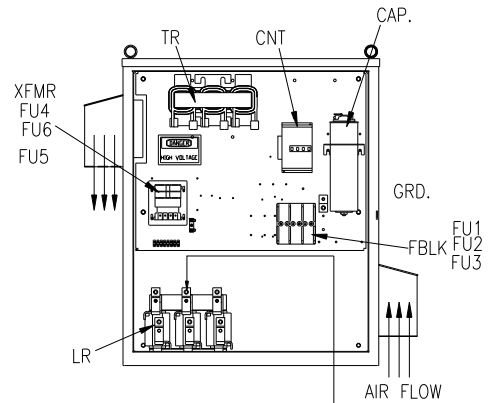
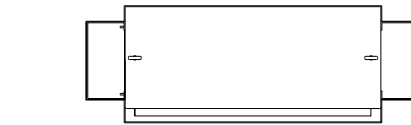
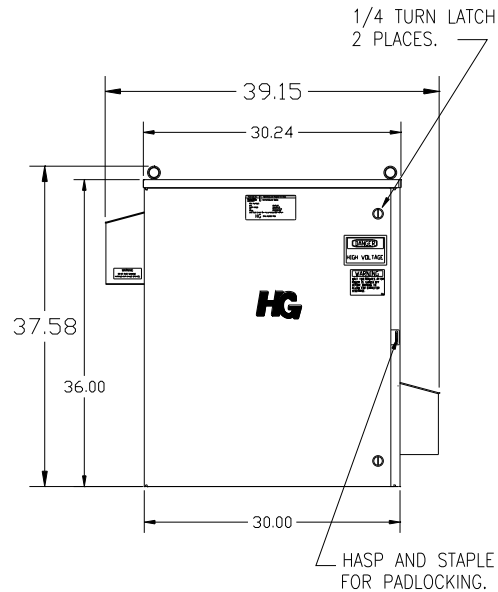
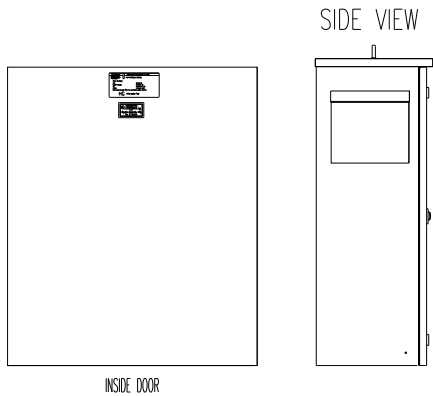
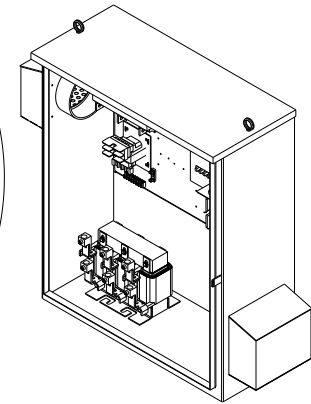
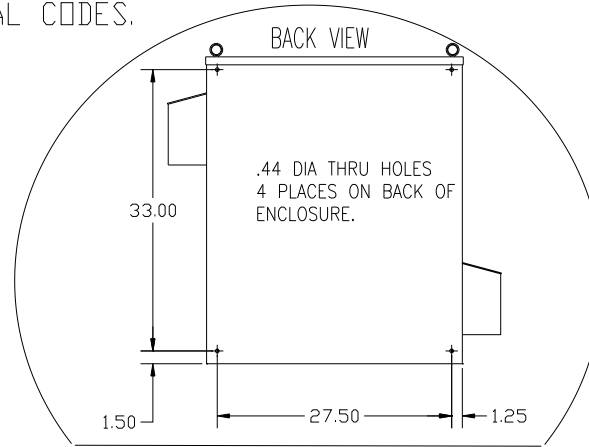


CUSTOMER IS RESPONSIBLE FOR INSTALLATION  
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY  
WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26900 FOR SCHEMATIC

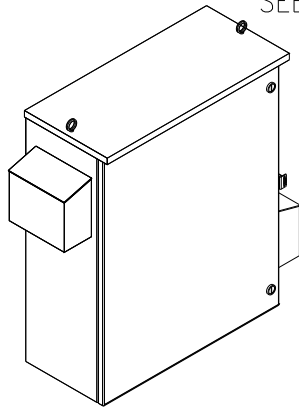

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	240	60	3	60
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS.		225			

HG60BW03STC	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FU5	X
CNT	X

CUSTOMER CONNECTIONS:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

TOLERANCES (EXCEPT AS NOTED)				TOL 7878 N. 86th STREET MILWAUKEE, WI 53224
DECIMAL	FRACTIONAL	ANGULAR	SCALE	
	XX ± .12			HG60BW03STC, 60HP 240/3/60 UL TYPE 3R
	XXX ± .03			
		± 1/32		DRN. BY DSW DATE 12/22/08 DWG. NO. 103717DG
		± 1/2°		SCALE TO FIT
NO	REVISION	DATE	BY	SHT. 1 OF 1