

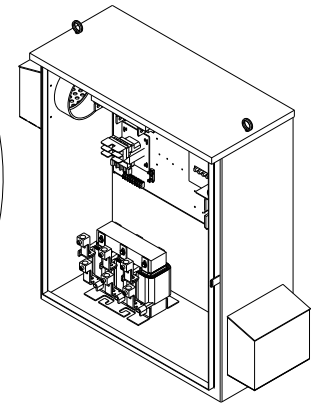
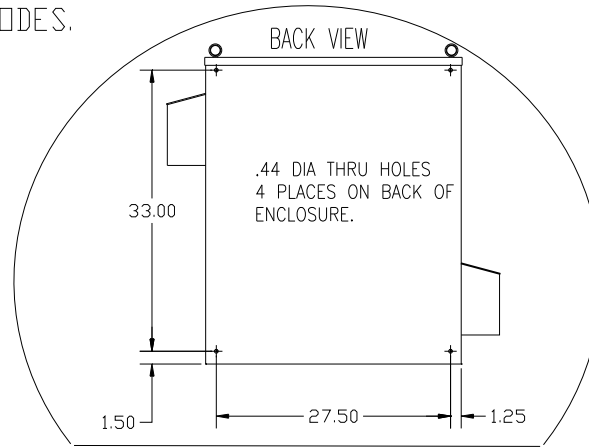







CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26898 FOR SCHEMATIC

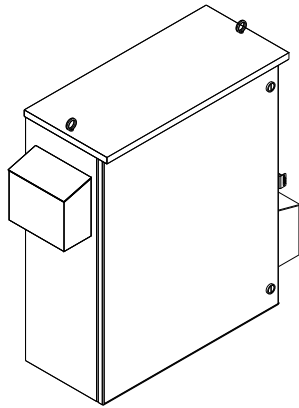

SIDE VIEW

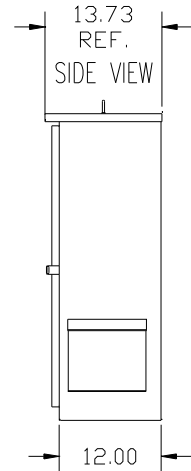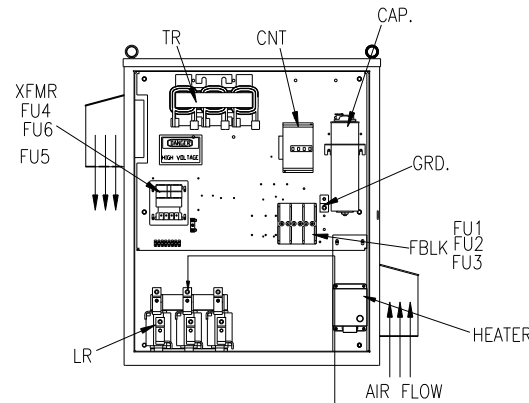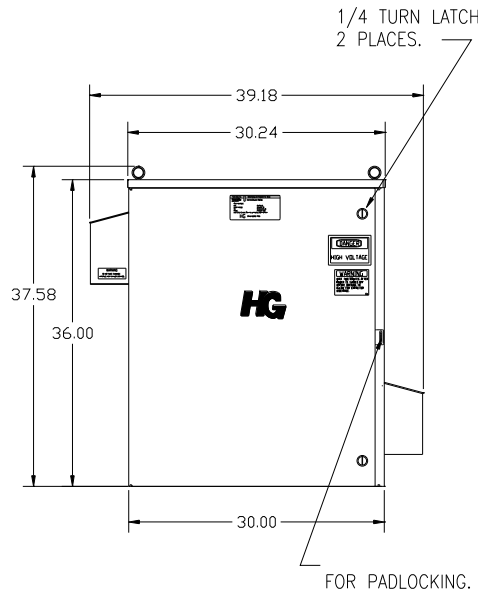

INSIDE DOOR

UNIT SPECIFICATIONS:

KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	240	60	3	60
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR, HEATER			
APPROX.WT. LBS.		230			

HG60CW03STCH	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
TRANSFORMER XFMR	X
TRANSFORMER FUSING FU4,6	X
TRANSFORMER FUSING FU5	X
CONTACTOR CNT	X
HEATER	X

CUSTOMER CONNECTIONS:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

GROUND LUG:

WIRE RANGE-250MCM-6

TIGHTENING TORQUE 275 IN-LB.

				TOLERANCES (EXCEPT AS NOTED)		TCI 7878 N. 86th STREET MILWAUKEE, WI 53224	
				DECIMAL	.XX ± .12		HG60BW03STCH, 60HP 240/3/60 UL TYPE 3R
				FRACTIONAL	.XXX ± .03		
				ANGULAR	± 1/32		
A2641 ADD EYEBOLTS		10/21/09	DSW	NO	REVISION	DATE	BY
				SCALE	TO FIT	APRVD	12/16/08
						DWG NO	103772DG
						SHT. 1	of 1