

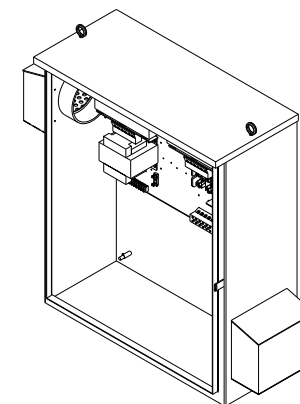
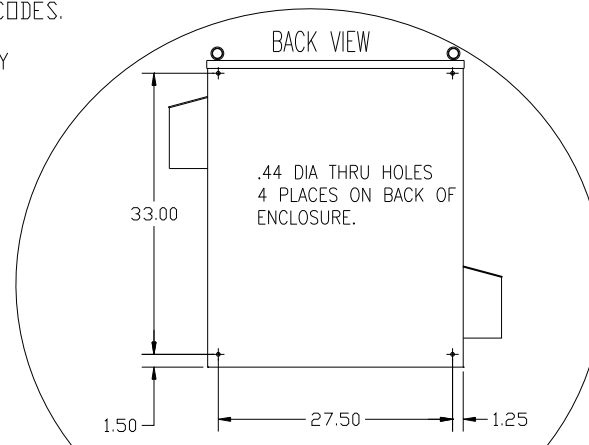


CUSTOMER IS RESPONSIBLE FOR INSTALLATION
TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.





NOTE: USE ONLY HUBS OR FITTINGS THAT COMPLY
WITH UL514B FOR TYPE 3R ENCLOSURES.

SEE DWG# 26972-1 FOR SCHEMATIC

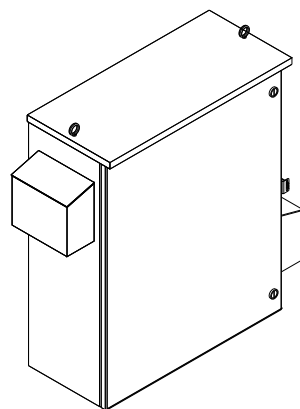

INSIDE DOOR

SIDE VIEW

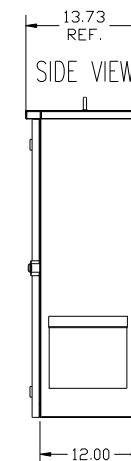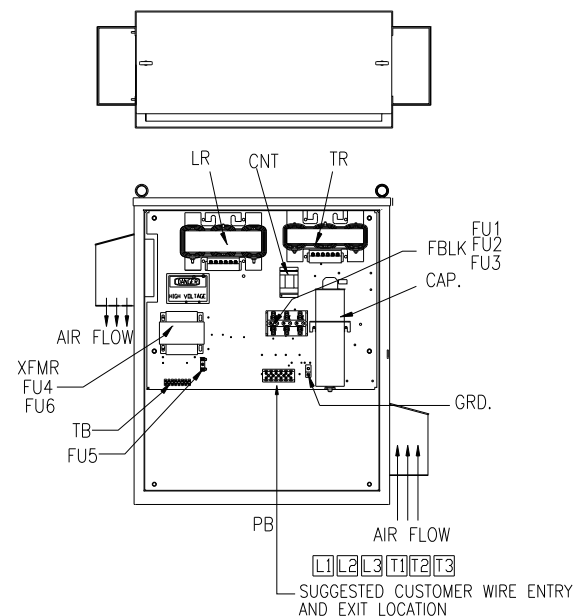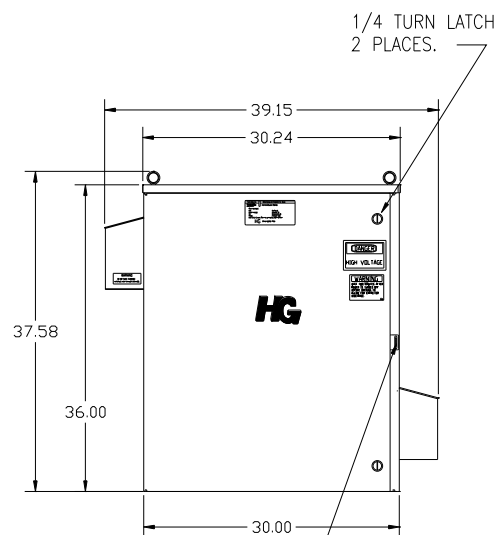

SIDE VIEW

UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
20	5TH	600	60	3	60
ENCLOSURE		UL TYPE 3R			
COLOR		WHITE			
FEATURES		CONTACTOR			
APPROX.WT. LBS.		261			

HG60CW03STC	
COMPONENTS	
LINE REACTOR LR	X
TRAP REACTOR TR	X
CAPACITOR CAP	X
TRAP FUSING FU1,2,3	X
XFMR	X
XFMR FU4,6	X
XFMR FU5	X
CNT	X

PB-POWER INPUT BLOCK:

1 AWG thru 4 AWG 35 IN.-LBS. MAX.
6 AWG thru 14 AWG 30 IN.-LBS. MAX.
16 AWG thru 20 AWG 25 IN.-LBS. MAX.
22 AWG 20 IN.-LBS. MAX.

GROUND LUG:

WIRE RANGE-2/0 TO #6 AWG.
TIGHTENING TORQUE 120 IN.-LB.

				TOLERANCES (EXCEPT AS NOTED)	TCD 7878 N. 86th STREET MILWAUKEE, WI 53224
				DECIMAL	
				.XX ±.12	HG60CW03STC, 60HP 600/3/60 UL TYPE 3R
				.XXX ±.03	
3033	UPDATE LAYOUT	2/19/14	DSW	FRACTIONAL ± 1/32	DWG. NO. 103693DG SHT. 1 OF 1
B	2682 CONTACTOR WAS 26738	05/24/10	DSW	ANGULAR ± 1/2°	
A	2641 ADD EYEBOLTS	10/16/09	DSW	SCALE TO FIT	DATE 02/18/09 APPROV. C
NO	REVISION	DATE	BY		