UNIT SPECIFICATIONS:					
KVAR	HARMONIC	VOLT	HZ	PHASE	HP
270	5TH	480	60	3	900
ENCLOSURE		WHITE OPEN PANEL			
APPROX.WT. LBS.		1195			

SYMBOL	TCI PART NUMBER
LR	KDRY4T
TR	KTR270A65HG
CAP1 – 13 (20KVAR)	23123
CAP14 (10KVAR)	16448
Fu1, 2, 3	13330

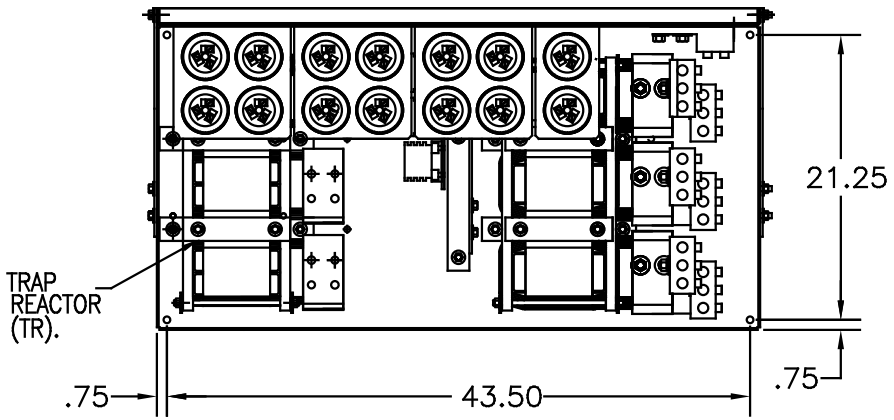

CUSTOMER CONNECTIONS:

WIRE RANGE–THREE 800MCM–350MCM

TIGHTENING TORQUE 275 IN–LB.

GROUND LUG:

WIRE RANGE–THREE 800MCM–350MCM

TIGHTENING TORQUE 275 IN–LB.

SEE 25078 FOR SCHEMATIC

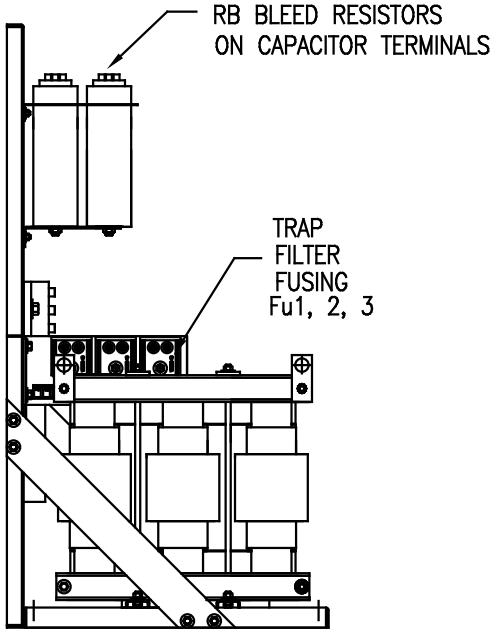

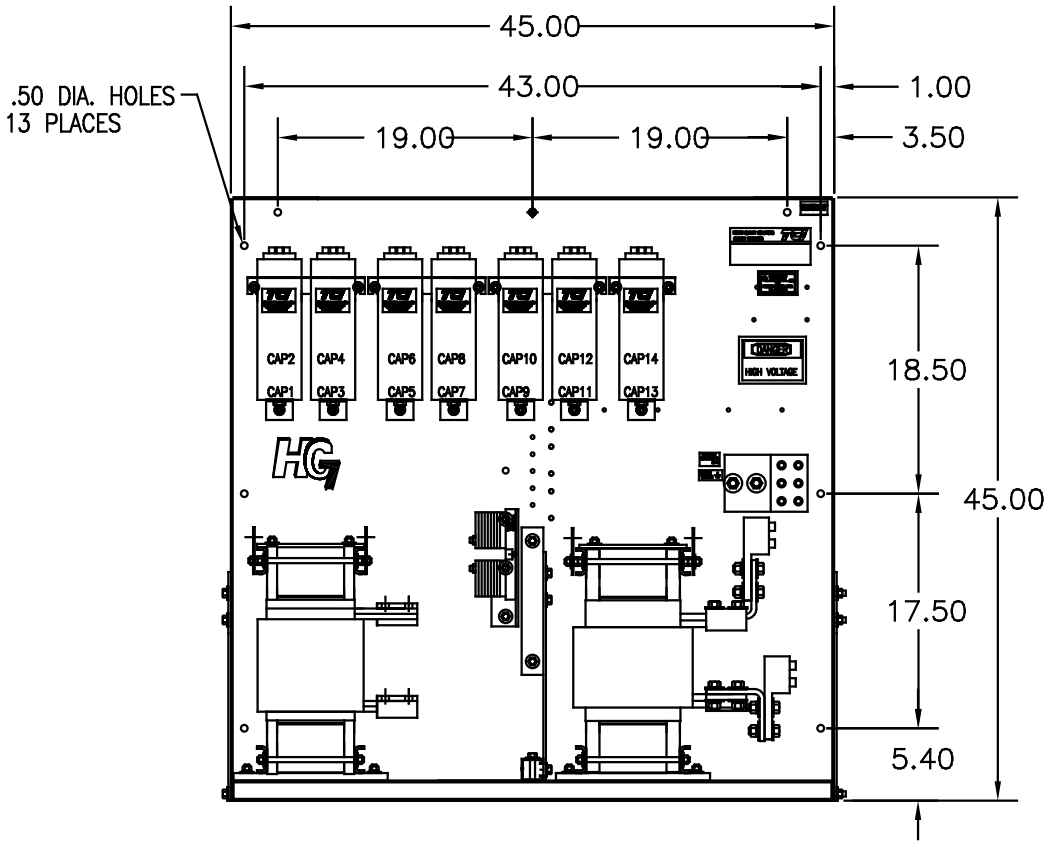

CUSTOMER CONNECTIONS:

L1 L2 L3

T1 T2 T3

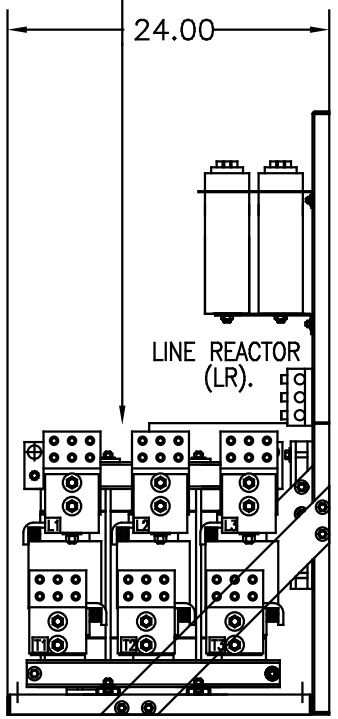

CUSTOMER IS RESPONSIBLE FOR PROPER COOLING OF FILTER COMPONENTS. CAPACITORS MAXIMUM AMBIENT 50°C

CUSTOMER IS RESPONSIBLE FOR INSTALLATION TO MEET ALL NATIONAL AND LOCAL ELECTRICAL CODES.

NO	REVISION	DATE	BY

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
±1/32
ANGULAR
±1/2°

TCI 7878 N. 86th STREET MILWAUKEE, WI 53224

HG900AW00ST HG7 STANDARD 900HP, 480/3/60 OPEN

DRN. BY DSW | DATE 05/25/05 | DWG. NO. C 102692DG

SCALE TO FIT | APPVD. | SHT. 1 OF 1